



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
317	(18,19)RS-3	IROQUOIS	28	27
STA.		TO STA.		
FED. ROAD DIST. NO. .		ILLINOIS FED. AID PROJECT		

CONTRACT #66417

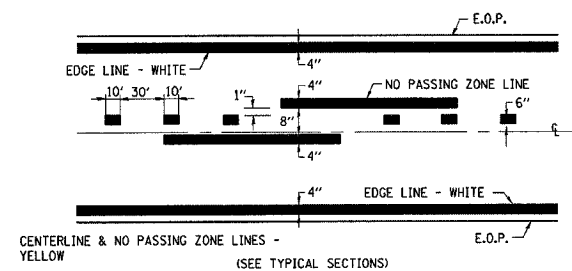

PAVEMENT MARKING

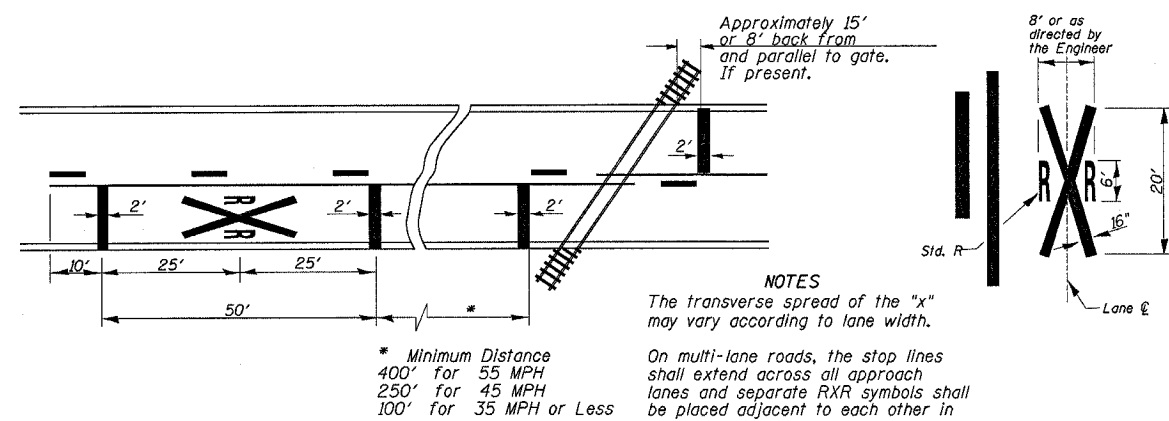


NOTES

The transverse spread of the "X" may vary according to lane width.


On multi-lane roads, the stop lines shall extend across all approach lanes and separate RXR symbols shall be placed adjacent to each other in each lane.

* Minimum Distance
400' for 55 MPH
250' for 45 MPH
100' for 35 MPH or Less


PAVEMENT MARKINGS AT RAILROAD-HIGHWAY GRADE CROSSING

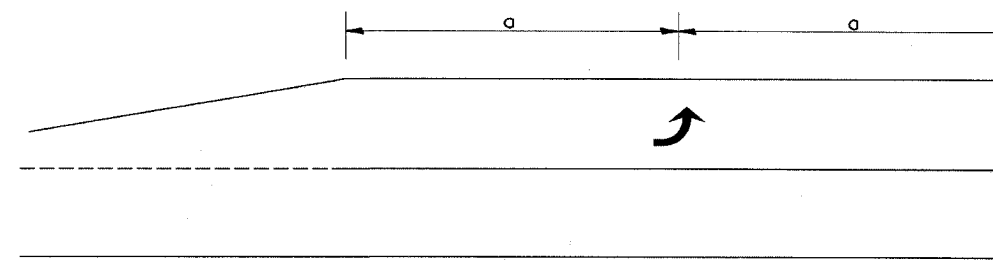

99' AND UNDER

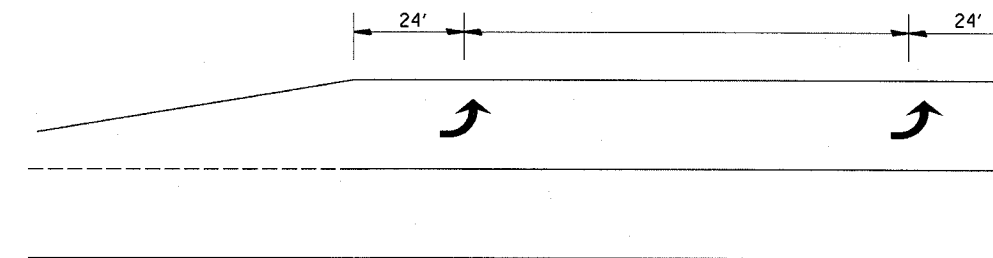

100' TO 149'

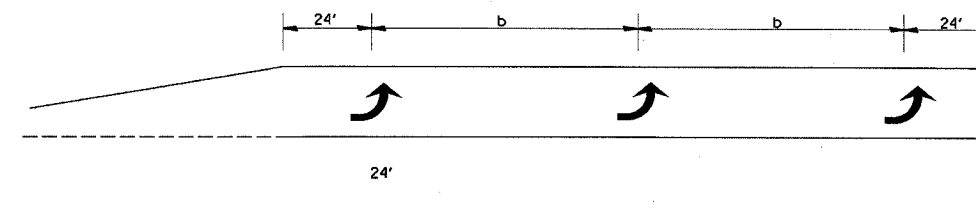

150' AND LONGER

TYPICAL PLACEMENT OF ARROWS IN TURN LANES