


BRIDGE NO. 2
SN. 039-0050
2011 ADT: 16200
8% TRUCKS
INVENTORY RATING: 20.6
OPERATING RATING: 36.7
MURPHYSBORO TOWNSHIP

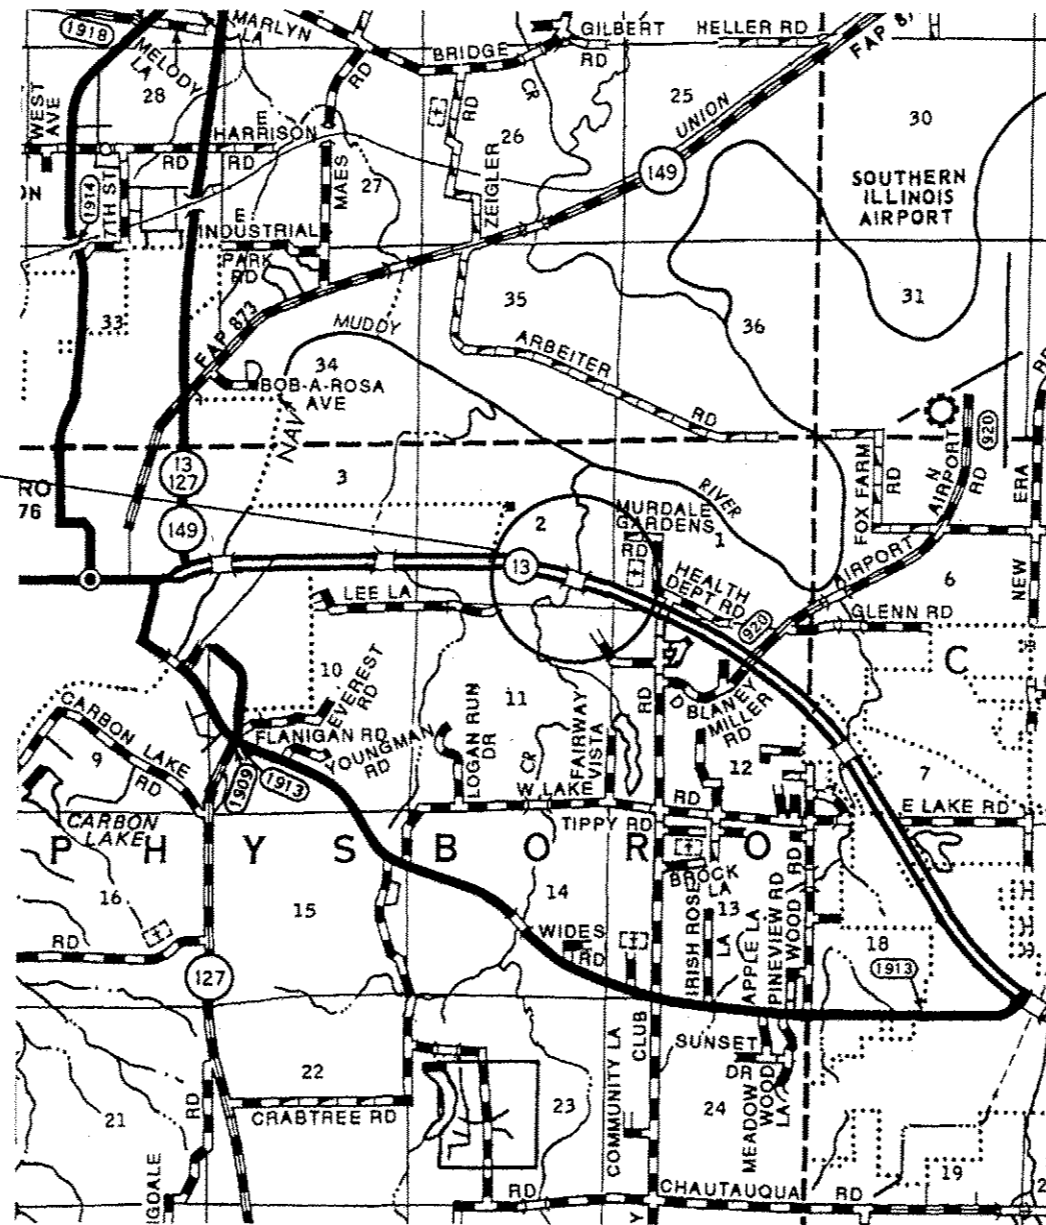

JACKSON COUNTY

NOTES

CLEANING AND PAINTING OF THE DESIGNATED EXISTING STRUCTURAL STEEL SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS FOR "CLEANING AND PAINTING EXISTING STEEL STRUCTURES" AND "CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUES", ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN 5 FEET (MEASURED ALONG THE BEAM) OF EITHER SIDE OF DECK JOINTS AND THE EXTERIOR SURFACES AND BOTTOM OF THE BOTTOM FLANGE OF THE FULL LENGTH OF FASCIA BEAMS SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING - SSPC-SP10. THE AREAS CLEANED PER NEAR WHITE BLAST CLEANING SHALL BE PAINTED ACCORDING TO THE REQUIREMENTS OF PAINT SYSTEM 1 - OZ/E/U. THE COLOR OF THE FINAL FINISH COAT FOR INTERIOR STEEL SURFACES SHALL BE GRAY, MUNSELL NO. 5B 7/1. THE COLOR OF THE FINAL FINISH COAT FOR EXTERIOR STEEL SURFACES OF FASCIA BEAMS SHALL BE INTERSTATE GREEN, MUNSELL NO. 7.5G 1/2.

FILE NAME *	USER NAME * gautneyrk	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SN 039-0050 IL 13 WB OVER MUD CREEK		RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.				
ca:\pwork\p1dot\gautneyrk\d0319666\78	41-ahr-plan.dgn	DRAWN -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	VAR.	D9 BRIDGE PAINTING 2013-1	VARIOUS	33	12
#MODELNAME*	PLOT SCALE * 48.0035 / in.	CHECKED -	REVISED -		CONTRACT NO. 78341										
	PLOT DATE * 10/16/2012	DATE -	REVISED -		ILLINOIS FED. AID PROJECT										