
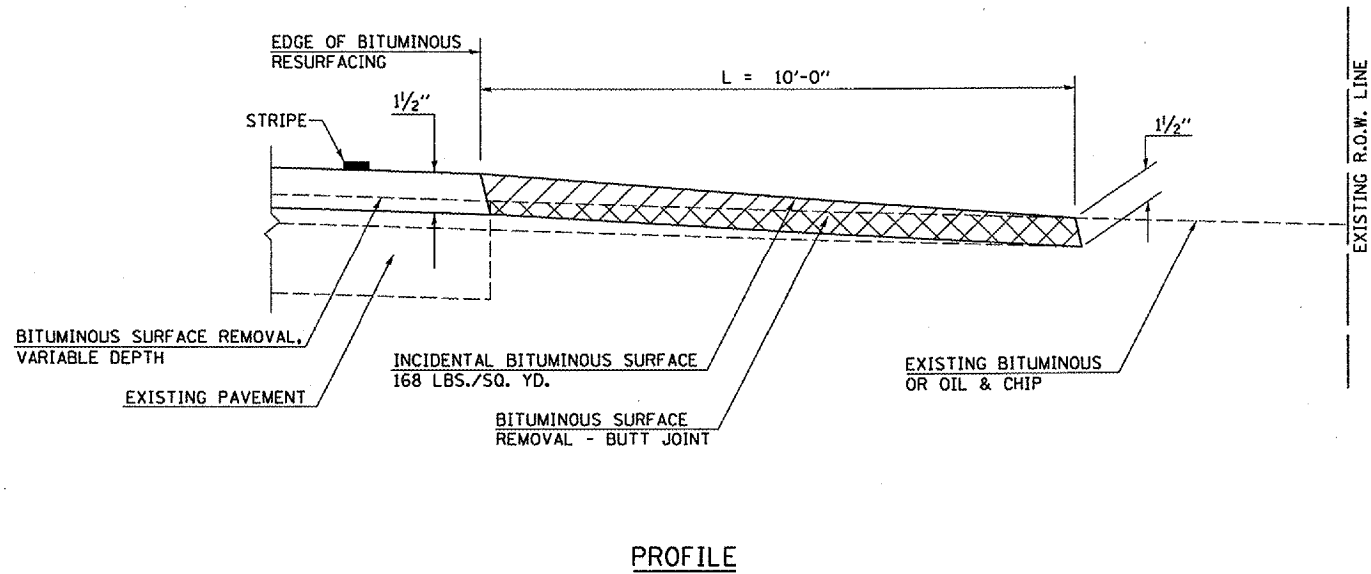




DETAIL OF SIDEROAD RETURNS (RURAL SECTION WITH BITUMINOUS OR OIL & CHIP)

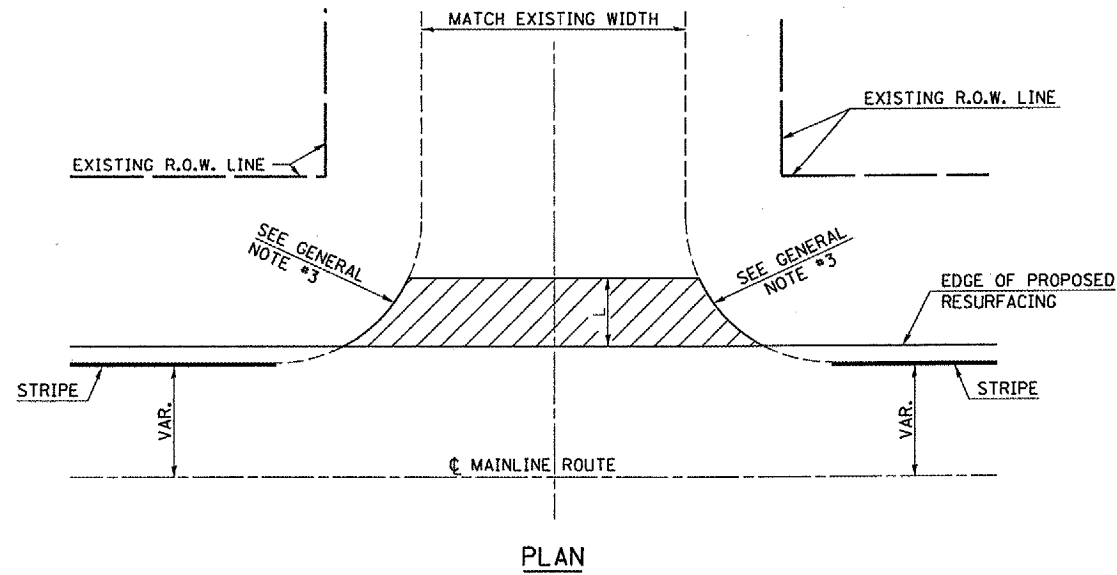

GENERAL NOTES

1. THE EXISTING SURFACE SHALL BE PREPARED IN ACCORDANCE WITH SECTION 408 OF THE STANDARD SPECIFICATIONS.
2. THE INCIDENTAL BITUMINOUS SURFACING IS INTENDED TO RESURFACE THE EXISTING SIDEROAD TO A LENGTH OF 10'-0" FROM THE EDGE OF PROPOSED RESURFACING.
3. THE INCIDENTAL BITUMINOUS SURFACING SHALL MATCH THE EXISTING RADIUS.

DETAIL OF SIDEROAD RETURNS (CURB & GUTTER SECTION THROUGH POTOMAC)

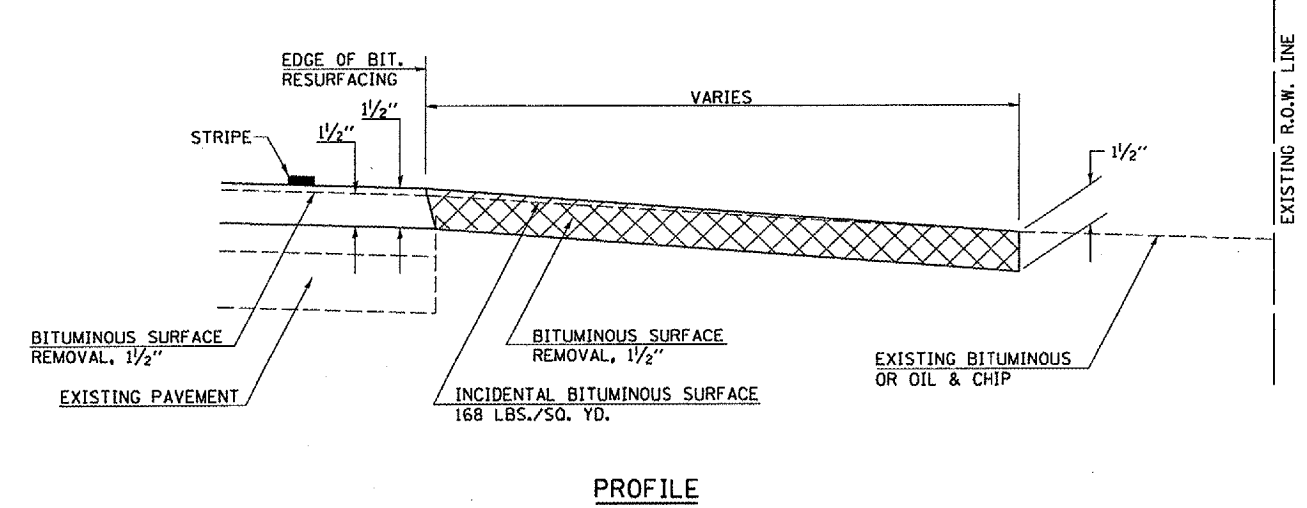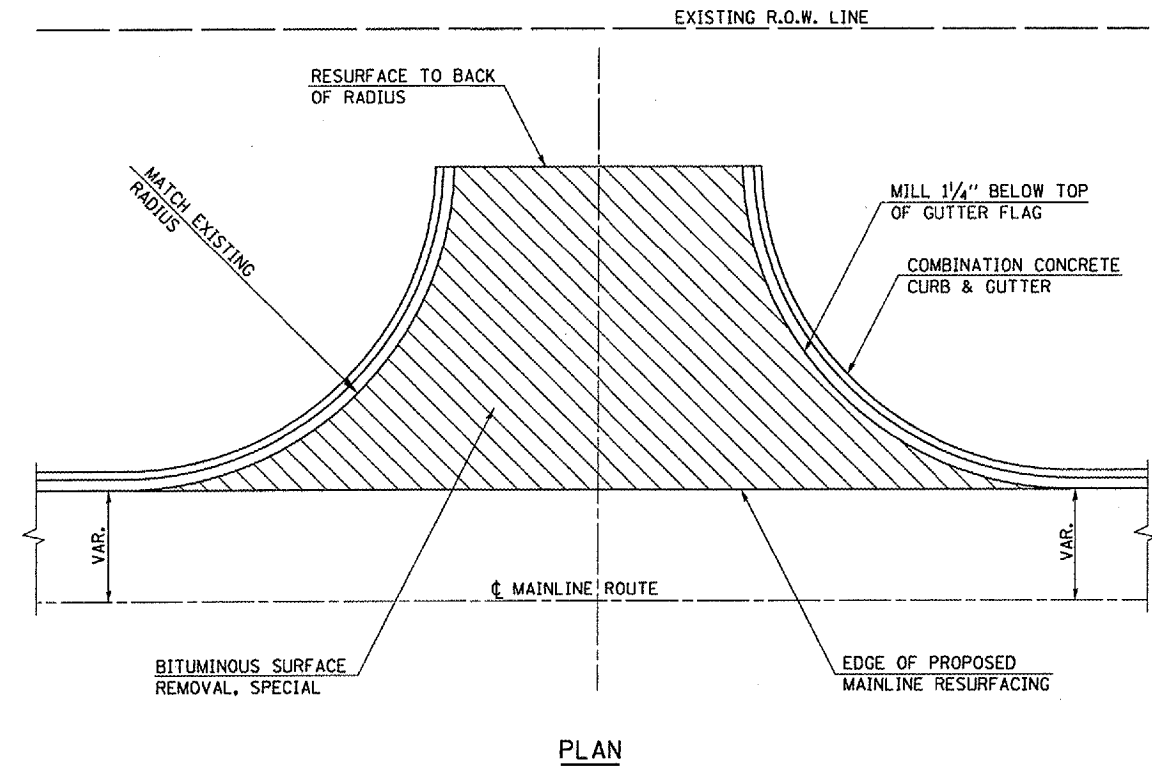

GENERAL NOTES

1. THE EXISTING SURFACE SHALL BE PREPARED IN ACCORDANCE WITH SECTION 408 OF THE STANDARD SPECIFICATIONS.
2. THE INCIDENTAL BITUMINOUS SURFACING IS INTENDED TO RESURFACE THE EXISTING SIDEROADS IN THEIR ENTIRETY. THE EXISTING SIDEROADS SHOULD BE RESURFACED TO MAINTAIN THEIR CURRENT RADII AND SHALL BE RESURFACED TO THE BACK OF RADII.