


CENTRAL BUREAU OF  
 2012 NOV 13 P 1:35  
 LOCAL ROADS & STREETS

STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION  
 PLANS FOR PROPOSED  
**HIGHWAY BRIDGE PROGRAM**

TOWNSHIP ROUTE 272A (LINDALE ROAD)  
 EAST ELDORADO TOWNSHIP  
 SECTION 10-04119-00-BR  
 PROJECT NO. BROS-165(35)  
 JOB NO. C-99-521-11  
 SPOIL BANK DITCH

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
TR 272A	10-04119-00-BR	SALINE	12	1
PROJECT NO. BROS-165(35)			CONTRACT NO. 99479	

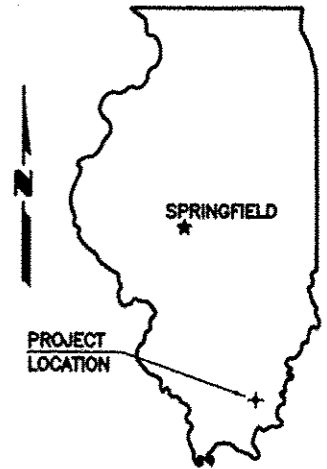

INDEX OF SHEETS

1. COVER SHEET
  2. PLAN AND PROFILE
  3. GENERAL PLAN AND ELEVATION
  4. 33" X 36" PPC DECK BEAM
  5. 33" X 36" PPC DECK BEAM DETAILS
  6. 33" X 48" PPC DECK BEAM
  7. 33" X 36" PPC DECK BEAM DETAILS
  8. ABUTMENT
  9. STEEL RAILING, TYPE S1
  10. NAME PLATES
  11. PILING DETAILS
  12. CROSS SECTIONS
- STANDARDS 000001-06 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS  
 280001-07 TEMPORARY EROSION CONTROL SYSTEMS  
 635006-03 REFLECTOR AND TERMINAL MARKER PLACEMENT  
 701901-02 TRAFFIC CONTROL DEVICES  
 BLR 21-9 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES

<u>SUMMARY OF QUANTITIES</u>			
<u>CODE NO.</u>	<u>PAY ITEM</u>	<u>UNIT</u>	<u>TOTAL</u>
* X2501000	SEEDING, CLASS 2 (SPECIAL)	ACRE	0.3
20200100	EARTH EXCAVATION	CU YD	15
* 20300100	CHANNEL EXCAVATION	CU YD	271
* 28100807	STONE DUMPED RIPRAP, CLASS A4	TON	197
* 40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	608
* 50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50200100	STRUCTURE EXCAVATION	CU YD	60
50300225	CONCRETE STRUCTURES	CU YD	24.6
50300280	CONCRETE ENCASEMENT	CU YD	4.1
50400605	PRECAST PRESTRESSED CONCRETE DECK BEAMS (33" DEPTH)	SQ FT	1,920
50800105	REINFORCEMENT BARS	POUND	3,098
Δ 50900205	STEEL RAILING, TYPE S1	FOOT	164
51201400	FURNISHING STEEL PILES HP10X42	FOOT	372
51202305	DRIVING PILES	FOOT	372
51500100	NAME PLATES	EACH	1
67100100	MOBILIZATION	L SUM	1
Δ 78201000	TERMINAL MARKER -- DIRECT APPLIED	EACH	4

\* SEE SPECIAL PROVISIONS    Δ SPECIALTY ITEMS

**SALINE COUNTY**



LOCATION MAP

SCALE: 1" = 2 MILES

NET LENGTH OF IMPROVEMENT = 510.00 FT. = 0.0966 MILES

CLASSIFICATION : LOCAL ROAD (RURAL)  
 ADT : 10  
 DESIGN SPEED : 30 MPH

CONTRACT NO. 99479




10-18-12

**E. MILLER ENGINEERING, INC.**  
 CONSULTING ENGINEERS  
 HARRISBURG, ILLINOIS

*Edward W. Miller*  
 Edward W. Miller  
 PROFESSIONAL ENGINEER  
 #062-025277  
 EXPIRES NOV. 30, 2013

PROPOSED IMPROVEMENT



ILLINOIS DEPARTMENT OF TRANSPORTATION	
Approved	<u>11-02-12</u> <i>Ray Brown</i> East Eldorado Township Road Commissioner
Approved	<u>11-02-12</u> <i>[Signature]</i> Saline County Engineer
Passed	<u>11/9/2012</u> <i>Deri W. Hallock</i> District 9 Engineer of Local Roads and Streets
Releasing for Bid Based on Limited Review	<u>11/9/12</u> <i>Omer Omar</i> Deputy Director of Highways, Region 5 Engineer Illinois Department of Transportation