

Location	Concrete Removal (Special) SQ YD	Attenuator Base SQ YD	Relocate Impact Attenuator EACH
	59.5	59.5	


THE CONTRACTOR AND THE ENGINEER SHALL DETERMINE THE LAYOUT FOR THE IMPACT ATTENUATORS

NOTE:
THIS DETAIL APPLIES TO:
STRUCTURE NO. 6S084B055L000.71

THE FIGURES WITHIN EACH CIRCLE ON THE LAYOUT DETAIL INDICATE THE AMOUNT OF SAND IN POUNDS X 100 CONTAINED IN EACH MODULE

LONGITUDINAL GRADE OF ATTENUATOR BASE SHALL MATCH THE MAINLINE PROFILE

ALL DISTURBED AREAS SHALL RECEIVE SEEDING, CLASS 2 AND FERTILIZER AT THE FOLLOWING RATES:
RATIO 1:1:1
RATE 270 lb NUTRIENTS/ACRE
(90 lb NITROGEN, 90 lb PHOSPHORUS, 90lb POTASSIUM)
SEEDING AND FERTILIZER NUTRIENTS ARE INCLUDED IN THE COST FOR INERTIAL BARRIER INSTALLATION

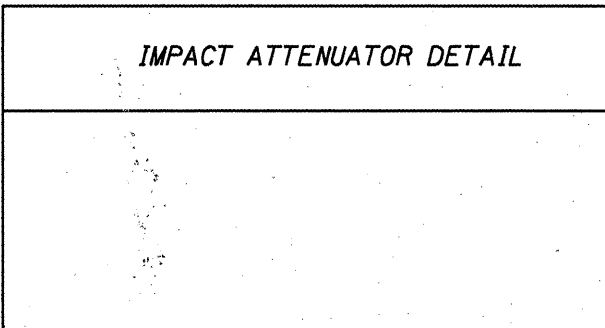

DESIGNED -	20
CHECKED -	EXAMINED
DRAWN -	PASSED
CHECKED -	

ENGINEER OF BRIDGE DESIGN
ENGINEER OF BRIDGES AND STRUCTURES