



PROJECT Structure 078-0031, Illinois Route 71, Putnam County, IL
 CLIENT TransSystems Corp., Schaumburg, IL
 BORING B-3 DATE STARTED 1-23-98 DATE COMPLETED 1-23-98 JOB 43,757
 ELEVATIONS WATER TABLE
 GROUND SURFACE 219.2 WHILE DRILLING DRY
 END OF BORING 198.0 AT END OF BORING DRY
 24 HOURS Backfilled
 STA 9+273, 4.9m Lt.

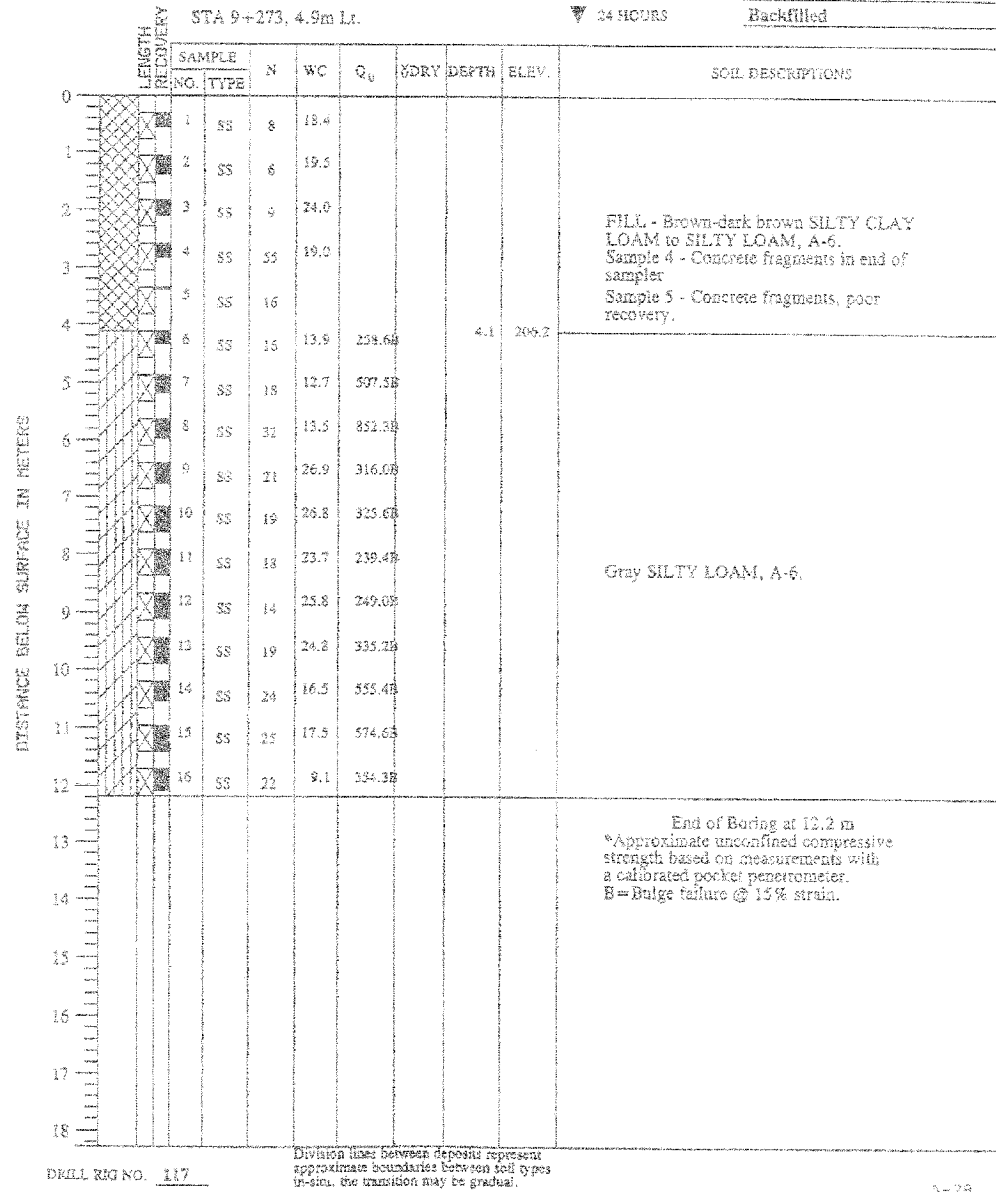

PROJECT Structure 078-0031, Illinois Route 71, Putnam County, IL
 CLIENT TransSystems Corp., Schaumburg, IL
 BORING B-4 DATE STARTED 2-4-98 DATE COMPLETED 2-4-98 JOB 43,757
 ELEVATIONS WATER TABLE
 GROUND SURFACE 210.3 WHILE DRILLING 12.5m
 END OF BORING 196.6 AT END OF BORING Caved @ 3.7m
 24 HOURS Backfilled
 STA 9+268, 4.1m Rt.

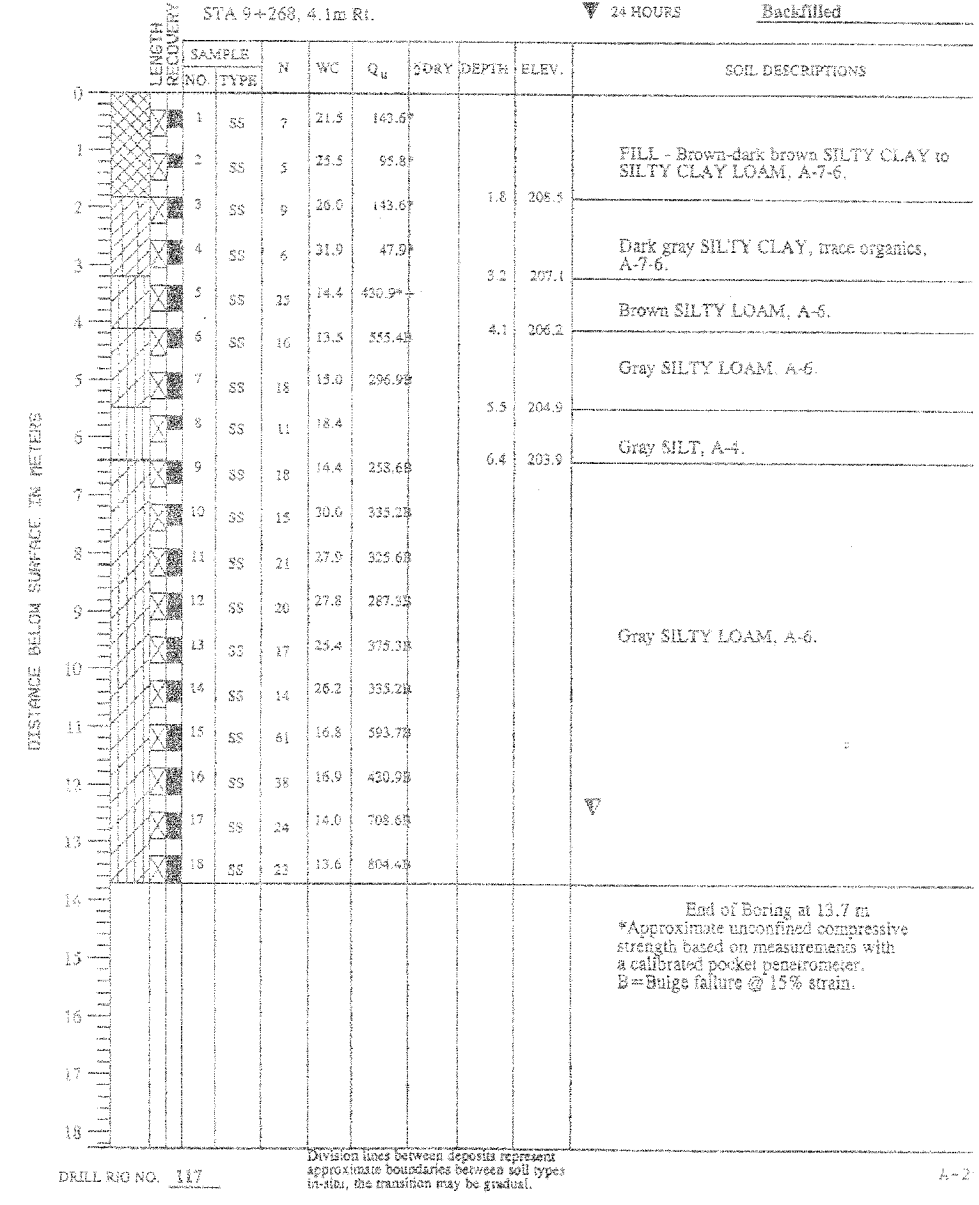

ILLINOIS DEPARTMENT OF TRANSPORTATION
SOIL BORINGS - 1 OF 2
 ILLINOIS ROUTE 71 OVER AN INTERMITTENT STREAM
 F.A.P. RT. 619 - SECTION 120 BR-1
 PUTNAM COUNTY
 STATION 9+268.500
 STRUCTURE No. 078-2008

REVISIONS	
NAME	DATE

DATE: 8/31/06 DESIGNED BY: MV DRAWN BY: KDS
 CHECKED BY: SG CHECKED BY: MV

TRANSYSTEMS CORPORATION
 300 PENNINGTON DR., SUITE 200
 SCHMIDGALL, IL 60196-1000
 TEL: 815-351-5000
 FAX: 815-351-5004