

### TYPICAL DIAGONAL SPACING

SPEED LIMIT RANGE	DIAGONAL SPACING	
	CONTINUOUS	INTERSECTION CHANNELIZATION
30-45 MPH	75 FT.	20 FT.
OVER 45 MPH	150 FT.	30 FT.


CONTINUOUS DIAGONALS

MINIMUM OF 5 DIAGONALS REQUIRED

DUAL LEFT TURN ARROWS

31.2 SQ. FT. MINIMUM OF 2 SETS REQUIRED

A MINIMUM OF TWO PAIRS OF DUAL LEFT TURN ARROWS SHALL BE USED. THE DUAL LEFT TURN ARROWS SHALL BE WHITE IN COLOR. THE INTERVAL BETWEEN SETS OF DUAL LEFT TURN ARROWS SHOULD BE 200' AND 300'.

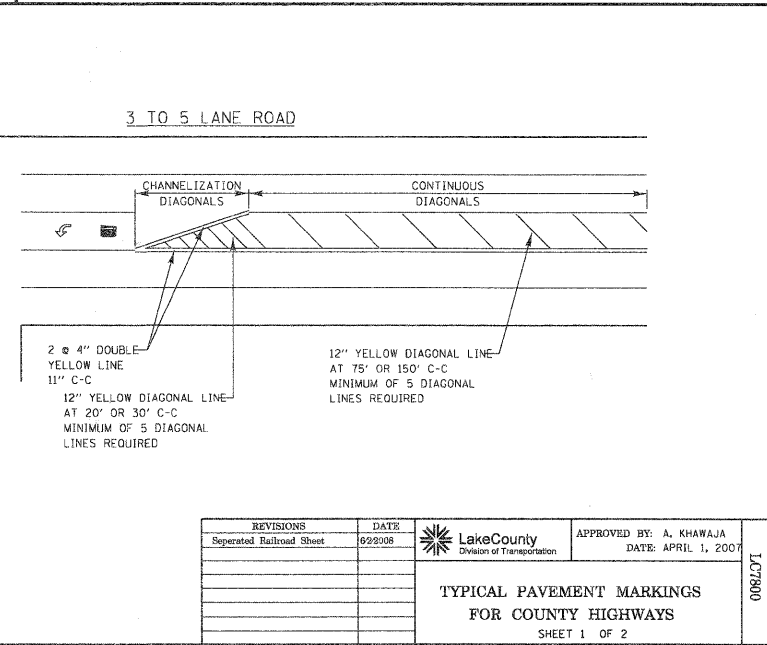

REVISIONS / REMARKS				
NO.	DESCRIPTION	DATE	BY	SURVEYOR/DSGNER/LIAISON/ PLOTTED BY:

FILE NAME: #FILE#

LakeCounty  
Division of Transportation

ROUTE	SECTION	SECTION NUMBER	SHEET	SHEETS
CHXX	XXX	XX-XXXXX-XX-XX	XXX	XXX

LAKE COUNTY STANDARDS & DETAILS

REVISIONS	DATE	APPROVED BY:
Separated Railroad Sheet	02/2008	A. KHAWAJA

LakeCounty  
Division of Transportation

DATE: APRIL 1, 2007

TYPICAL PAVEMENT MARKINGS FOR COUNTY HIGHWAYS

SHEET 1 OF 2

086127

REVISIONS / REMARKS				
NO.	DESCRIPTION	DATE	BY	DESIGNED BY: / CHECKED BY: / DATE:

FILE NAME:

HDR  
30 N LaSalle Street, Suite 3220  
Chicago, IL 60602  
312-443-4982  
HDR Engineering, Inc.

LakeCounty  
Division of Transportation

ROUTE	SECTION	SECTION NUMBER	SHEET	SHEETS
CH	136	04-00136-06-CH	101	107

63415