

# CONSTRUCTION PLANS FOR CASEY MUNICIPAL AIRPORT

## CASEY, CLARK COUNTY, ILLINOIS


### APPLY POROUS FRICTION COURSE AND MARK RUNWAY 4-22

SUMMARY OF QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	AS BID QUANTITY	AS BUILT QUANTITY
AR150530	TRAFFIC MAINTENANCE	L. SUM	1	
AR152480	SHOULDER ADJUSTMENT	SQ. YD.	617	
AR201660	BITUMINOUS CRACK REPAIR	LIN. FT.	17,600	
AR201666	BASE COURSE CRACK REPAIR	SQ. YD.	466	
AR201910	REMOVE & REPLACE BIT. PAVEMENT	SQ. YD.	95	
AR401110	PAVEMENT PREPARATION	L. SUM	1	
AR401655	BUTT JOINT CONSTRUCTION	SQ. YD.	363	
AR402622	POROUS FRICTION COURSE, 0.10'	SQ. YD.	35,110	
AR603510	BITUMINOUS TACK COAT	GAL.	10,533	
AR620520	PAVEMENT MARKING-WATERBORNE	SQ. FT.	28,099	

ILLINOIS PROJECT NO. 1H8-3625  
AIP PROJECT NO. 3-17-0014-B8

DECEMBER 15, 2006

INDEX OF SHEETS	
NO.	DESCRIPTION
1	COVER SHEET
2	IMPROVEMENT AND SAFETY PLAN
3	TYPICAL SECTIONS AND SPECIAL DETAILS
4-5	RUNWAY 4-22 PLAN AND PROFILE
6	RUNWAY MARKING LAYOUT

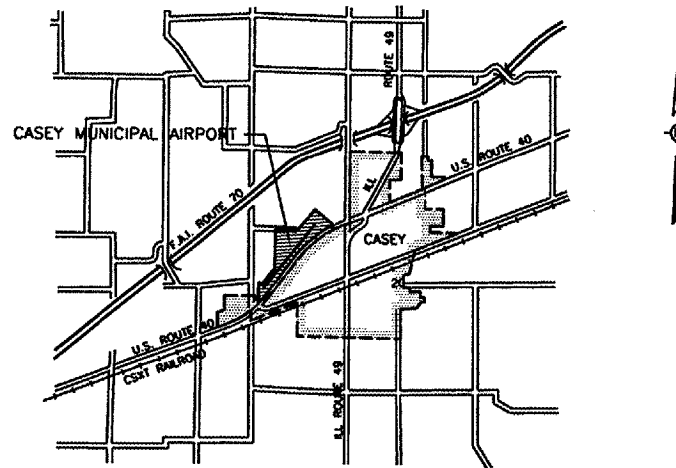

VICINITY MAP

<p>EXPIRES 11/30/07 ENGINEER'S SEAL</p>	PLANS PREPARED BY : <b>HUTCHISON ENGINEERING, INC.</b> JACKSONVILLE, ILLINOIS	CITY OF CASEY, ILLINOIS
	SUBMITTED <i>Doug J. Hutchison</i> DATE <i>November 15, 2006</i>	APPROVED <i>Scott C. ...</i> MAYOR DATE <i>December 4, 2006</i>