



EXISTING TYPICAL SECTION
STA. 18+00 TO STA. 40+00

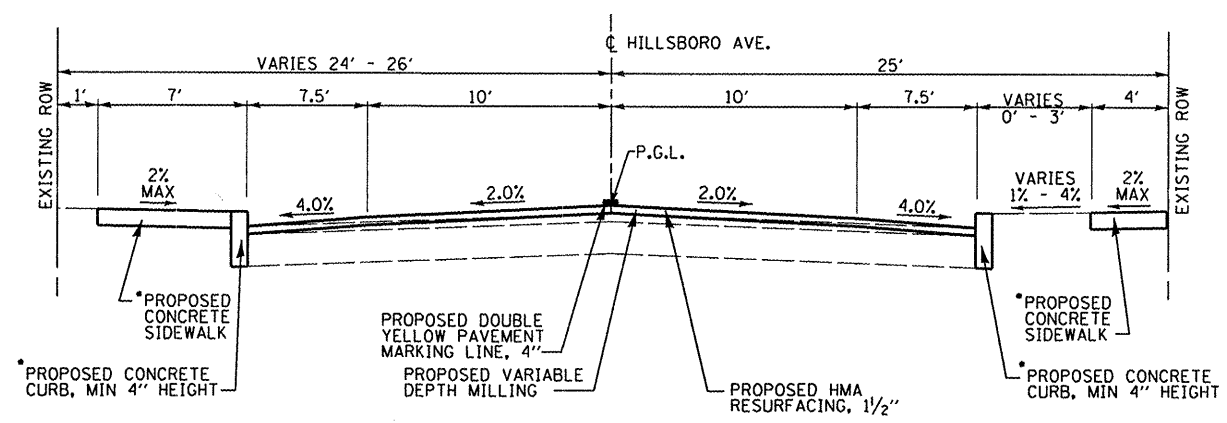


*SEE PLANS FOR SPECIFIC CURB AND SIDEWALK REPLACEMENT LOCATIONS

PROPOSED TYPICAL SECTION
STA. 18+00 TO STA. 40+00

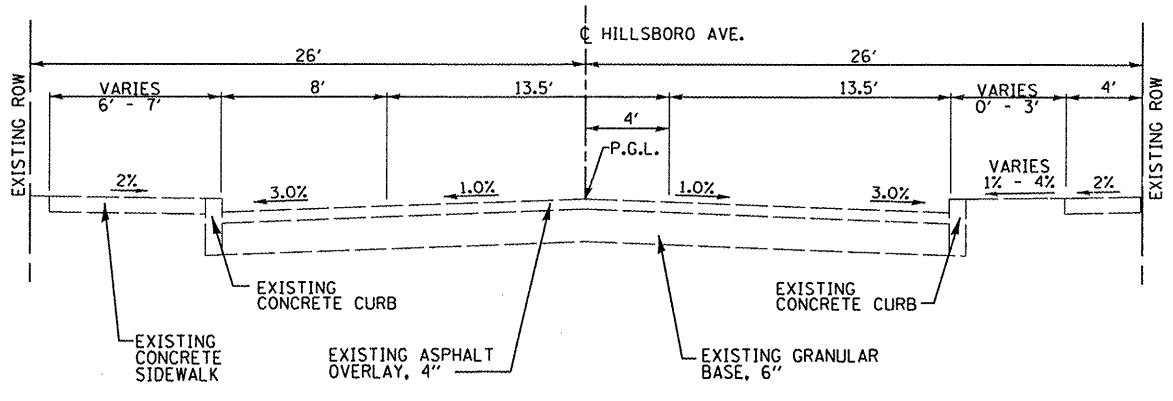

EXISTING TYPICAL SECTION
STA. 14+00 TO STA. 18+00

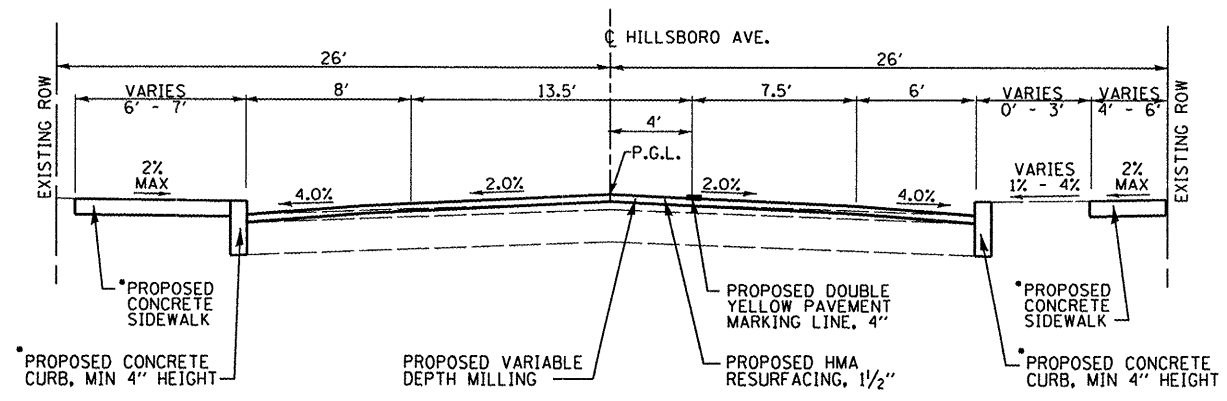

*SEE PLANS FOR SPECIFIC CURB AND SIDEWALK REPLACEMENT LOCATIONS

PROPOSED TYPICAL SECTION
STA. 14+00 TO STA. 18+00

HOT-MIX ASPHALT DESIGN MIX TABLE		
MIXTURE USE	SURFACE COURSE	PAVEMENT PATCHES
THICKNESS	1-1/2"	8"
ACPG	PG 70-22	PG 64-22
RAP % (MAX)	10%	15%
DESIGN AIR VOIDS	4% @ Ndes = 70	4% @ Ndes = 70
MIX COMPOSITION	IL-9.5	IL-19.0
FRICTION AGGREGATE	MIXTURE D	MIXTURE B