## STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

**DIVISION OF HIGHWAYS** 

# **PROPOSED HIGHWAY PLANS**

F.A.P. 326 / US 30 / IL 47

**SECTION: 2009-001 RS** US 30 / IL 56 TO KENDALL COUNTY LINE & RAMPS AT IL 47 **RESURFACING (3P)** 

PROJECT: ESP-0326(079) KANE AND KENDALE COUNTIES C-91-328-09

# SUGAR GROVE TOWNSHIP R. 7 E. **PROJECT ENDS** 4 STA. 231 + 68RAMPS 'A', 'B', 'B-1' 'C', 'D', 'E', 'F', 'F-1' PROJECT BEGINS STA.44 + 40

GROSS LENGTH OF PROJECT = 18.728 FEET = 3.547 MILES NET LENGTH OF PROJECT = 18,728 FEET = 3.547 MILES

CONTRACT NO. 60G12

CHRISTIAN-ROGE & ASSOCIATES, INC. ENGINEERS - PLANNERS - SURVEYORS 211 W. WACKER DRIVE CHICAGO, IL. 60606 TELEPHONE: 312-372-2023

COUNTY 2009-001 RS KANE 37 FED. ROAD DIST. NO. 1 ILLINOIS CONTRACT NO. 60G12

D-91-328-09




STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

Birinder S. Sachdera BIRINDER S. SACHDEVA, P.E.

January 28,2009

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

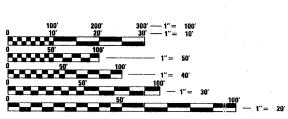

FOR INDEX OF SHEETS, SEE SHEET NO. 2

SPEED LIMIT: 55 M.P.H. TO 45 M.P.H.

**DESIGN DESIGNATION:** 

2007 ADT = 20.900

PROJECT IS LOCATED IN THE

VILLAGE OF SUGAR GROVE

 $\bigcirc$ 

 $\circ$ 

 $\circ$ 

0

ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS 1-800-892-0123 OR 811

DISTRICT ONE - DESIGN PLAN PREP ENGINEER: KEN ENG (847) 705-4247

#### INDEX OF SHEETS

1	COVER SHEET
2	INDEX OF SHEETS, LIST OF STATE STANDARDS AND GENERAL NOTES
3	SUMMARY OF QUANTITIES
4 - 5	TYPICAL SECTIONS
6 - 14	ROADWAY PLAN
15 - 23	PAVEMENT MARKING PLAN
24	DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING
25	PAVEMENT PATCHING FOR HMA SURFACED PAVEMENT
26	CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT
27	BUTT JOINT AND HMA TAPER DETAILS
28	TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS AND DRIVEWAYS
29	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)
30 - 31	MULTI-LANE FREEWAY PAVEMENT MARKING DETAILS
32	DISTRICT ONE TYPICAL PAVEMENT MARKINGS
33	TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC)
34	TRAFFIC CONTROL DETAILS FOR FREEWAY SHOULDER CLOSURES AND PARTIAL RAMP CLOSURE
35	PAVEMENT MARKING LETTERS AND SYMBOLS FOR TRAFFIC STAGING
36	ARTERIAL ROAD INFORMATION SIGN
37	DISTRICT 1 - DETECTOR LOOP INSTALLATION DETAILS FOR ROADWAY RESURFACING

#### LIST OF STATE STANDARDS

	EIST OF STATE STATEMENTS
STANDARD NO.	DESCRIPTION
000001-05	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
442201 - <i>03</i>	CLASS C AND D PATCHES
604001-03	FRAME AND LIDS, TYPE 1
606001- <i>04</i>	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
701201-03	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
701301- <i>03</i>	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701306- <i>02</i>	LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS > 45 MPH
701311- <i>03</i>	LANE CLOSURE, 2L, 2W, MOVING OPERATIONS - DAY ONLY
701336- <i>05</i>	LANE CLOSURE, 2L, 2W, WORK AREAS IN SERIES, FOR SPEEDS > 45 MPH
701421- <i>02</i>	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS > 45 MPH TO 55 MPH
701422 <i>-0</i> Z	LANE CLOSURE, MULTILANE, FOR SPEEDS > 45 MPH TO 55 MPH
701426- <i>03</i>	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION, FOR SPEEDS > 45 MPH
701451	RAMP CLOSURE FREEWAY/EXPRESSWAY
701606-06	URBAN LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
701701 <i>-06</i>	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701901-01	TRAFFIC CONTROL DEVICES
780001-02	TYPICAL PAVEMENT MARKINGS

#### GENERAL NOTES

- 1. BEFORE STARTING ANY EXCAVATION, THE CONTRACTOR SHALL CALL "JULIE" AT (800) 892-0123 OR 811 FOR FIELD LOCATIONS OF BURIED ELECTRIC, TELEPHONE AND GAS FACILITIES. (48 HOUR NOTIFICATION IS REQUIRED)
- 2. 10 FOOT TRANSITIONS SHALL BE USED TO MATCH PROPOSED CURB AND GUTTER ITEMS OF WORK TO EXISTING CURBS AND GUTTERS AND CONDITIONS IN THE FIELD UNLESS OTHERWISE SHOWN. THE TRANSITIONS SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR THE PROPOSED ITEMS OF WORK SPECIFIED.
- 3. THE CONTRACTOR SHALL COORDINATE CONSTRUCTION ACTIVITIES WITH UTILITY COMPANIES.
- 4. WHEN ARTIFICIAL LIGHTING IS USED IN NIGHT OPERATIONS, THE CONTRACTOR SHALL EXERCISE THE UTMOST PRECAUTIONS IN PREVENTING ADVERSE VISIBILITY TO THE MOTORING PUBLIC AND ADJOINING RESIDENTIAL AREAS.
- 5. THE CONTRACTOR WILL NOT BE ALLOWED TO SET UP A YARD OR FIELD OFFICE ON STATE PROPERTY WITHOUT WRITTEN PERMISSION FROM THE DEPARTMENT.
- 6. SAW CUTTING PRIOR TO ANY REMOVAL ITEMS NOTED ON THE PLANS OR DIRECTED BY THE ENGINEER SHALL BE CONSIDERED INCLUDED IN THE COST OF THE ITEMS BEING REMOVED.
- 7. DO NOT SCALE PLANS FOR CONSTRUCTION DIMENSIONS.
- 8. THE CONTRACTOR SHALL USE CARE IN REMOVING OR EXCAVATING NEAR ALL EXISTING ITEMS WHICH WILL REMAIN. ANY DAMAGE DONE TO EXISTING ITEMS BY THE CONTRACTOR SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.
- 9. WHEN MILLED PAVEMENT IS OPEN TO TRAFFIC, THE MAXIMUM GRADE DIFFERENTIAL BETWEEN PASSES OF THE MILLING MACHINE SHALL NOT EXCEED 1 1 / 2 INCHES (40 MM) WHERE THE SPEED LIMIT IS 40 MPH OR LESS AND 1 INCH WHERE THE SPEED LIMIT IS GREATER THAN 45 MPH. WITH WRITTEN APPROVAL FROM THE ENGINEER, A MAXIMUM GRADE DIFFERENTIAL OF 3 INCHES MAY BE ALLOWED IF THE EDGE OF THE MILLING IS SLOPED A MINIMUM 1:3 (V:H).
- 10. UNLESS OTHER CONDITIONS WARRANT EXTENDED LANE CLOSURE AS DETERMINED AND APPROVED IN WRITING BY THE ENGINEER OR AS PROVIDED FOR IN THE CONTRACT SPECIFICATIONS, OVERNIGHT CLOSURES SHALL NOT BE ALLOWED FOR REHABILITATION PROJECTS INVOLVING DAYTIME MILLING AND RESURFACING OPERATIONS AND CLASS D PATCHING. SEE NOTE 18 FOR CLASS B PATCHING.
- 11. PAVEMENT MARKING TAPE, TYPE III SHALL BE USED FOR SHORT TERM PAVEMENT MARKINGS AND TEMPORARY PAVEMENT MARKINGS ON ALL FINAL SURFACES. THE COST OF THE PAVEMENT MARKING TAPE TYPE III SHALL BE INCLUDED IN THE COST OF SHORT TERM PAVEMENT MARKINGS AND TEMPORARY PAVEMENT MARKINGS.
- 12. THE CONTRACTOR SHALL CONTACT THE TRAFFIC CONTROL SUPERVISOR AT (847) 705-4470 A MINIMUM OF 72 HOURS PRIOR TO THE PLACEMENT OF ANY TEMPORARY TRAFFIC CONTROL DEVICES.
- 13. THE CONTRACTOR SHALL CONTACT DON CHIARUGI, THE AREA TRAFFIC FIELD ENGINEER, AT (847) 741-9857 TWO (2) WEEKS PRIOR TO THE PLACEMENT OF PERMANENT PAVEMENT MARKINGS.
- 14. BUTT JOINTS WILL BE INSTALLED AT THE ENDS OF ALL RESURFACING (WHERE RESURFACING MEETS EXISTING PAVEMENT), IN ACCORDANCE WITH THE "BUTT JOINT AND HMA TAPER DETAILS" INCLUDED IN THE PLANS, UNLESS OTHERWISE SPECIFIED.
- 15. MATCH EXISTING PAVEMENT MARKINGS AT THE PROJECT AND OMISSION LIMITS.
- 16. ALL DAMAGE TO EXISTING PAVEMENT MARKINGS OUTSIDE THE REMOVAL LINE SHOWN ON THE PLANS SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.
- 17. PAY ITEM 55039700 STORM SEWERS TO BE CLEANED SHALL ONLY BE UTILIZED TO CLEAN STORM SEWER PIPES BETWEEN INLETS AND CATCH BASINS.



IC.	DESIGNED	-	G.F.L.	REVISED	**
s	DRAWN	-	B.K.	REVISED	
	CHECKED	-	M.P.	REVISED	
5274	DATE	-	FEBRUARY 2009	REVISED	-

INDEX OF SH	EETS, LIST OF STATE STANDARDS AND GENERAL NOTES	F.A.P. RTE.	SECTION
US 30 / II	. 56 TO KENDALL COUNTY LINE & RAMPS AT IL 47	326	2009-001 RS
	T		
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS   STA. 44+40 TO STA. 231+68	FED. RO	DAD DIST. NO. 1   ILLINO

COUNTY

KANE/KENDALL 37 2

CONTRACT NO. 60G12

	S	UMMARY OF QUANTITIES		1001.FED.	CONSTRUCTION TYPE CODE
	CODE NO	ITEM	UNIT	TOTAL QUANTITIES	IOOO URBAN
	40600200	BITUMINOUS MATERIALS (PRIME COAT)	TON	68	68
	40600300	AGGREGATE (PRIME COAT)	TON	387	387
	40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	60	. 60
	40600895	CONSTRUCTING TEST STRIP	EACH	2	2
	40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	701	701
	40601005	HOT-MIX ASPHALT REPLACEMENT OVER PATCHES	TON	174	174
	40603595	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90	TON	9,638	9,638
	42001300	PROTECTIVE COAT	SQ YD	67	67
	44000156	HOT-MIX ASPHALT SURFACE REMOVAL, 1 3/4"	SQ YD	3,200	3,200
	44000159	HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/2"	SQ YD	95,150	95,150
	44001700	COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT	FOOT	200	200
	44002212	HOT-MIX ASPHALT REMOVAL OVER PATCHES, 3"	SQ YD	1,035	1,035
	44201765	CLASS D PATCHES, TYPE II, 10 INCH	SQ YD	360	360
	44201769	CLASS D PATCHES, TYPE III, 10 INCH	SQ YD	375	375
	44201771	CLASS D PATCHES, TYPE IV, 10 INCH	SQ YD	300	300
	44201803	CLASS D PATCHES, TYPE II, 13 INCH	SQ YD	1,560	1,560
	44201807	CLASS D PATCHES, TYPE III,13 INCH	SQ YD	1,250	1,250
	44201809	CLASS D PATCHES, TYPE IV, 13 INCH	SQ YD	1,200	1,200
NP	55039700	STORM SEWERS TO BE CLEANED	FOOT	656	656
	60300305	FRAMES AND LIDS TO BE ADJUSTED	EACH	2	2
	60300310	FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)	EACH	3	3
	67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	6	6
	67100100	MOBILIZATION	L SUM	1	1
	70100310	TRAFFIC CONTROL AND PROTECTION, STANDARD 701421	L SUM	. 1	1
	70100320	TRAFFIC CONTROL AND PROTECTION, STANDARD 701422	L SUM	1	1
	70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1	1
	70100460	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	L SUM	1	1
	70100600	TRAFFIC CONTROL AND PROTECTION, STANDARD 701336	L SUM	1	1
	70102625	TRAFFIC CONTROL AND PROTECTION, STANDARD 701606	L SUM	1	1
	70102635	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701	L SUM	1	1
$\triangle$					

	UMMARY OF QUANTITIES		TOTAL	TYPE CODE
CODE NO	ITEM	QUANTITIES	URBAN	
70300100	SHORT-TERM PAVEMENT MARKING	16,000	16,000	
70300210	TEMPORARY PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	618.8	618.8
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	80,801	80,801
70300240	TEMPORARY PAVEMENT MARKING - LINE 6"	FOOT	2,087	2,087
70300250	TEMPORARY PAVEMENT MARKING - LINE 8"	F00T	5,091	5,091
70300260	TEMPORARY PAVEMENT MARKING - LINE 12"	FOOT	1,795	1,795
70300280	TEMPORARY PAVEMENT MARKING - LINE 24"	FOOT	187	187
70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ FT	1,500	1,500
78000100	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	618.8	618.8
78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	80,801	80,801
78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	2,087	2,087
78000500	THERMOPLASTIC PAVEMENT MARKING - LINE 8"	FOOT	5,091	5,091
78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	1,795	1,795
78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	187	187
78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	1,003	1,003
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	1,003	1,003
88600600	DETECTOR LOOP REPLACEMENT	FOOT	1,072	1,072
X0322256	TEMPORARY INFORMATION SIGNING	SQ FT	52	52
X0656100	DRIVEWAY PAVEMENT REMOVAL AND REPLACEMENT	SQ YD	15	15
X4067107	POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50	TON	3,996	3,996
X7011015	TRAFFIC CONTROL AND PROTECTION, (EXPRESSWAYS)	L SUM	1	1
Z0018500	DRAINAGE STRUCTURES TO BE CLEANED	EACH	41	41
		/		
. *				

NP = Non-participating
\* SPECIALTY ITEM


FILE NAME = D16ØG12-sht-SOQ.dgn PLOT DATE = 2/5/2009


CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINOIS 66666
PHONE: (312)372-2023 FAX: (312)372-5274


DESIGNED	-	G.F.L.	REVISED -
DRAWN	-	B.K.	REVISED -
CHECKED	-	M.P.	REVISED -
DATE	-	FEBRUARY 2009	REVISED -


	QUANTITIES	
US 30 / II	. 56 TO KENDALL COUN	NTY LINE & RAMPS AT IL 47
SCALE: NONE	SHEET NO. 1 OF 1 SHEET	TS STA. 44+40 TO STA. 231+68

F.A.P. RTE.		SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	326	2009-001 RS	KANE/KENDALL	37	3	
			CONTRACT	NO. 6	0G12	
	FED. R	DAD DIST. NO. 1 ILLINOIS FED. A	ID PROJECT			

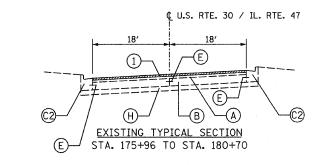


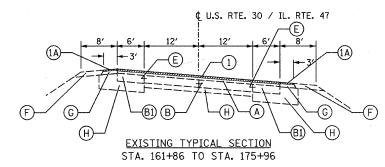


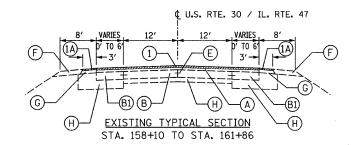

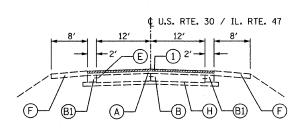


EXISTING TYPICAL SECTION STA. 77+00 TO STA. 141+00 STA. 151+90 TO STYA. 158+10

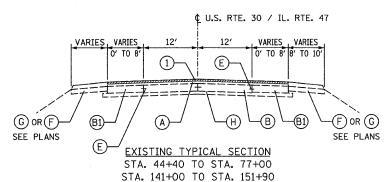


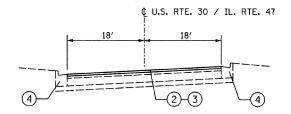


PROPOSED TYPICAL SECTION STA. 175+96 TO STA. 180+70

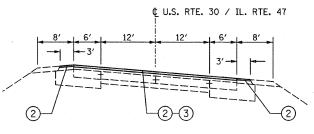


PROPOSED TYPICAL SECTION STA. 161+86 TO STA. 175+96

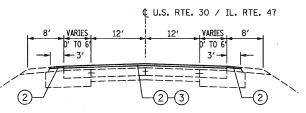

PROPOSED TYPICAL SECTION STA. 158+10 TO STA. 161+86

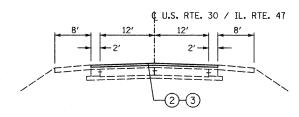

PROPOSED TYPICAL SECTION STA. 77+00 TO STA. 141+00 STA. 151+90 TO STYA. 158+10

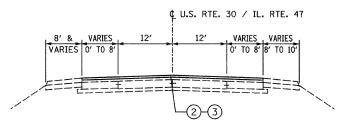

PROPOSED TYPICAL SECTION STA. 44+40 TO STA. 77+00 STA. 141+00 TO STA. 151+90

#### EXISTING CONDITIONS:

- A HOT-MIX ASPHALT SURFACE AND BINDER COURSE, 51/2" & VARIES
- (A1) HOT-MIX ASPHALT SURFACE AND BINDER COURSE, 3" & VARIES
- B P.C.C. PAVEMENT, 10" (WITH PAVEMENT FABRIC)
- (B1) P.C.C. BASE COURSE, 9"
- B2 HMA PAVEMENT (FULL DEPTH, 141/2")
- C COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
- C1) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24
- (2) COMBINATION CONCRETE CURB AND GUTTER, TYPE M-2.12
- D CONCRETE MEDIAN, TYPE SM-2.12 OR TYPE SB 6.12
- (D1) CONCRETE MEDIAN SURFACE
- (D2) HMA MEDIAN SURFACE
- E TIE BARS
- F AGGREGATE SHOULDER
- (G) HMA SHOULDER
- H AGGREGATE SUBGRADE (4", 6", 12" & VARIES)

#### PROPOSED IMPROVEMENTS:

- 1 HOT-MIX ASPHALT SURFACE REMOVAL, 21/2"
- (1A) HOT-MIX ASPHALT SURFACE REMOVAL, 13/4"
- 2 POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 13/4"
- (3) POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- 4 COMB. CONC. CURB AND GUTTER REMOVAL AND REPLACEMENT (AT LOCATIONS DETERMINED BY THE ENGINEER)

- 1. THE CONTRACTOR SHALL MILL MAINLINE PAVEMENT BEFORE PATCHING.
- 2. THE CONTRACTOR SHALL PATCH THE EXIT AND ENTRANCE RAMPS FIRST BEFORE MILLING.

ROADWAY NAME	HOT-MIX ASPHALT MIXTURE REQUIREMENTS											
ROADWAT NAME	MIXTURE TYPE	AC TYPE	AIR VOIDS									
	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90 (IL-9.5mm)	SBS/SBR PG 70-22	4% <b>©</b> 90 GYR									
U.S. 30 / IL. RTE. 56	POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50	SBS/SBR PG 76-28/22	4% <b>©</b> 50 GYR									
	CLASS D PATCHES (HMA BINDER, IL-19)	* PG 64-22	4% <b>©</b> 70 GYR.									
,	HMA REPLACEMENT OVER PATCHES AND PARTIAL DEPTH PATCHING (HMA BINDER, IL-19)	* PG 64-22	4% <b>c</b> 70 GYR.									

\* WHEN RAMP EXCEEDS 20%

PLOT DATE = 2/5/2009





CHRISTIAN-ROGE & ASSOCIATES, INC. DESIGNED - G.F.L. DRAWN REVISED CHECKED - M.P. REVISED PHONE: (312)372-2023 FAX: (312)372-5274 DATE - FEBRUARY 2009 REVISED

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 


TYPICAL SECTIONS US 30 / IL 56 TO KENDALL COUNTY LINE & RAMPS AT IL 47 SCALE: NONE SHEET NO. 1 OF 2 SHEETS


COUNTY TOTAL SHEET NO. KANE/KENDALL 37 4 SECTION RTE. 326 2009-001 RS CONTRACT NO. 60G12

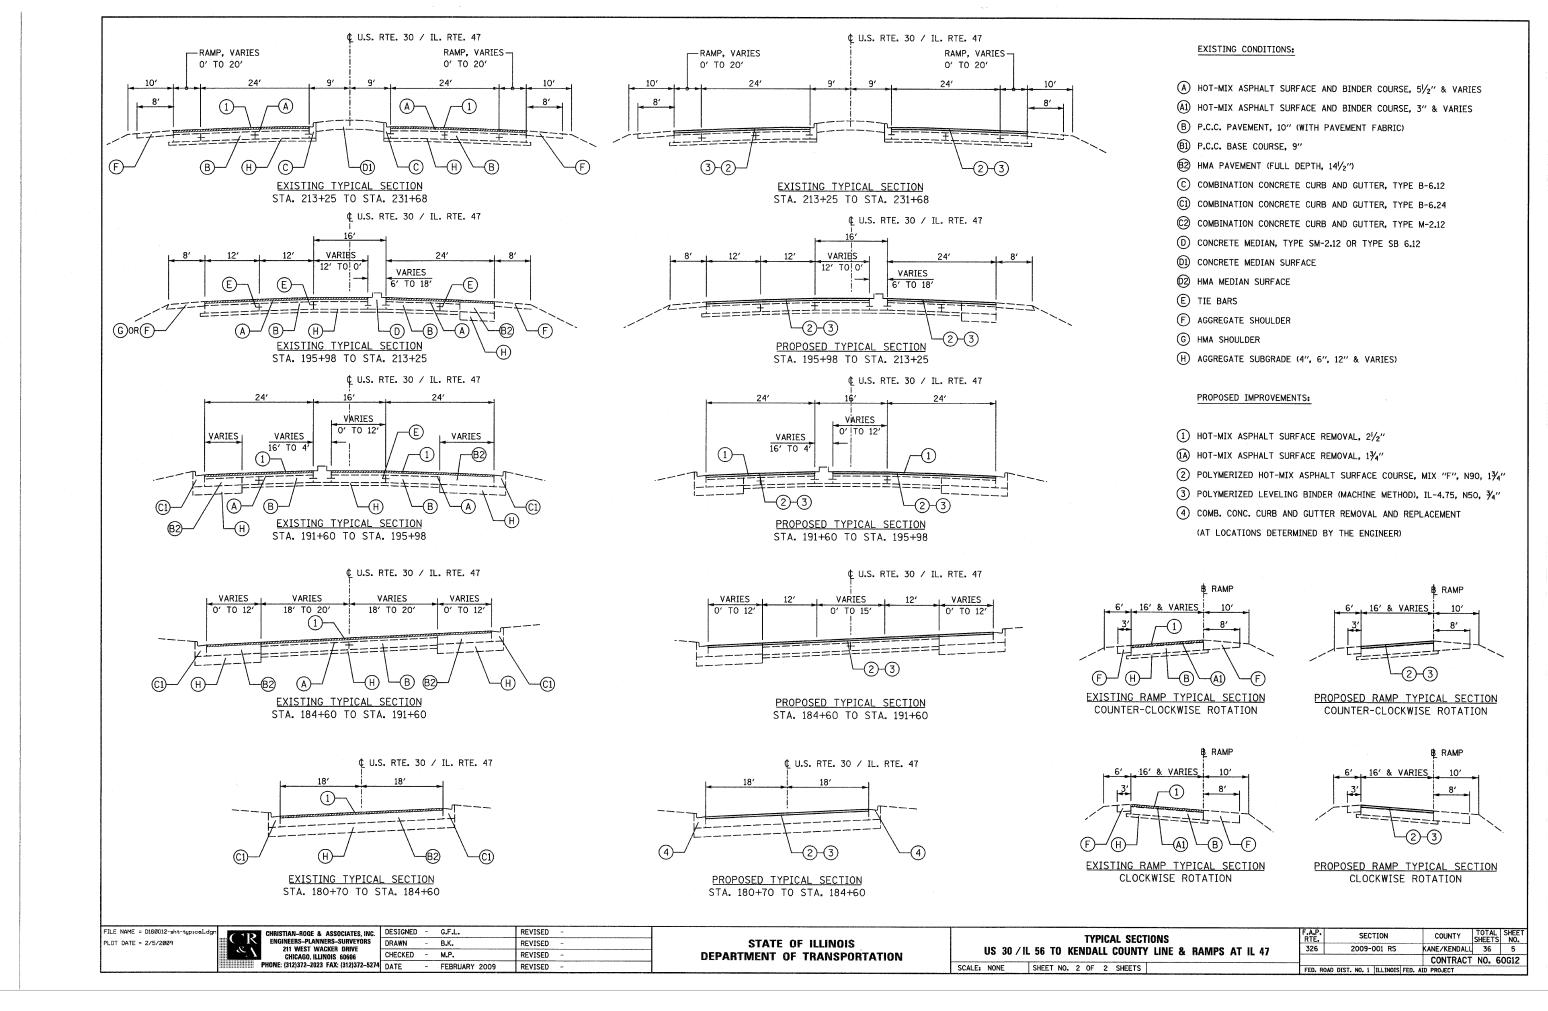

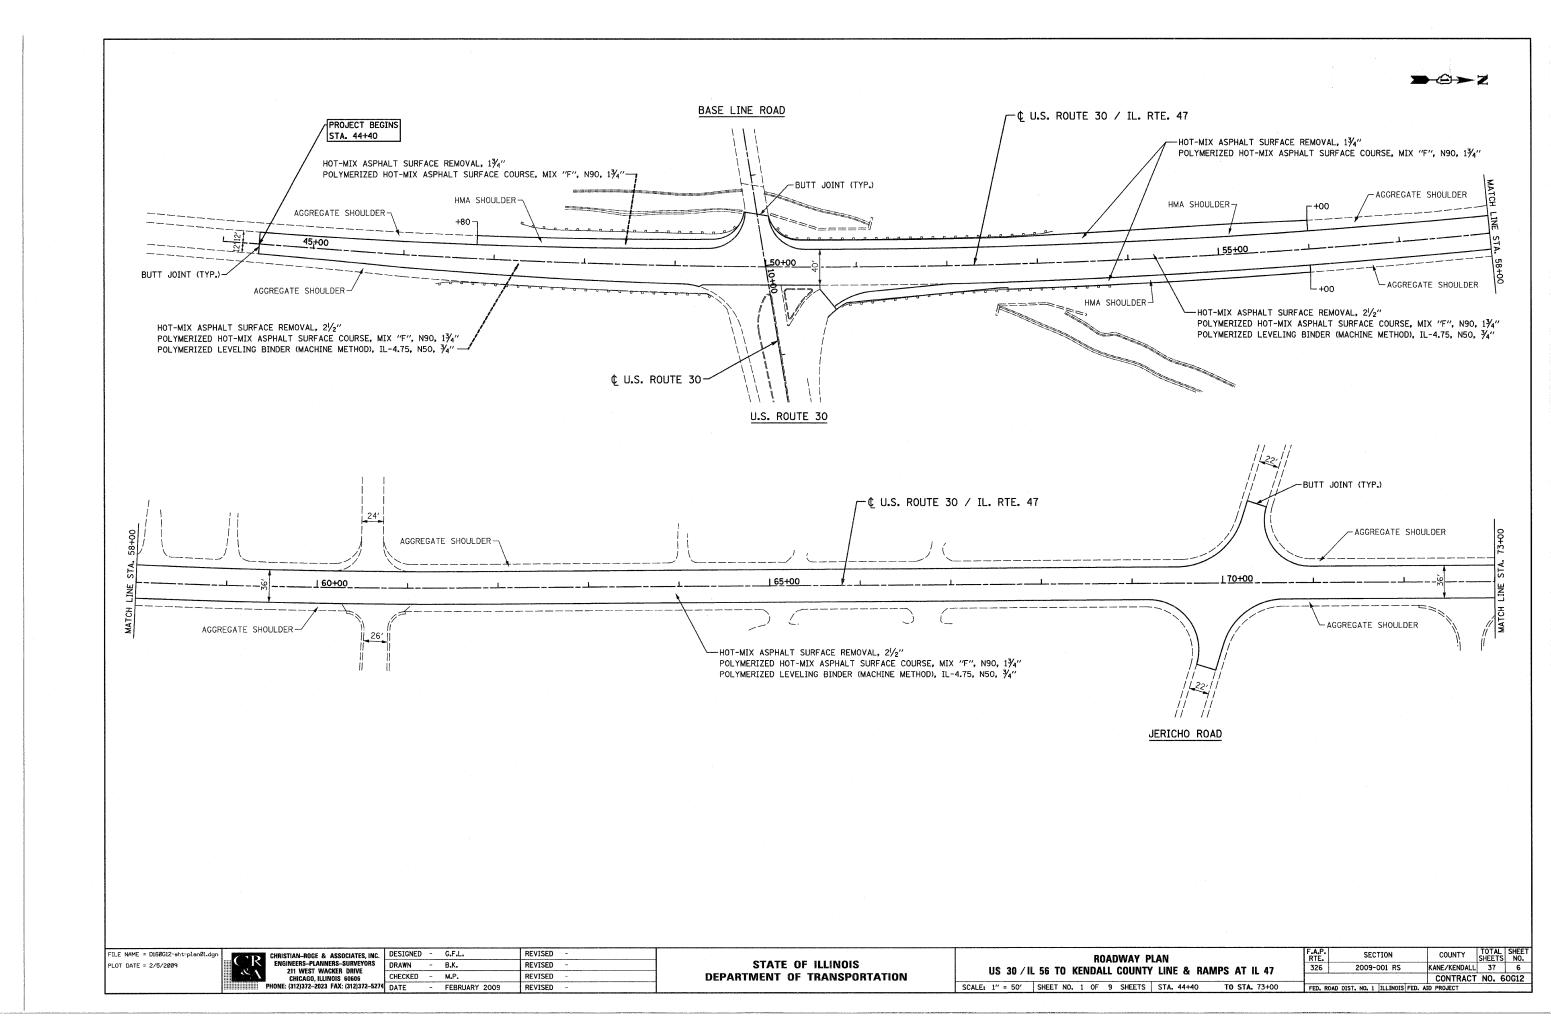



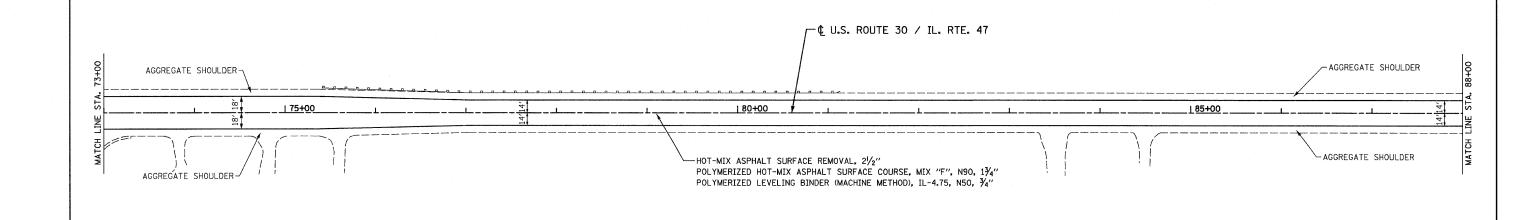

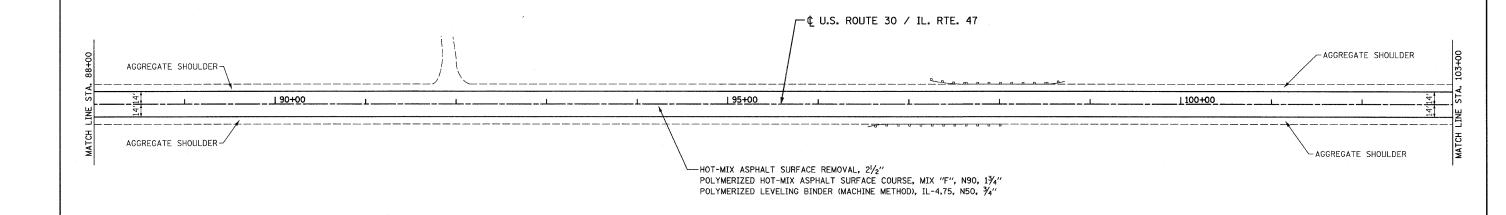

FILE NAME = D16ØG12-sht-planØ2.dg PLOT DATE = 2/5/2009

| CHRISTIAN-ROGE & ASSOCIATES, INC. | DESIGNED | - G.F.L. | REVISED | - DRAWN | - B.K. | REVISED | - DRAWN | - B.K. | REVISED | - CHECKED | - CHECKED


STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 


**ROADWAY PLAN** US 30 / IL 56 TO KENDALL COUNTY LINE & RAMPS AT IL 47 SCALE: 1" = 50' SHEET NO. 2 OF 9 SHEETS STA. 73+00 TO STA. 103+00

F.A.P. RTE. 326 COUNTY TOTAL SHEET NO. KANE/KENDALL 37 7 SECTION 2009-001 RS CONTRACT NO. 60G12

FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT



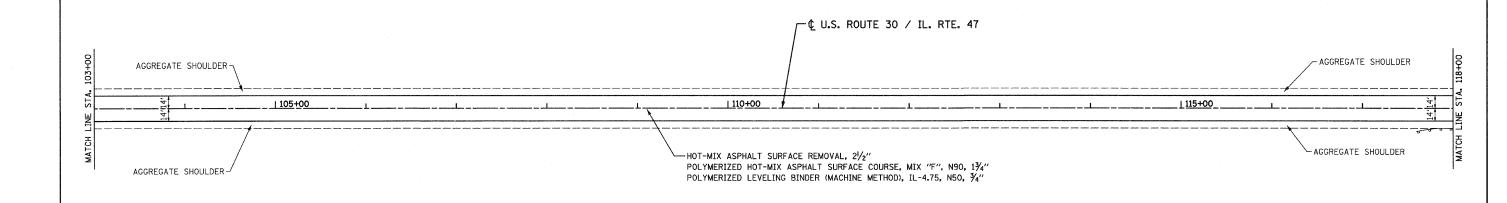

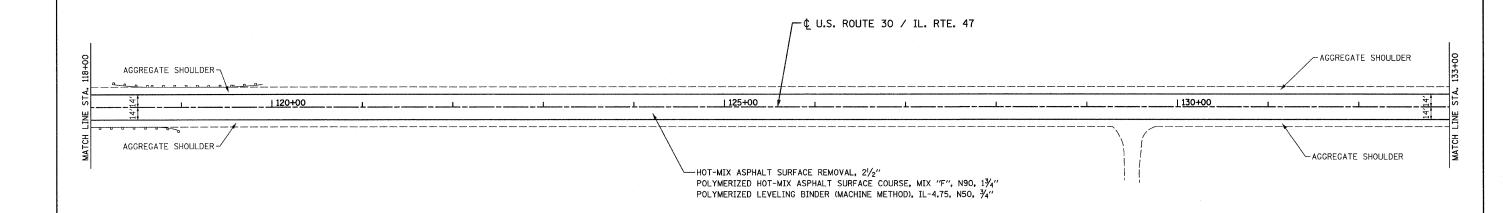



FILE NAME = D16ØG12-sht-planØ3.dgm PLOT DATE = 2/5/2009


REVISED -REVISED -REVISED -- FEBRUARY 2009 REVISED


	ROADWAY PLAN															
	US	30	/ IL	. 56	TO	KEN	IDAI	LL	COUNTY	LINE	&	RAMI	PS	ΑT	IL	47
SCALE	1"	= 50	,	SHEE	T NO	. 3	OF	9	SHEETS	STA.	103+	00	TO	STA	. 13	3+00

A.P. TE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
26	2009-001 RS	KANE/KENDALL	37	8
		CONTRACT	NO. 6	0G12

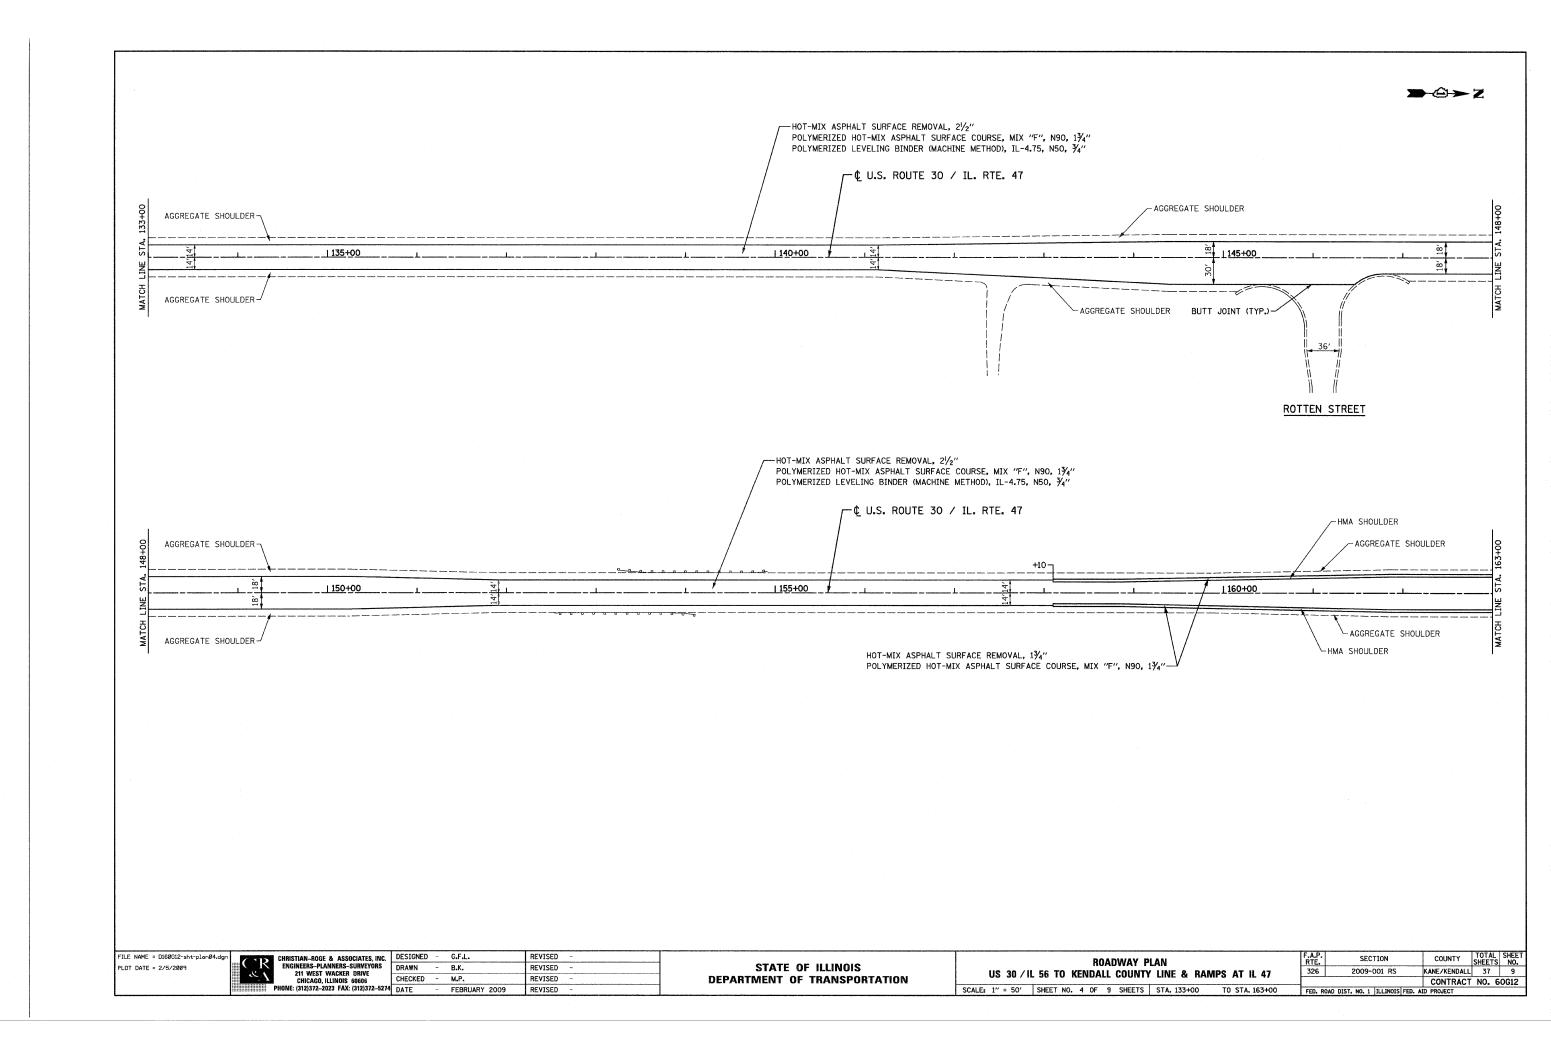

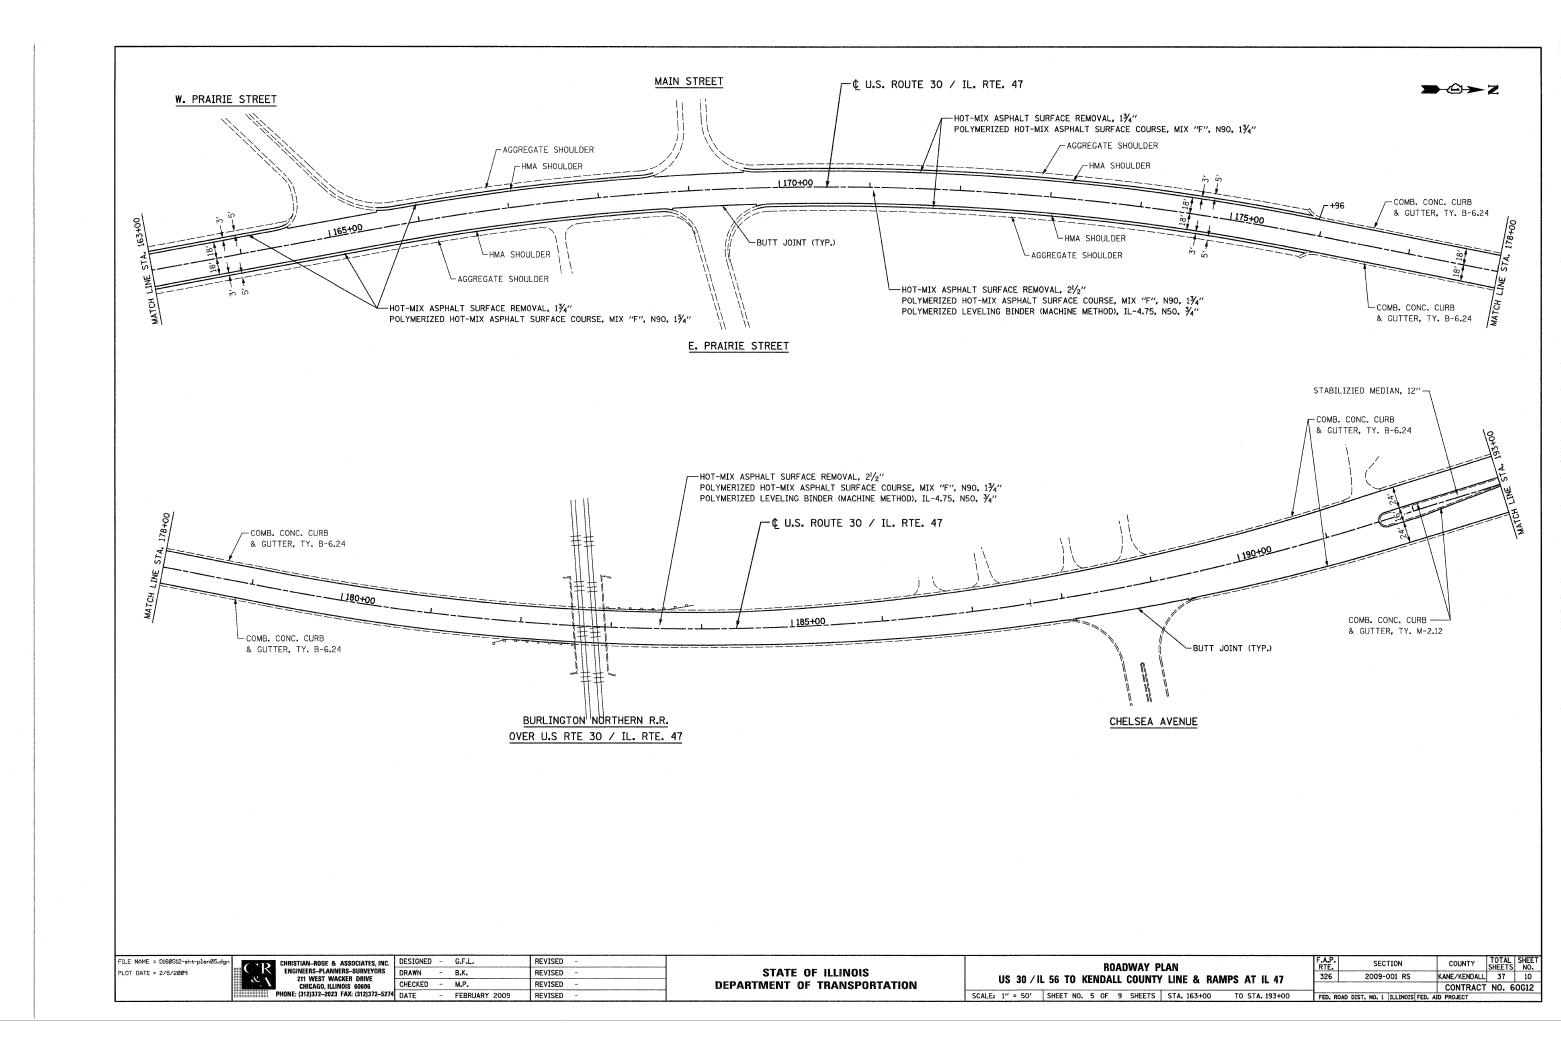

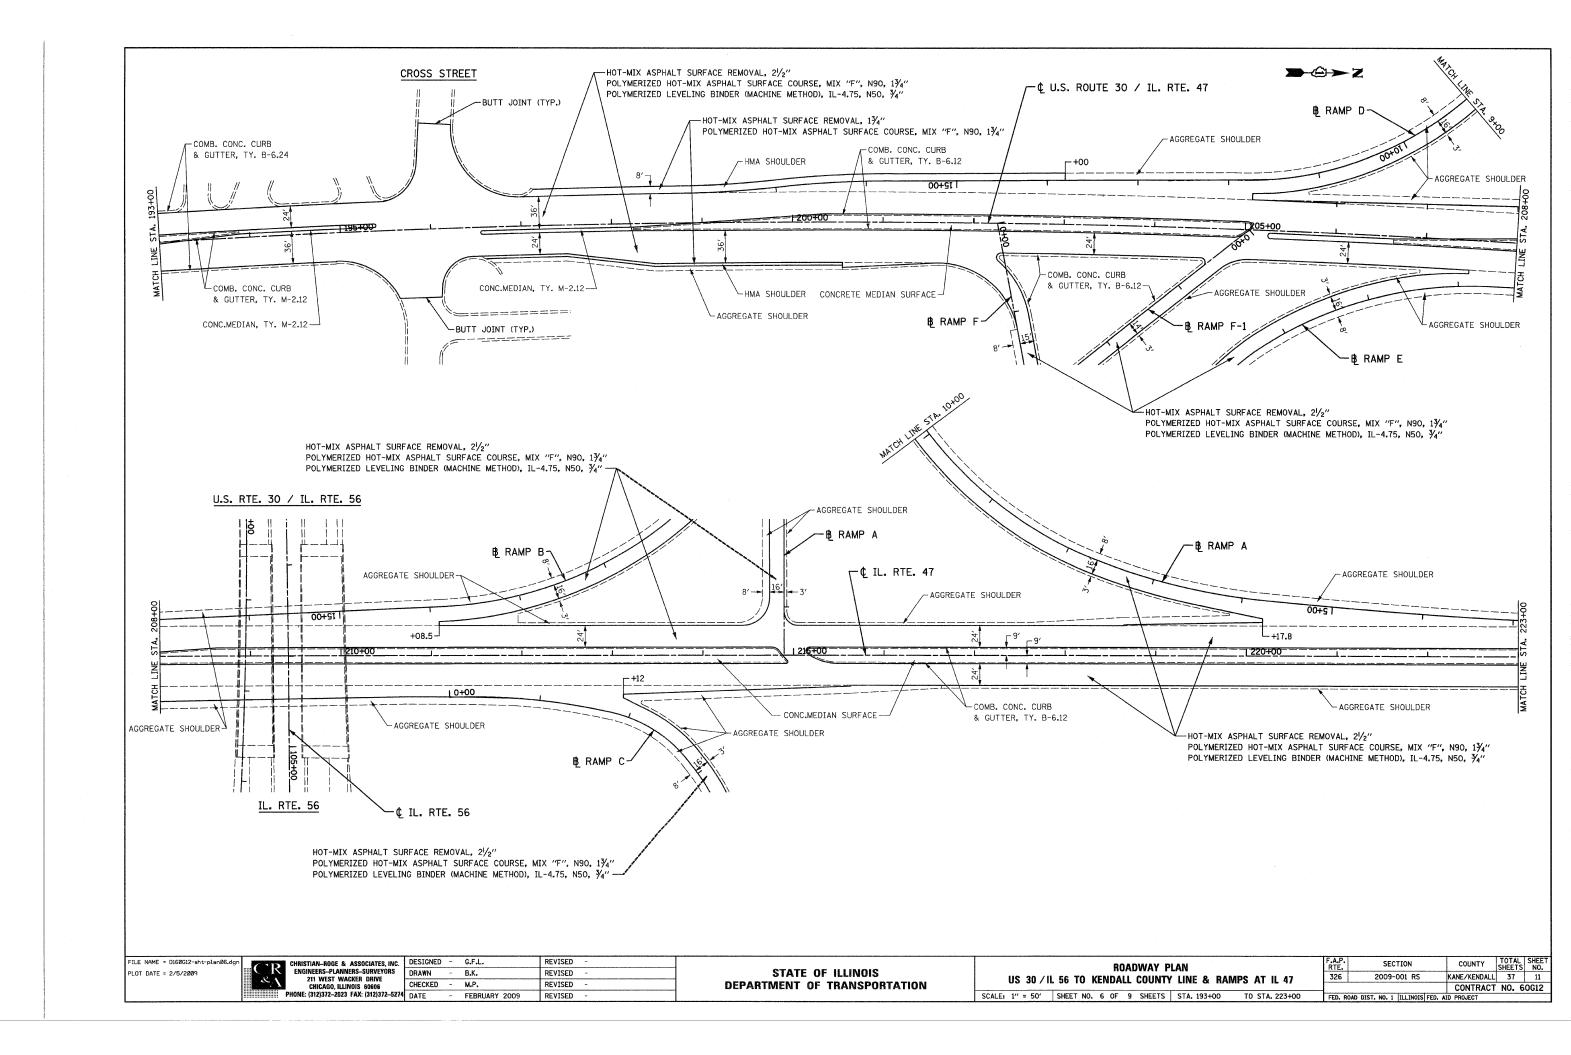

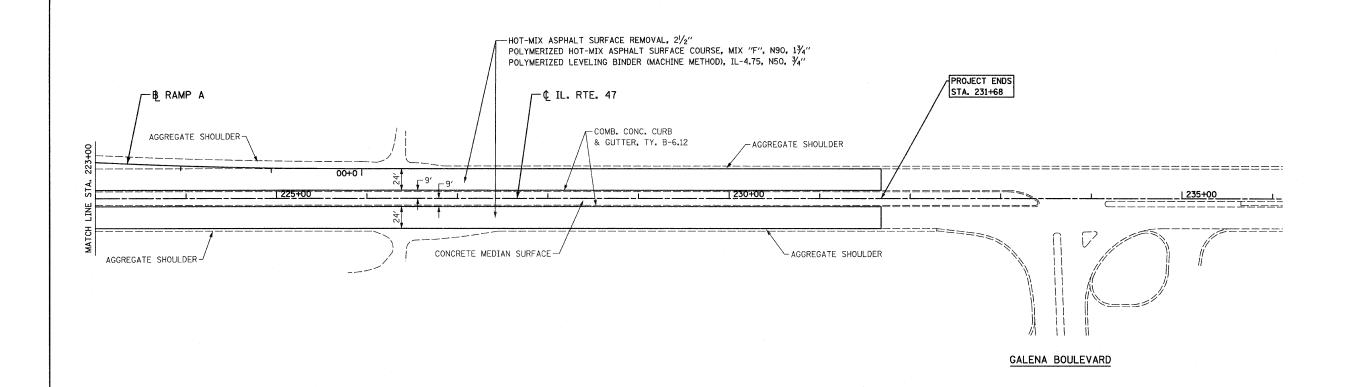


FILE NAME = D160G12~sht~plan07.dgn PLOT DATE = 2/5/2009


CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINOIS 60060
PHONE: (312)372-2023 FAX: (312)372-5274
DATE


DESIGNED - G.F.L. REVISED DRAWN - B.K. REVISED CHECKED - M.P. REVISED -REVISED


STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION


-	ROADWAY PLAN	F.A. RTE		COUNTY	TOTAL SHEETS	SHEE NO.
1	US 30 / IL 56 TO KENDALL COUNTY LINE & RAMPS AT I	1 47 32	5 2009-001 RS	KANE/KENDALL	37	12
ı				CONTRACT	NO. 6	0G12
l	SCALE: 1" = 50' SHEET NO. 7 OF 9 SHEETS STA. 223+00 TO STA.	231+68 FED	ROAD DIST. NO. 1 ILLINOIS FED. A	ID PROJECT		

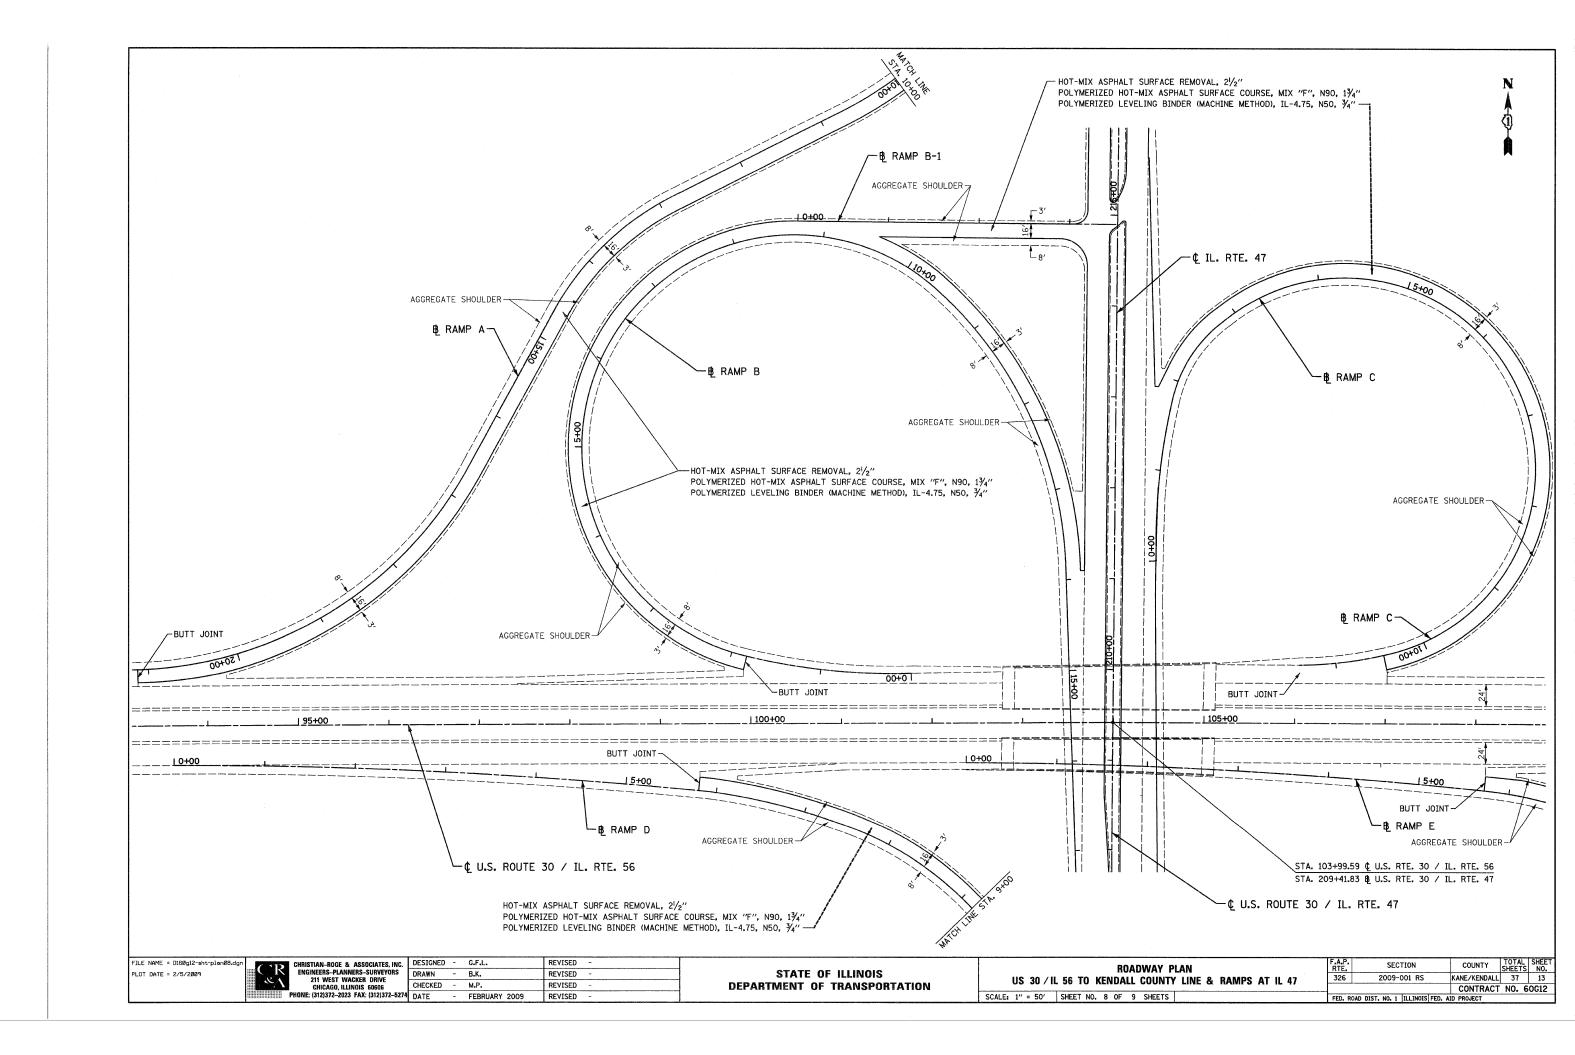

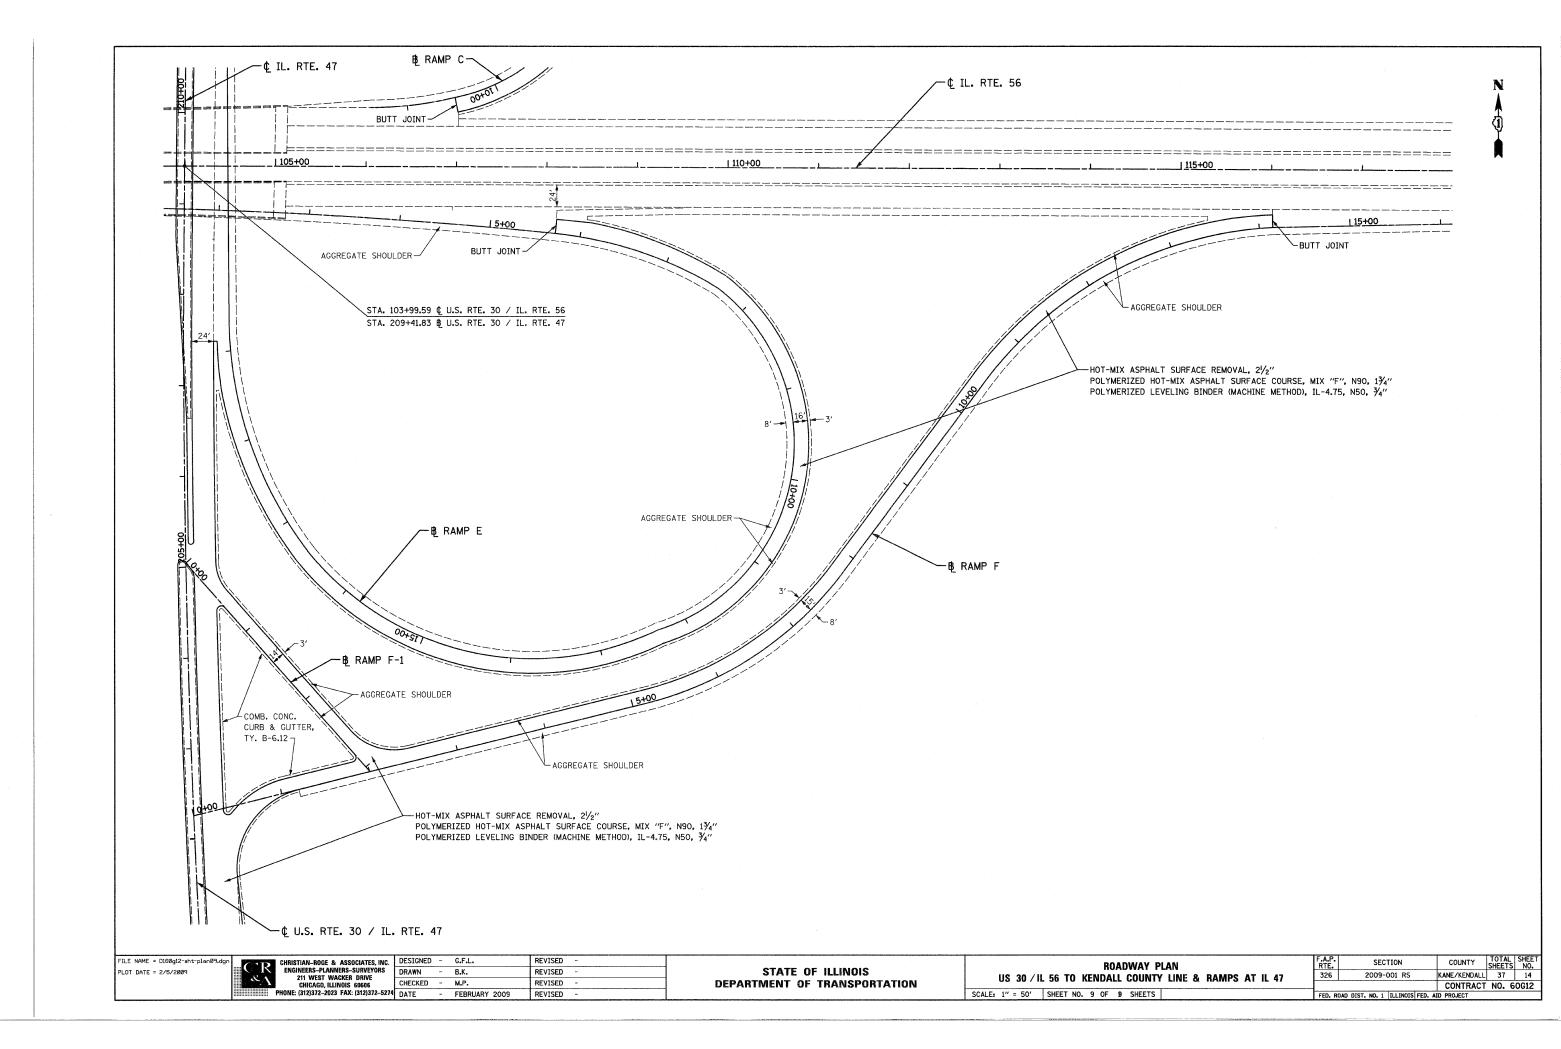

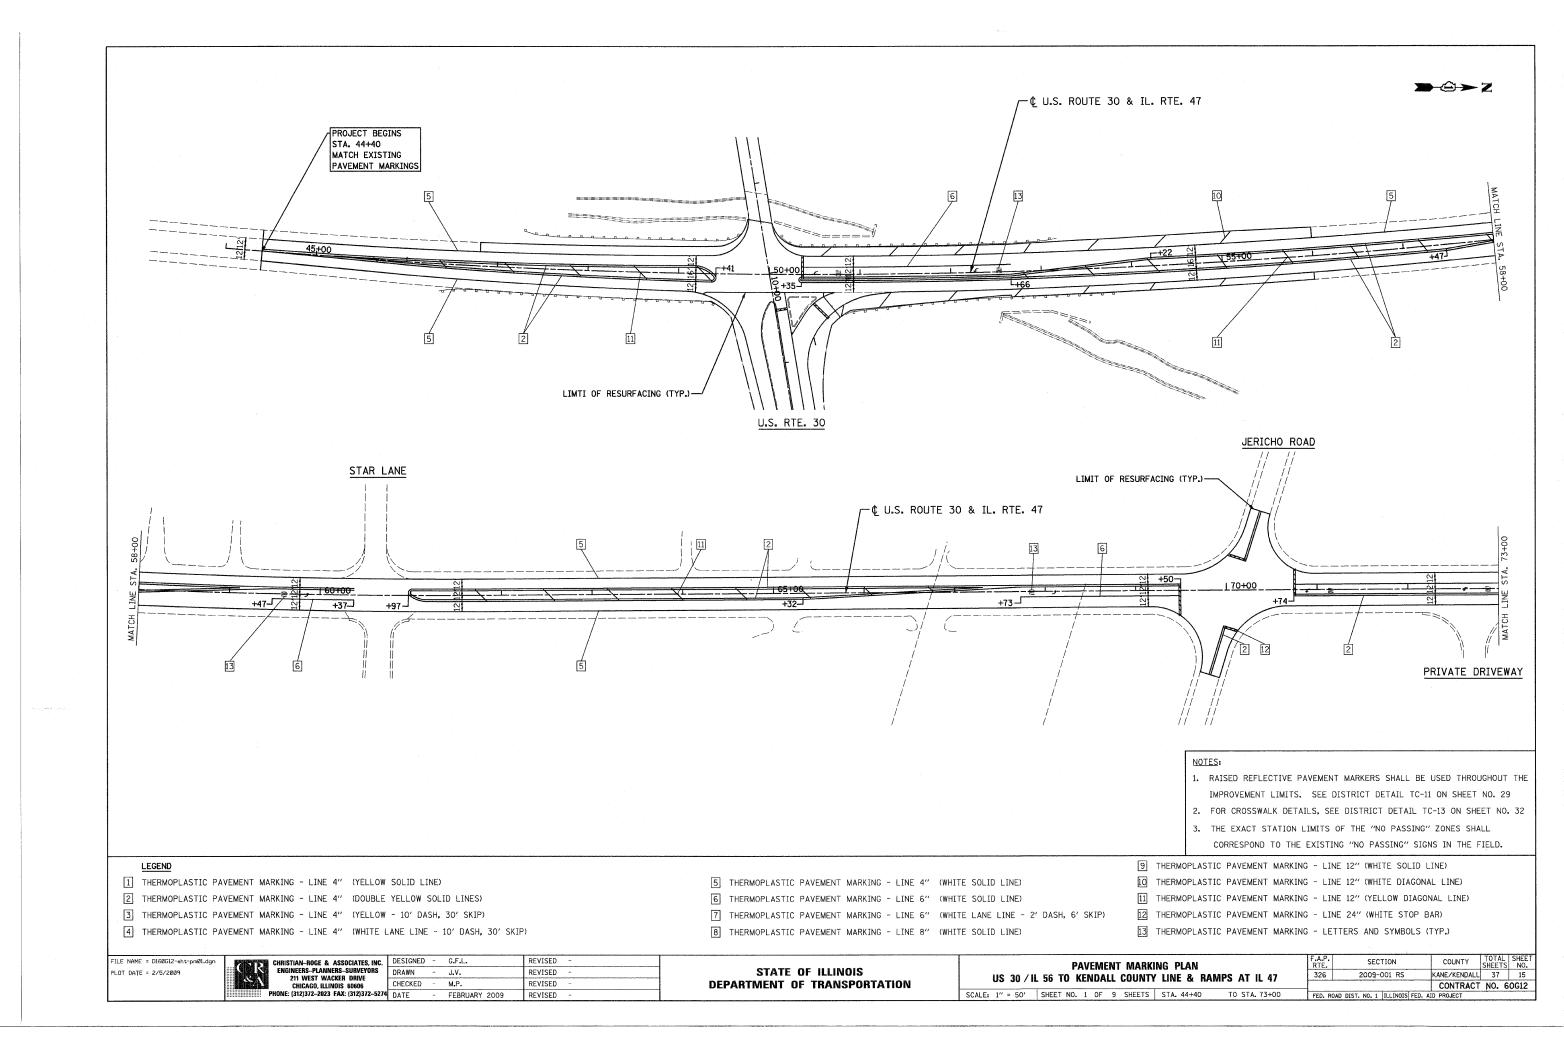

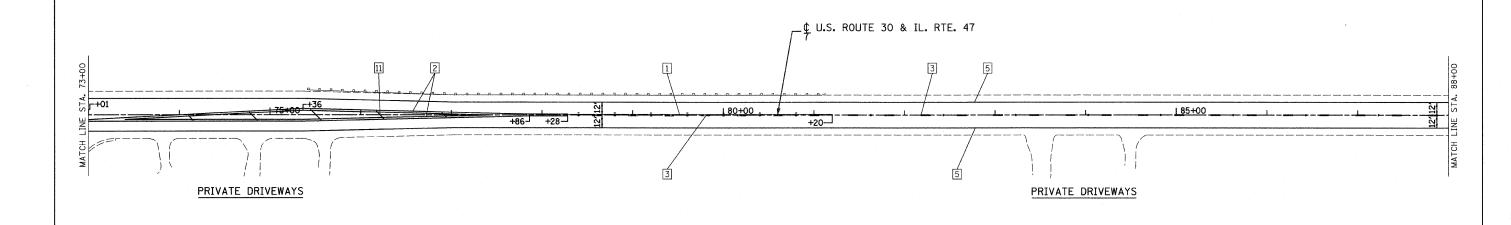

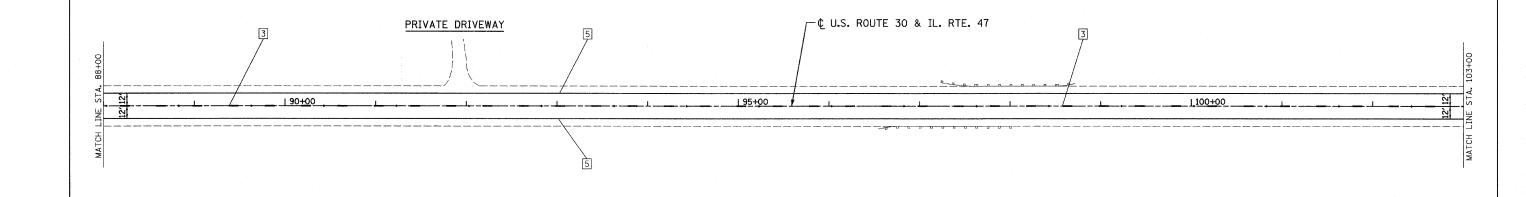

#### NOTES:

- RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11 ON SHEET NO. 29
- 2. FOR CROSSWALK DETAILS, SEE DISTRICT DETAIL TC-13 ON SHEET NO. 32
- 3. THE EXACT STATION LIMITS OF THE "NO PASSING" ZONES SHALL CORRESPOND TO THE EXISTING "NO PASSING" SIGNS IN THE FIELD.

#### LEGEN

- 1 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW SOLID LINE)
- 2 THERMOPLASTIC PAVEMENT MARKING LINE 4" (DOUBLE YELLOW SOLID LINES)
- 3 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW 10' DASH, 30' SKIP)
- 4 THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE LANE LINE 10' DASH, 30' SKIP)

- 5 THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE SOLID LINE)
- 6 THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE SOLID LINE)
- 7 THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE LANE LINE 2' DASH, 6' SKIP)
- 8 THERMOPLASTIC PAVEMENT MARKING LINE 8" (WHITE SOLID LINE)

- 9 THERMOPLASTIC PAVEMENT MARKING LINE 12" (WHITE SOLID LINE)
- THERMOPLASTIC PAVEMENT MARKING LINE 12" (WHITE DIAGONAL LINE)
- 11 THERMOPLASTIC PAVEMENT MARKING LINE 12" (YELLOW DIAGONAL LINE)
- 12 THERMOPLASTIC PAVEMENT MARKING LINE 24" (WHITE STOP BAR)
- THERMOPLASTIC PAVEMENT MARKING LETTERS AND SYMBOLS (TYP.)

FILE NAME = D160G12-sht-pm02.dgn PLOT DATE = 2/5/2009 CHRISTIAN-ROGE & ASSOCIATES, INC
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINIS 60606
PHONE: (312)372-2023 FAX: (312)372-52


TES, INC.	DESIGNED	-	G.F.L.	REVISED	-
/EYORS Ve	DRAWN	-	J.V.	REVISED	~
VE )6	CHECKED	-	M.P.	REVISED	-
)372–5274	DATE	-	FEBRUARY 2009	REVISED	

STATE	OF	ILLINOIS	
DEPARTMENT	0F	TRANSPORTATION	

				- 1	PAV	EMEN	IT	MARKII	NG P	LAN	l				
	US	30 / IL	56	TO	KEN	IDAL	L	COUNTY	LINE	8.	RAMPS	ΑT	IL	47	
_							_								_

F.A.P. RTE.	Γ		SE	СТ	ION			СО	UNTY		TOTA	L rs	SHEET NO.
326		2	009	-0	01 RS		K	ANE/	KENDA	LL	37		16
							Т	COL	NTRA	СТ	NO.	6	OG12
FED. R	OAD	DIST.	NO.	1	ILLINOIS	FED.	AID	PRO.	ECT				



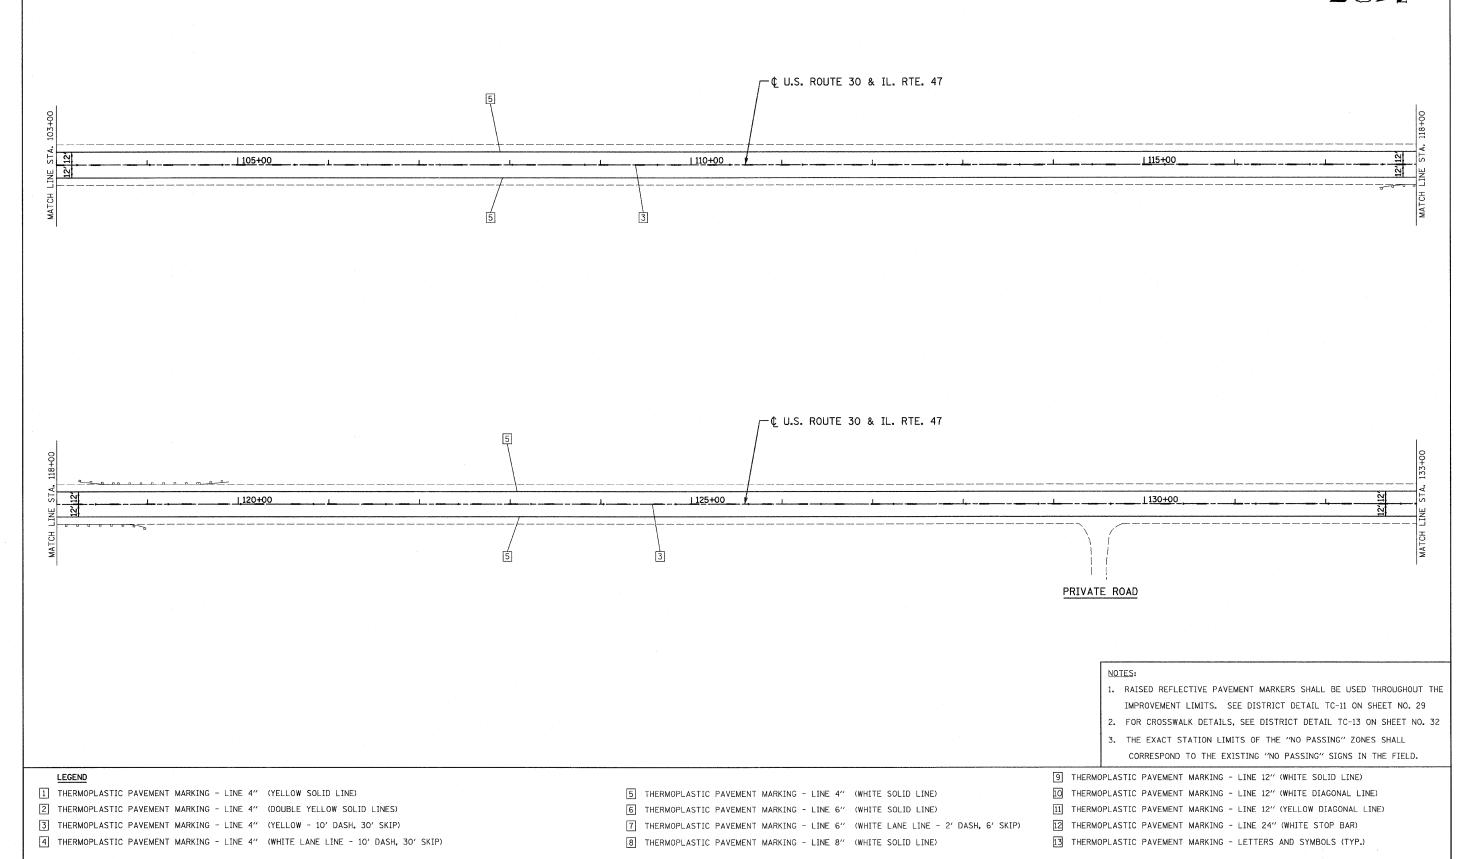

FILE NAME = D160612-sht-pm03.dgn PLOT DATE = 2/5/2009

CHRISTIAN-ROGE & ASSOCIATES, INC.

ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINOIS 60606

PHONE: (312)372-2023 FAX: (312)372-5274

DATE


DESIGNE
DRAWN
CHECKEI
DRAWN
CHECKEI
DATE


| DESIGNED - G.F.L. REVISED - | DRAWN - J.V. REVISED - | CHECKED - | M.P. REVISED - | | DRAWN - J.V. REVISED - | | CHECKED - | M.P. REVISED - | | CHECKED - | | | CHECKED - | | | CHECKED - | | CHECKED - | | CHECKED - | | CHECKED - | | CHECKE

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
US 30 / IL 56 TO KENDALL COUNTY LINE & RAMPS AT IL 47

SCALE: 1" = 50" SHEET NO. 3 OF 9 SHEETS STA. 103+00 TO STA. 133+00

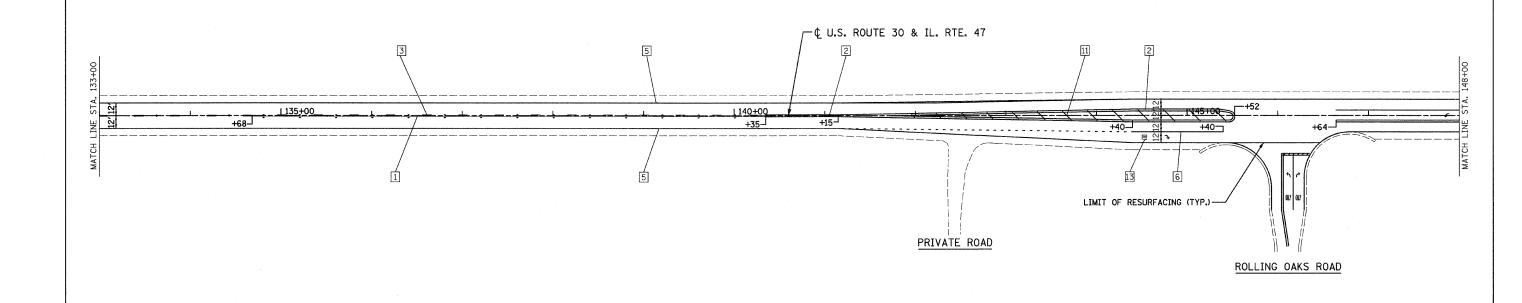

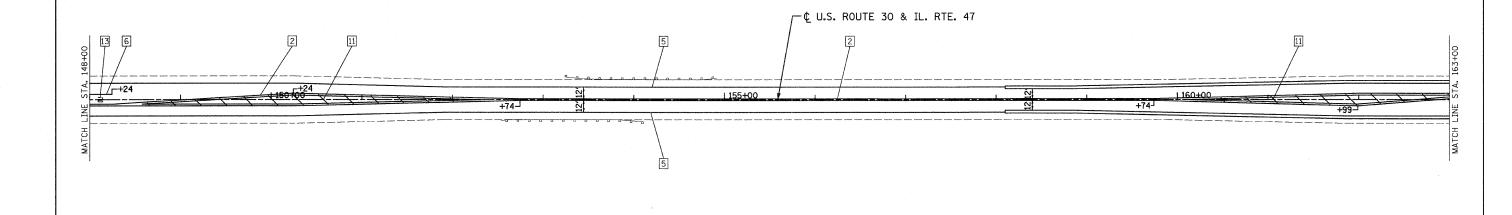

- 1. RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11 ON SHEET NO. 29
- 2. FOR CROSSWALK DETAILS, SEE DISTRICT DETAIL TC-13 ON SHEET NO. 32
- 3. THE EXACT STATION LIMITS OF THE "NO PASSING" ZONES SHALL CORRESPOND TO THE EXISTING "NO PASSING" SIGNS IN THE FIELD.

- 1 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW SOLID LINE)
- 2 THERMOPLASTIC PAVEMENT MARKING LINE 4" (DOUBLE YELLOW SOLID LINES)
- 3 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW 10' DASH, 30' SKIP)
- 4 THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE LANE LINE 10' DASH, 30' SKIP)

- 5 THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE SOLID LINE)
- 6 THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE SOLID LINE)
- THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE LANE LINE 2' DASH, 6' SKIP)
- 8 THERMOPLASTIC PAVEMENT MARKING LINE 8" (WHITE SOLID LINE)

- 9 THERMOPLASTIC PAVEMENT MARKING LINE 12" (WHITE SOLID LINE)
- THERMOPLASTIC PAVEMENT MARKING LINE 12" (WHITE DIAGONAL LINE)
- 11 THERMOPLASTIC PAVEMENT MARKING LINE 12" (YELLOW DIAGONAL LINE)
- 12 THERMOPLASTIC PAVEMENT MARKING LINE 24" (WHITE STOP BAR)
- 13 THERMOPLASTIC PAVEMENT MARKING LETTERS AND SYMBOLS (TYP.)

FILE NAME = D160G12-sht-pm04.dgn


PLOT DATE = 2/5/2009


CHRISTIAN-ROGE & ASSOCIATES, INC. ENGINEERS-PLANNERS-SURVEYORS 211 WEST WACKER DRIVE CHICAGO, ILLINOIS 60606 PHONE: (312)372-2023 FAX: (312)372-5274


Ç	DESIGNED	-	G.F.L.	REVISED	-
	DRAWN	-	J.V.	REVISED	-
	CHECKED	-	M.P.	REVISED	
274	DATE	-	FEBRUARY 2009	REVISED	

	PAVEMENT	r marking plan	
US 30 / IL	. 56 TO KENDALL	COUNTY LINE & RAM	IPS AT IL 47
SCALE: 1" = 50'	SHEET NO. 4 OF 9	SHEETS STA. 133+00	TO STA. 163+00

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHE
326	2009-001 RS	KANE/KENDALL	37	18
		CONTRACT	NO. 6	OG12
FFD. R	DAD DIST, NO. 1 TILLINOIS FED. AT	D PROJECT		

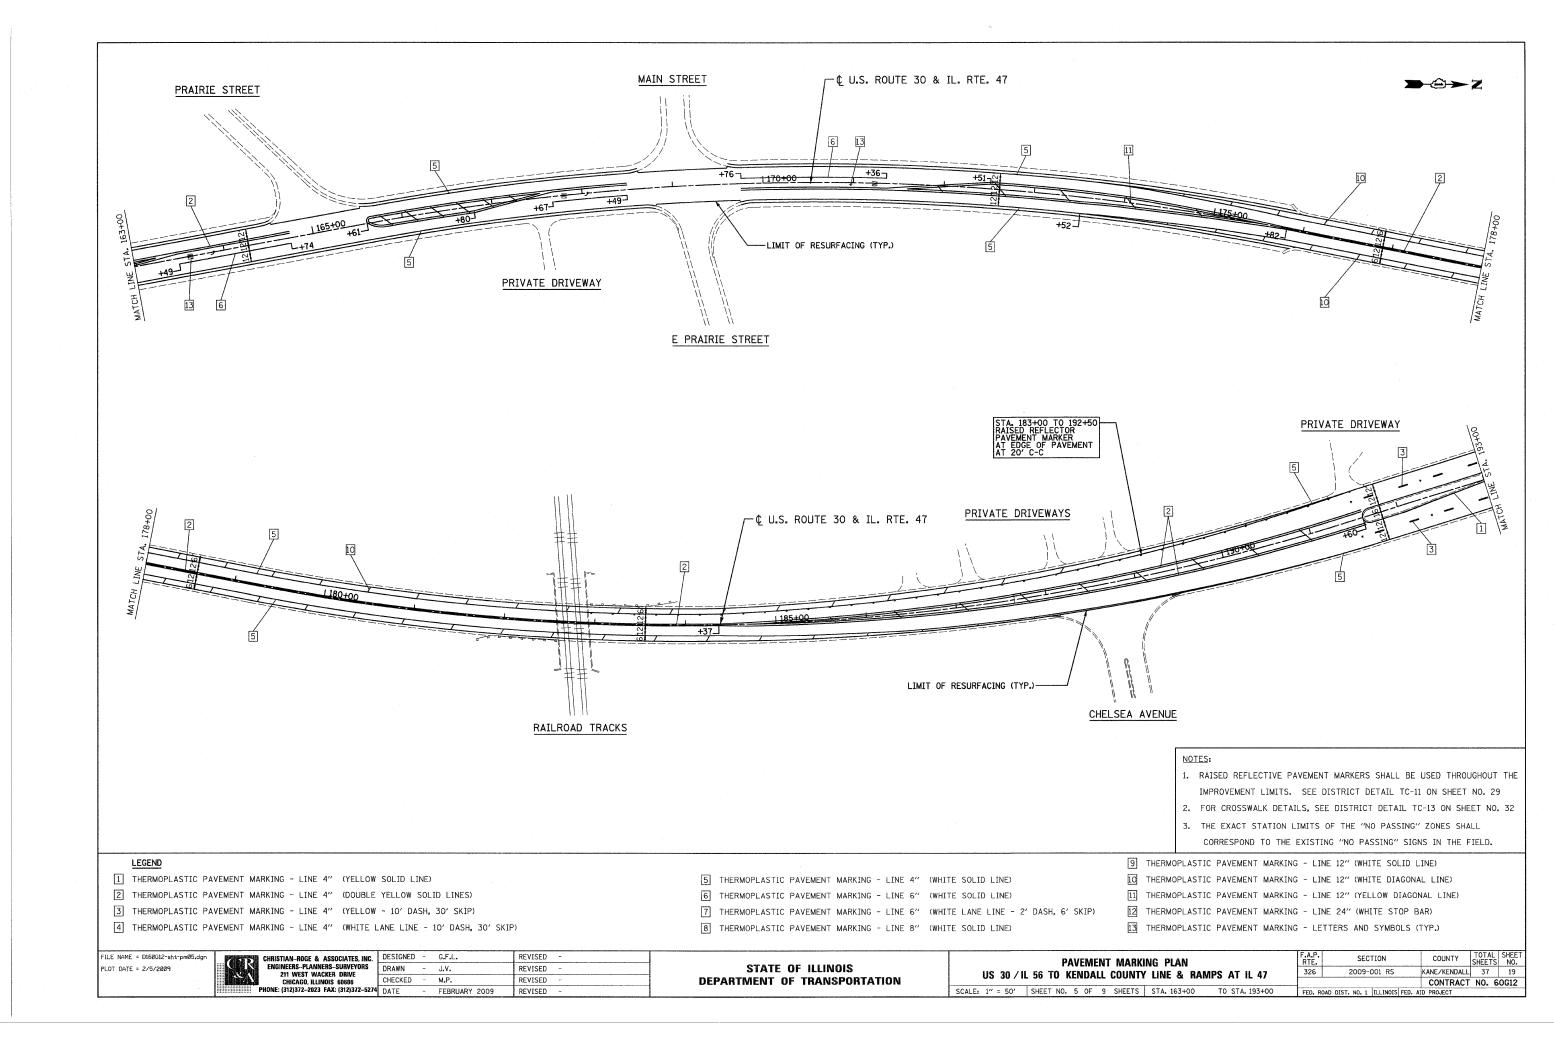

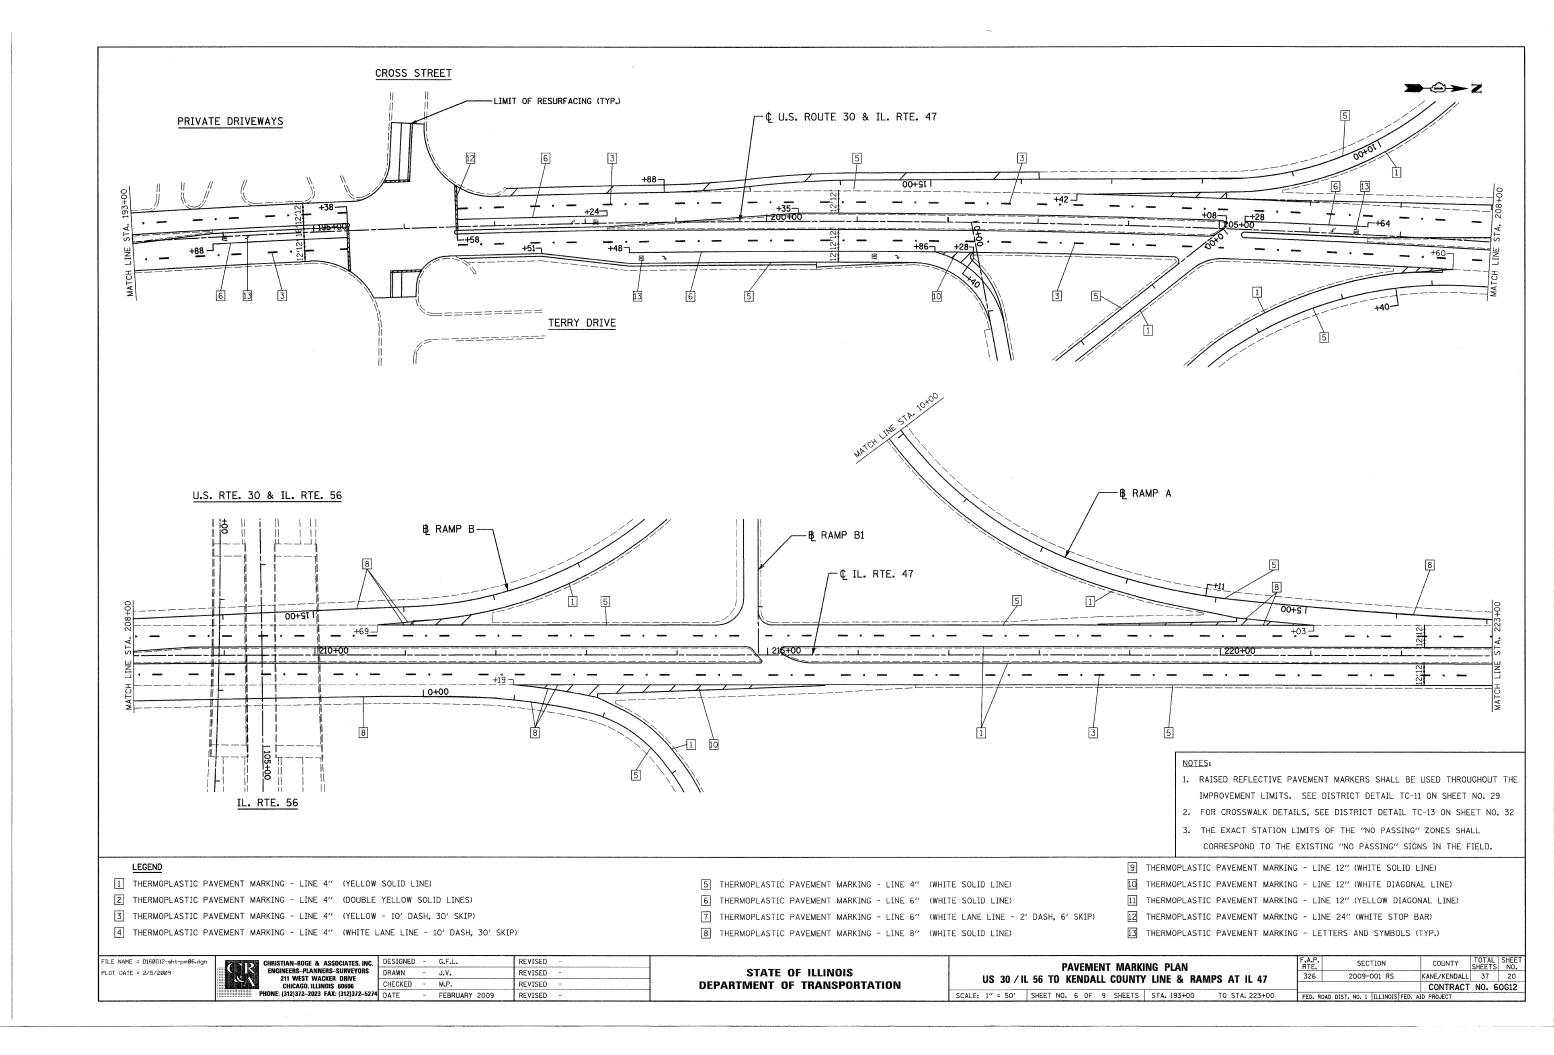

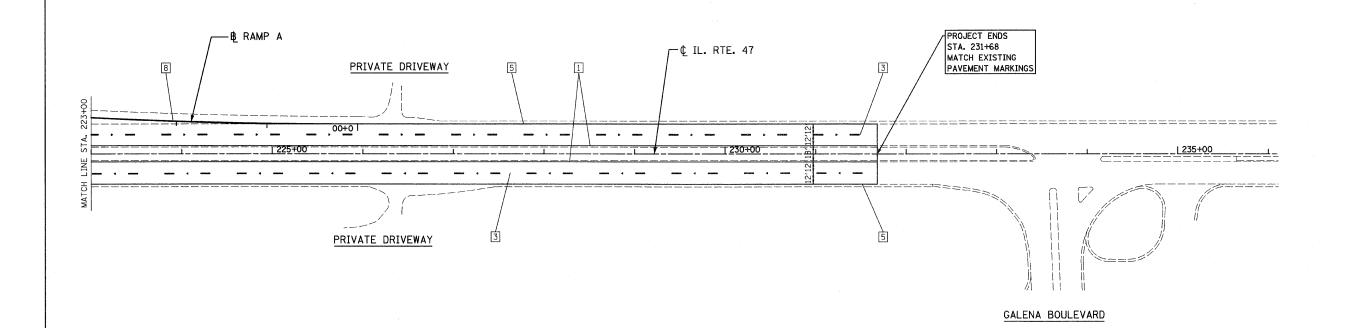

#### NOTES:

- RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11 ON SHEET NO. 29
- 2. FOR CROSSWALK DETAILS, SEE DISTRICT DETAIL TC-13 ON SHEET NO. 32
- 3. THE EXACT STATION LIMITS OF THE "NO PASSING" ZONES SHALL CORRESPOND TO THE EXISTING "NO PASSING" SIGNS IN THE FIELD.

#### LEGEND

- 1 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW SOLID LINE)
- 2 THERMOPLASTIC PAVEMENT MARKING LINE 4" (DOUBLE YELLOW SOLID LINES)
- 3 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW 10' DASH, 30' SKIP)
- 4 THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE LANE LINE 10' DASH, 30' SKIP)

- [5] THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE SOLID LINE)
- 6 THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE SOLID LINE)
- 7 THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE LANE LINE 2' DASH, 6' SKIP)
- 8 THERMOPLASTIC PAVEMENT MARKING LINE 8" (WHITE SOLID LINE)

- 9 THERMOPLASTIC PAVEMENT MARKING LINE 12" (WHITE SOLID LINE)
- THERMOPLASTIC PAVEMENT MARKING LINE 12" (WHITE DIAGONAL LINE)
- 11 THERMOPLASTIC PAVEMENT MARKING LINE 12" (YELLOW DIAGONAL LINE)
- THERMOPLASTIC PAVEMENT MARKING LINE 24" (WHITE STOP BAR)
- THERMOPLASTIC PAVEMENT MARKING LETTERS AND SYMBOLS (TYP.)

FILE NAME = D160G12-sht-pm07.dgn

PLOT DATE = 2/5/2009

CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINOIS 66066
PHONE: (312)372-2023 FAX: (312)372-5274


INC.	DESIGNED	-	G.F.L.	REVISED -	_
RS	DRAWN	-	J.V.	REVISED -	
	CHECKED	-	M.P.	REVISED -	
-5274	DATE	-	FEBRUARY 2009	REVISED -	


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
US 30 / IL 56 TO KENDALL COUNTY LINE & RAMPS AT IL 47

SCALE: 1" = 50" SHEET NO. 7 OF 9 SHEETS STA. 223+00 TO STA. 231+68

F.A.P. RTE.			SI	EC.	ΓIΟ	N			CO	UNTY	•	TOTA	L rs	SHEET NO.
326			200	9-0	001	RS		k	ANE/	KEND	ALL	37		21
									CON	ITR/	CT	NO.	6	0G12
EED D	OAD	DICT	MO	,	71 1	THATE	rrn	410	DDO	CCT				

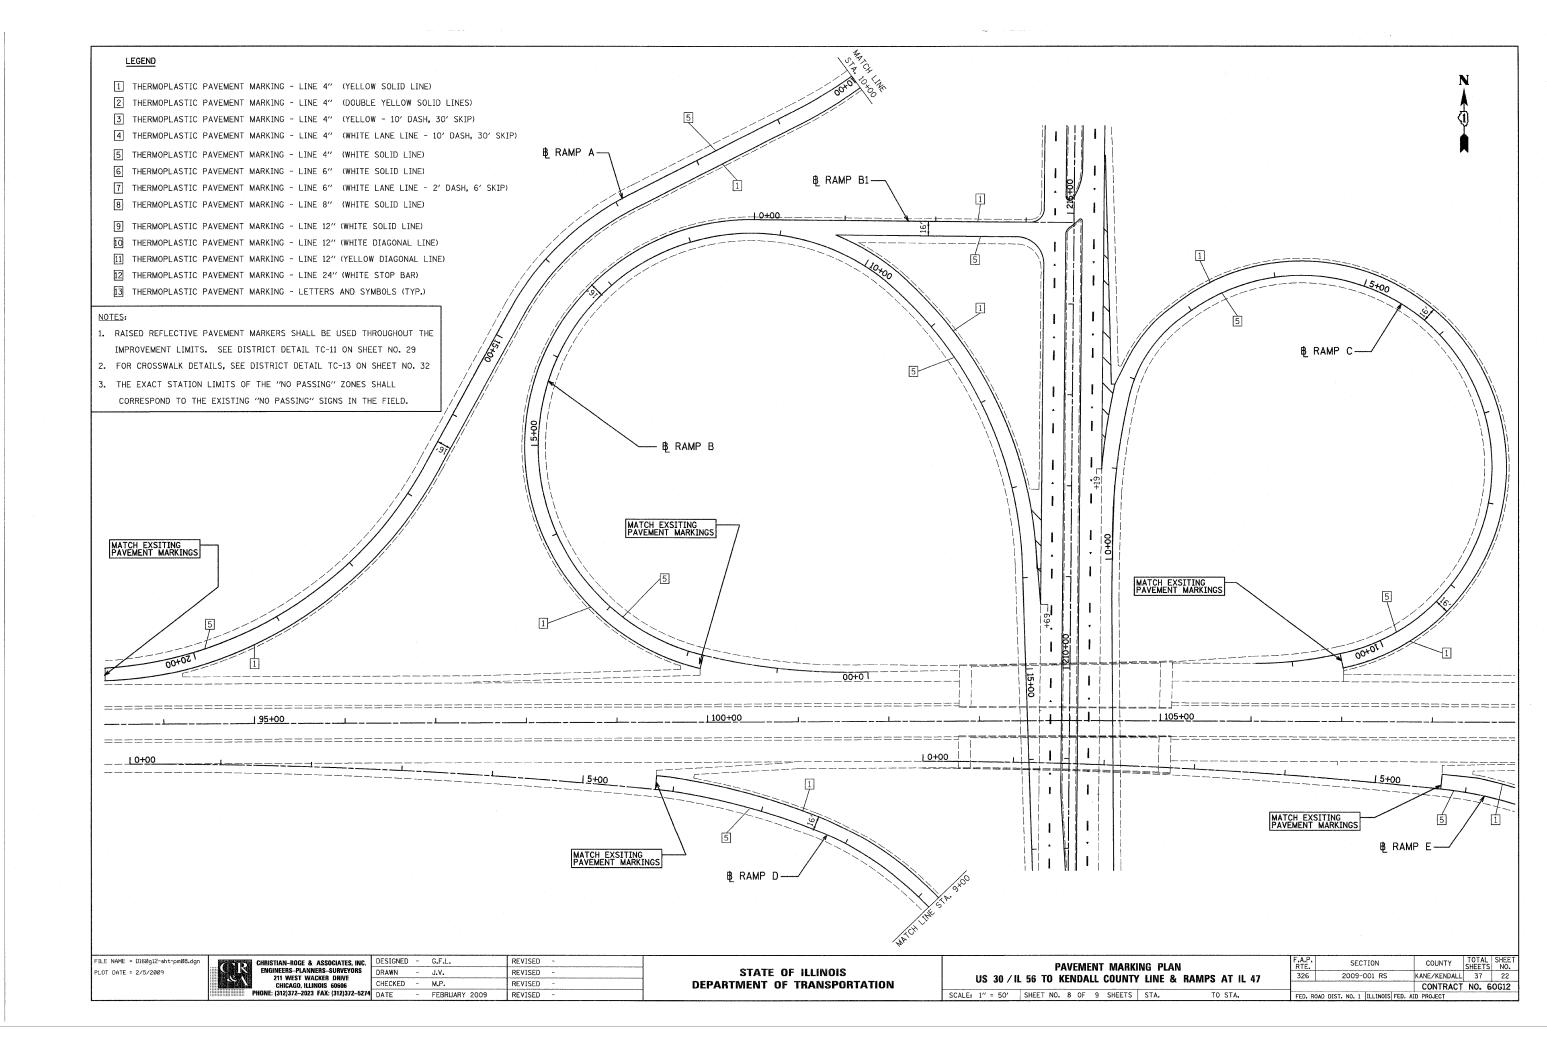

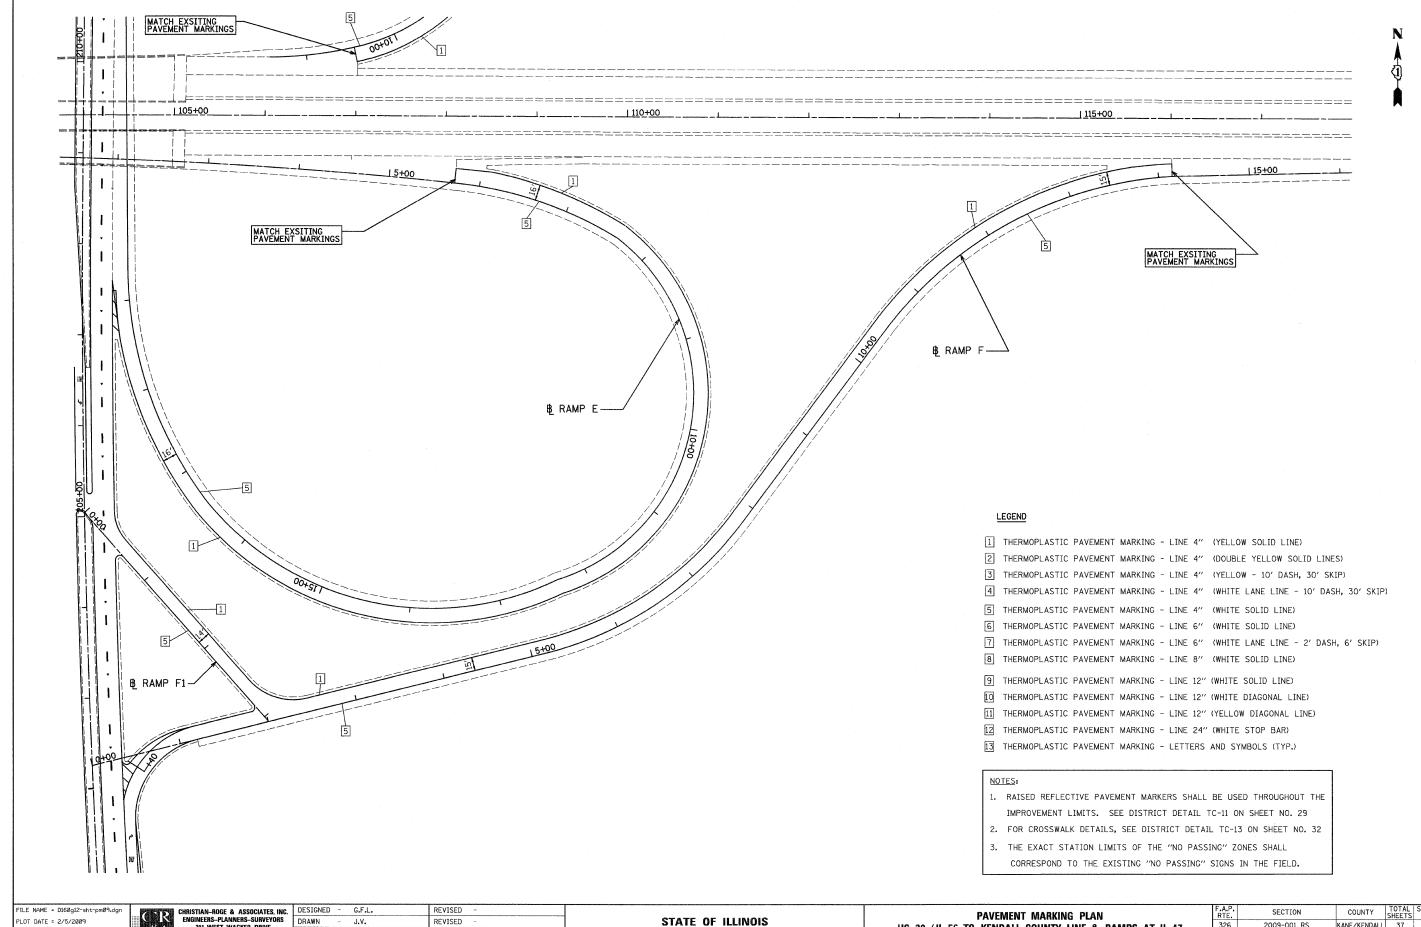


CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS-PLANNERS-SURVEYORS
211 WEST WACKER DRIVE
CHICAGO, ILLINDIS 60606
CHECKE
PHONE: (312)372-2023 FAX: (312)372-3274
DATE

DRAWN J.V. REVISED CHECKED - M.P. REVISED FEBRUARY 2009 REVISED

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

PAVEMENT MARKING PLAN US 30 / IL 56 TO KENDALL COUNTY LINE & RAMPS AT IL 47 SCALE: 1" = 50' SHEET NO. 9 OF 9 SHEETS STA.

TOTAL SHEET SHEETS NO. LL 37 23 2009-001 RS KANE/KENDALL CONTRACT NO. 60G12

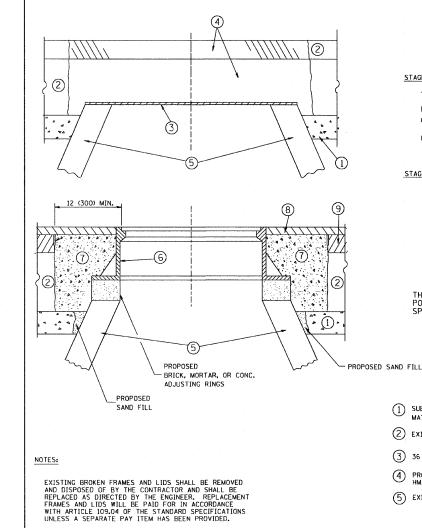

IF THE EXISTING LIDS ARE OPEN, THE FRAME WILL BE ADJUSTED TO THE ELEVATION OF THE MILLED PAVEMENT SURFACE PRIOR TO THE MILLING OPERATION. THE FRAME WILL NOT BE REMOVED AND COVERED BY THE METAL PLATE.

CITY OF CHICAGO CASTINGS ARE THE PROPERTY OF THE CITY AND THE CONTRACTOR SHALL NOTIFY THE CITY FOR REMOVAL AND DISPOSITION OF THE CASTINGS.

THE METAL PLATE USED TO COVER THE STRUCTURE SHALL REMAIN THE PROPERTY OF THE CONTRACTOR.

WHEN STRUCTURES ARE TO BE ADJUSTED OR RECONSTRUCTED, THE LOWERING AND RAISING OF THE FRAMES AND LIDS WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE COST OF THE CORRESPONDING PAY ITEM.

- 1 SUB-BASE GRANULAR MATERIAL
- 2 EXISTING PAVEMENT
- 3 36 (900) DIAMETER METAL PLATE
- PROPOSED CRUSHED STONE AND HMA SURFACE MIX
- 5 EXISTING STRUCTURE

- 6 FRAME AND LID (SEE NOTES)
- CLASS SI CONCRETE, HMA SURFACE COURSE OR HMA BINDER COURSE
  - 8 PROPOSED HMA SURFACE COURSE
  - 9 PROPOSED HMA BINDER COURSE

### LOCATION OF STRUCTURES:

THE CONTRACTOR WILL BE REQUIRED TO KEEP A RECORD OF THE LOCATIONS OF THE BURIED STRUCTURES ACCORDING TO THE STATION AND DISTANCE LEFT OR RIGHT OF THE CENTERLINE OF PAVEMENT. UPON COMPLETION OF THE WORK, THE CONTRACTOR WILL DELIVER THE RECORD TO THE ENGINEER.

CONSTRUCTION PROCEDURES

A) REMOVE A MINIMUM OF 12 (300) OF THE PAVEMENT FROM AROUND THE STRUCTURE. B) REMOVE THE EXISTING FRAME AND LID FROM THE STRUCTURE. C) COVER THE STRUCTURE OPENING WITH A 36 (900) DIAMETER METAL PLATE.

D) BACKFILL WITH CRUSHED STONE AND A MINIMUM 11/2 (40) THICK HMA SURFACE MIX APPROVED BY THE ENGINEER.

A) REMOVE THE HMA SURFACE MIX AND CRUSHED STONE. B) INSTALL THE FRAME AND LID: ADJUST THE FRAME TO ITS FINAL SURFACE ELEVATION.

C) THE SURROUNDING SPACE SHALL BE FILLED WITH CLASS SI CONCRETE, OR HMA SURFACE COURSE OR HMA BINDER COURSE TO THE LEVATION OF THE SURFACE OF THE EXISTING BASE COURSE OR THE BINDER COURSE.

THE PROCEDURE EXPLAINED ABOVE SHALL CONFORM TO THE APPLICABLE PORTIONS OF SECTIONS 353, 406, 602, AND 603 OF THE STANDARD SPECIFICATIONS.

STAGE 1 (BEFORE PAVEMENT MILLING)

STAGE 2 (AFTER PAVEMENT MILLING)

BASIS OF PAYMENT: THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER EACH FOR "FRAMES AND LIDS TO BE ADJUSTED, SPECIAL"

NEW FRAMES AND LIDS, WHEN SPECIFIED, WILL BE PAID FOR SEPARATELY.

### DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING


ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

DESIGNED - R. SHAH REVISED - R. SHAH 03-10-95 FILE NAME = USER NAME = gaglianobt V:\diststd\22x34\bdØ8.dgr DRAWN REVISED - A. ABBAS 03-21-97 CHECKED REVISED - R. WIEDEMAN 05-14-04 10-25-94 REVISED - R. BORO 01-01-07 PLOT DATE = 1/4/2008 DATE

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

**DETAILS FOR** FRAMES AND LIDS ADJUSTMENT WITH MILLING SHEET NO. 1 OF 1 SHEETS STA.

COUNTY TOTAL SHEET NO. KANE/KENDALL 37 24 SECTION 2009-001 RS BD600-03 (BD-8) CONTRACT NO. 60G12

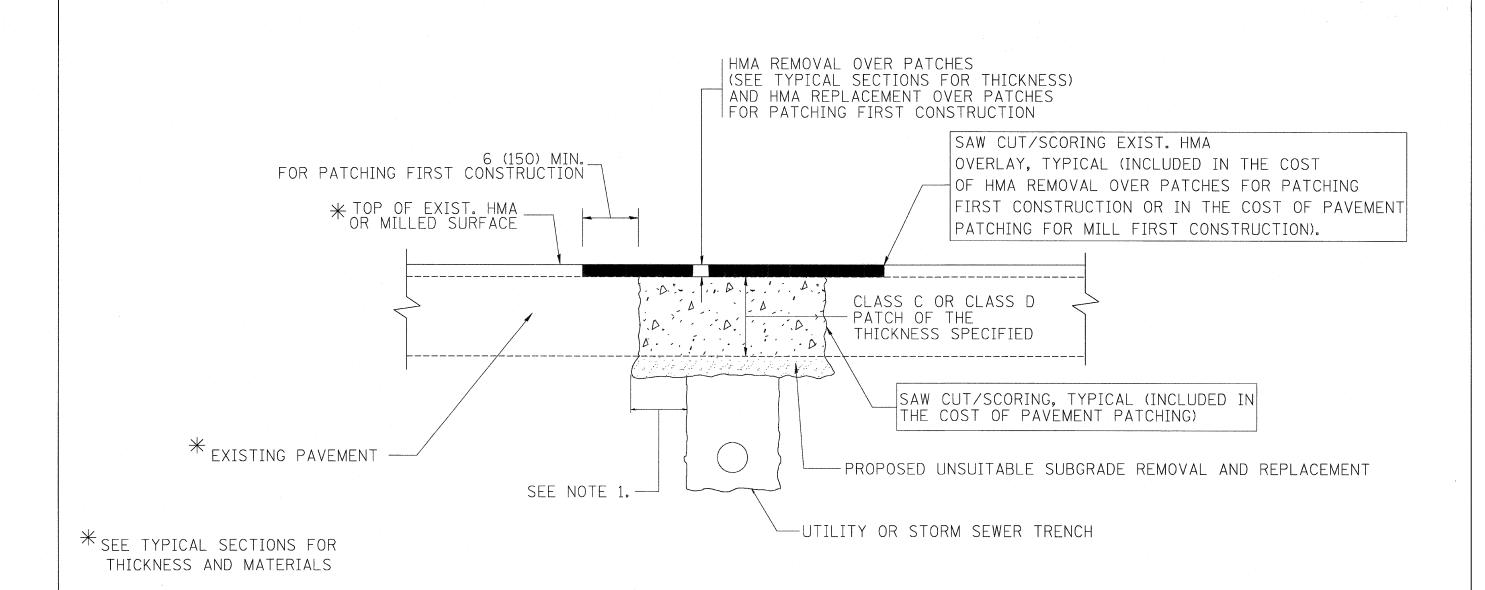

### NOTES:

- 1. THE WIDTH OF THE FULL DEPTH PATCH OVER A TRENCH SHALL BE 12 (300) WIDER ON EACH SIDE OF THE TRENCH.
- 2. FOR METHOD OF MEASUREMENT AND BASIS OF PAYMENT, SEE RECURRING SPECIAL PROVISION "PATCHING WITH HOT-MIX ASPHALT OVERLAY REMOVAL".

#### SEQUENCE OF CONSTRUCTION (PATCHING FIRST)


- 1. REMOVE THE EXISTING HMA MATERIAL OVER THE AREA TO BE PATCHED.
- 2. REMOVE AND REPLACE WITH CLASS C OR D PATCH.
- 3. REPLACE HMA MATERIAL OVER THE AREA TO BE PATCHED.

#### SEQUENCE OF CONSTRUCTION (MILLING FIRST)

- 1. MILL HMA FIRST IF THERE IS AT LEAST 41/2 INCHES OR MORE OF HMA MATERIAL ON TOP OF THE EXISTING PAVEMENT OR IF THE PAVEMENT IS FULL DEPTH HMA. A MINIMUM OF 2 INCHES OF HMA MATERIAL SHALL BE IN PLACE AFTER MILLING.
- 2. REMOVE AND REPLACE WITH FULL DEPTH CLASS D PATCHES TO TOP OF MILLED SURFACE.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.


												- 1
FILE NAME =	USER NAME = bauerdl	DESIGNED - R. SHAH	REVISED - A. ABBAS 04-27-98			DAVITHENT DATOUR	IO FOR	F.A.F	SECTION	COUNTY	TOTAL SHEE	.Ŧ
o:\projects\diststd22x34\bd22.dgn		DRAWN -	REVISED - R. BORO 01-01-07	STATE OF ILLINOIS		PAVEMENT PATCHIN		RIE		KANE/KENDALI	SHEETS NU.	$\dashv$
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED - R. BORO 09-04-07	DEPARTMENT OF TRANSPORTATION		HMA SURFACED PAV	/EMENT	320	RD400_04 (RD_22)	CONTRACT	NO. 60G12	H
	PLOT DATE = 10/27/2008	DATE - 10-25-94	REVISED - K. ENG 10-27-08		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA. TO STA.	FED.	. ROAD DIST. NO. 1 ILLINOIS FED. AT		110. 00012	$\dashv$

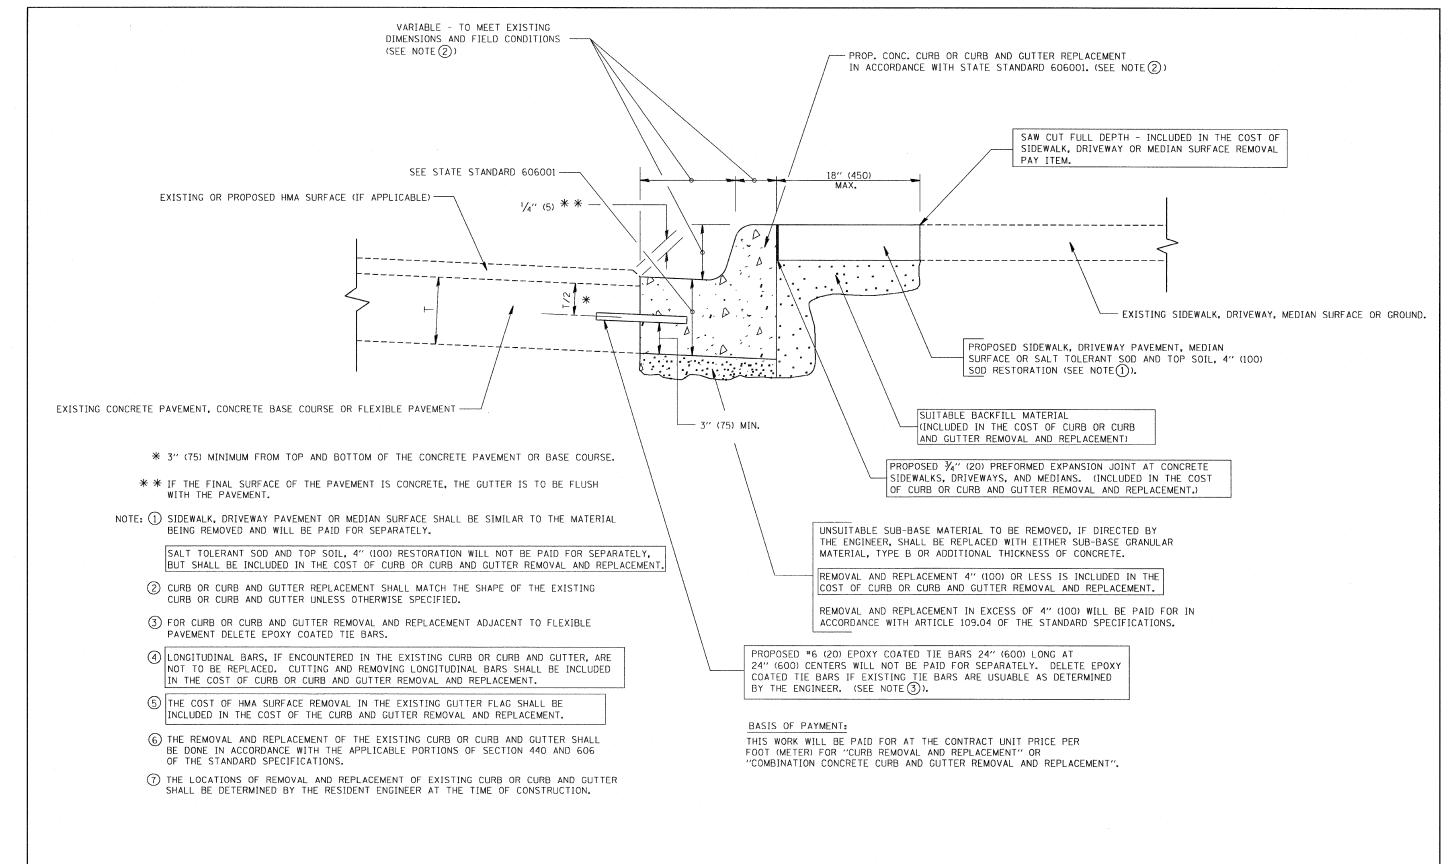


# CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME =	USER NAME = gaglianobt	DESIGNED - A. HOUSEH	REVISED -	- R. SHAH 10-03-96			CURB OR CURB AND GUTTER	F.A	P. SECTION	COUNTY	TOTAL SHEET
W:\diststd\22x34\bd24.dgn		DRAWN -	REVISED -	- A. ABBAS 03-21-97	STATE OF ILLINOIS			32	5 2009-001 RS	KANE/KENDALI	37 26
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -	- M. GOMEZ 01-22-01	DEPARTMENT OF TRANSPORTATION		REMOVAL AND REPLACEMENT		RDSOO_OS (RD_24)	CONTRACT	NO. 60G12
	PLOT DATE = 1/4/2008	DATE - 03-11-94	REVISED -	R. BORO 01-01-07		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FEC	. ROAD DIST. NO. 1   ILLINOIS FED	AID PROJECT	1101 00012

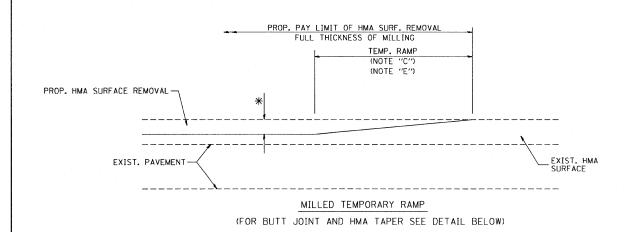


#### OPTION 1

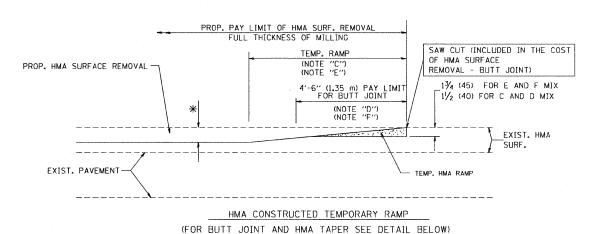

# OPTION 2

#### TYPICAL TEMPORARY RAMP

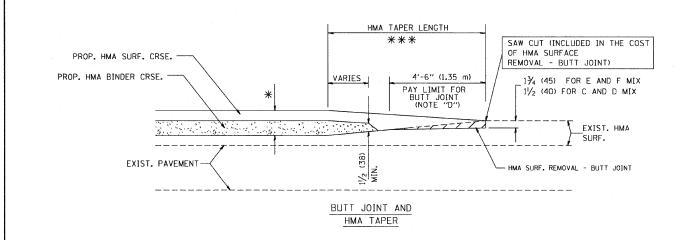


# TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING



PROP. HMA OR PCC
SURFACE REMOVAL - BUTT JOINT
30'-0" (9.0 m) (NOTE "B")
15'-0" (4.5 m) (NOTE "B")
(NOTE "D")

\*\* \* EXIST. PAVEMENT

BUTT JOINT DETAIL

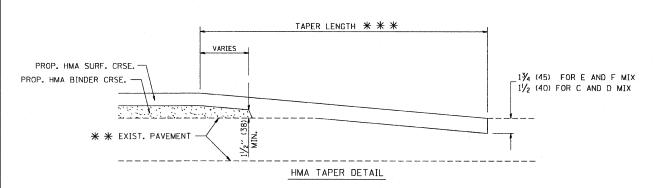

# TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

\* \* PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

#### NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- \* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

#### BASIS OF PAYMENT:


STATE OF ILLINOIS

**DEPARTMENT OF TRANSPORTATION** 

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SOUARE YARD (SOUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

 BUTT JOINT AND					F.A.P. RTE.	SECTION	COUNTY TOTAL SHEETS		SHEET NO.	
HMA TAPER DETAILS					326	2009-001 RS	KANE/KENDALL	37	27	
NINA TAPEN DETAILS						BD400-05 BD32	CONTRACT	NO. (	60G12	
SCALE: NONE	SHEET NO. 1	OF 1	SHEETS	STA.	TO STA.	FED. R	OAD DIST. NO. 1 ILLINOIS FED. A	ID PROJECT		

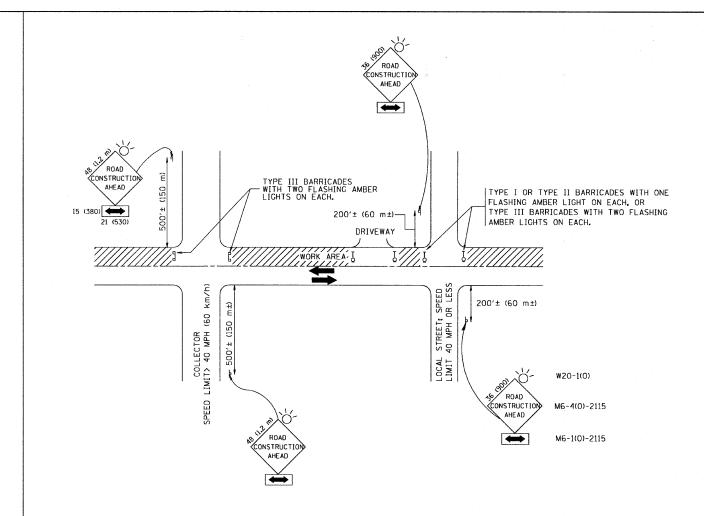

TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

#### NOTES:

- A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS
- SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
- O) ONE **ROAD CONSTRUCTION AHEAD** SIGN 36 × 36 (900×900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE.
- b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION.
- 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
- d) ONE ROAD CONSTRUCTION AHEAD SIGN 48 x 48 (1.2 m x 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE.
- b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION.
- WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (MG-1) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (MG-4).

B. FOR A LANE CLOSURE ON A SIDE ROAD OR DRIVEWAY:

USE APPLICABLE PORTIONS OF THE TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES (STD. 701501, STD. 701606 OR THE APPROPRIATE STANDARD). THE SPACING OF SIGNS AND BARRICADES SHALL BE ADJUSTED FOR FIELD CONDITIONS AS DIRECTED BY THE ENGINEER. THE DIRECTIONAL ARROW SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE SIDE ROAD LANE CLOSURE.

- C. ADVANCE WARNING SIGNS ARE TO BE OMITTED ON DRIVEWAY UNLESS OTHERWISE NOTED.
- D. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCIDENTAL TO THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.


All dimensions are in millimeters (inches) unless otherwise shown.

FILE NAME = USER NAME = gaglianobt DESIGNED - LHA REVISED - J. OBERLE 10-18-95
Wi\distribution 22x34\talfid.dgn

| DRAWN - REVISED - A. HOUSEH 03-06-96
| PLOT SCALE = 50.800 '/ IN. CHECKED - REVISED - A. HOUSEH 10-15-96
| PLOT DATE = 1/4/2008 DATE - 06-89 REVISED - T. RAMMACHER 01-06-00

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TRAFFIC CONTROL AND PROTECTION FOR	F.A.P. RTE.	SEC
SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS	326	2009
		TC
SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FFD. R	DAD DIST NO I

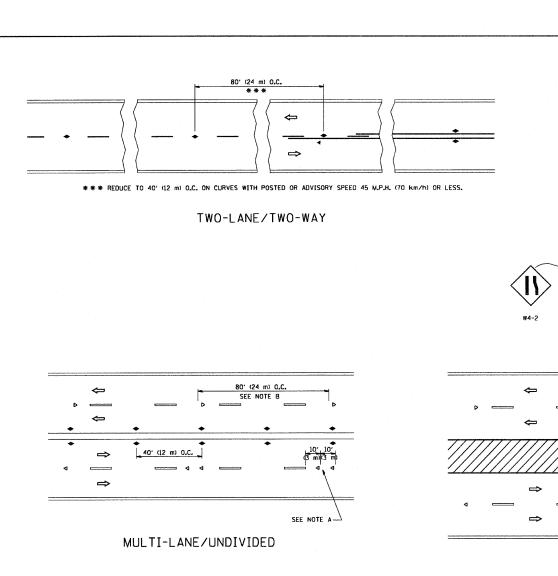

### MULTI-LANE/DIVIDED

80' (24 m)

80' (24 m) O.C.

SEE NOTE B

SEE NOTE A

# GENERAL NOTES


3 e 40' (12 m) O.C.

LANE REDUCTION TRANSITION

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

#### LANE MARKER NOTES

- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

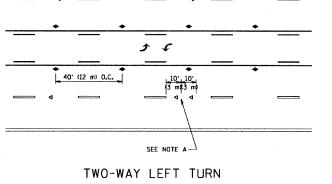


SYMBOLS

- ---- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)
- TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

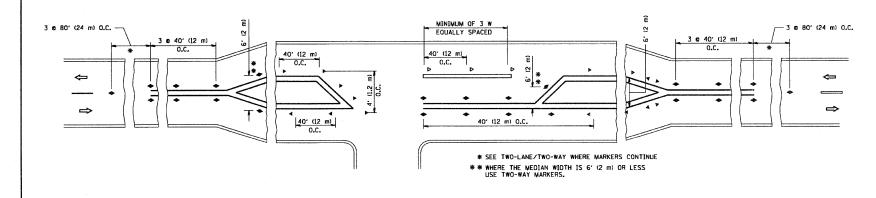


LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME = USER NAME = gaglianobt DESIGNED -REVISED - T. RAMMACHER 09-19-94 SECTION COUNTY TYPICAL APPLICATIONS DRAWN REVISED - T. RAMMACHER 03-12-99 STATE OF ILLINOIS W:\diststd\22x34\to11.dan 2009-001 RS KANE/KENDALL 37 29 RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT) REVISED -T. RAMMACHER 01-06-00 DEPARTMENT OF TRANSPORTATION PLOT SCALE = 50.000 '/ IN. CHECKED -TC-11 CONTRACT NO. 60G12 REVISED SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. PLOT DATE = 1/4/2008 DATE

THE DIAGONAL LINES SHALL BE SPACED AT 40' (12 m) C-C ACROSS ALL STRUCTURES WHICH ARE 500' (150 m) OR LESS IN LENGTH


THE DIAGONAL LINES ARE NOT REQUIRED ON SHOULDERS WHICH ARE 6' (1.8 m) OR LESS IN WIDTH

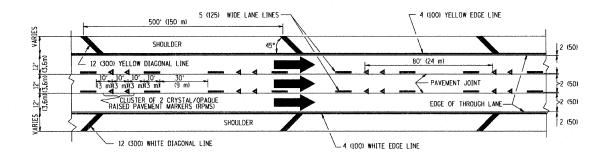


## TYPICAL EDGE LINES & LANE LINES

- NOTES:


  1. THERMO PLASTIC PAVEMENT MARKING LINE SHALL BE USED FOR THE EDGE LINES, GORE LINES, AND DIAGONAL LINES ON BITUMINOUS PAVEMENT ONLY.
- 2. PREFORMED PLASTIC TYPE B PAVEMENT MARKING LINE SHALL BE USED FOR ALL LANE LINES ON BITUMINOUS PAVEMENT
- 3. POLYUREA PAVEMENT MARKING SHALL BE USED FOR ALL MARKINGS ON PCC



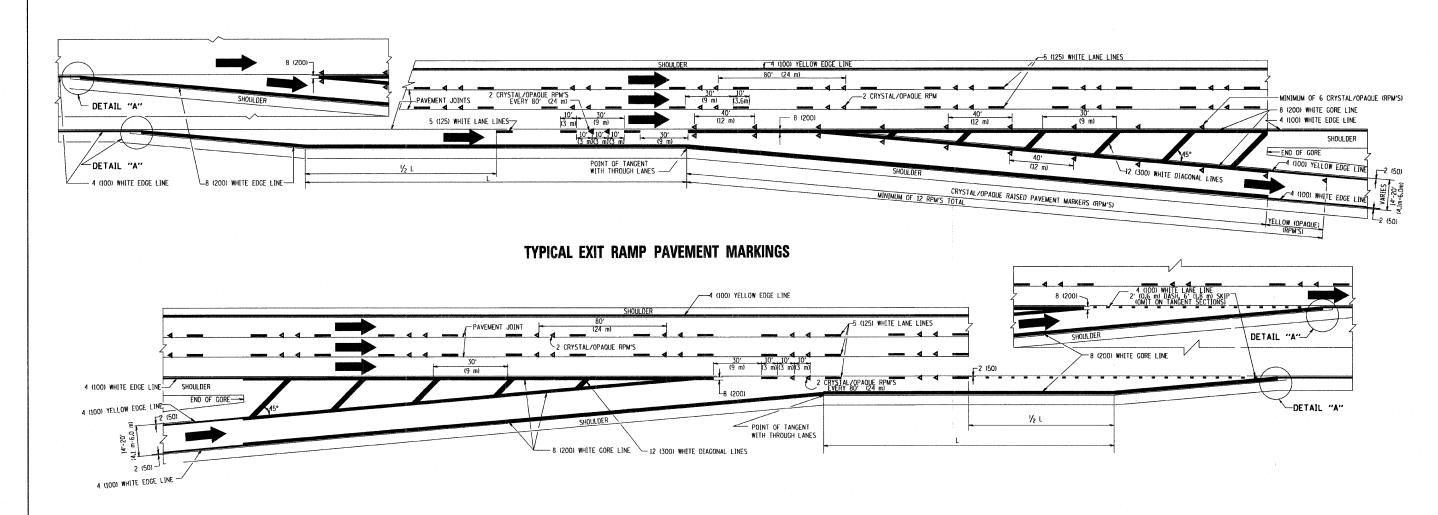


### TYPICAL ENTRANCE RAMP PAVEMENT MARKINGS


FILE NAME =	USER NAME = gaglianobt	DESIGNED - D.W.S.	REVISED - A.H. 03-96			MULTI-LANE FREI	FWAY	F.A.P.	SECTION	COUNTY TOTAL SHEET SHEET NO.
W:\diststd\22x34\to12.dgn		DRAWN -	REVISED - D.W.S. 07-96	STATE OF ILLINOIS		PAVEMENT MARKING		326	2009-001 RS	KANE/KENDALL 37 30
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED - J.A.F. 02-06	DEPARTMENT OF TRANSPORTATION			***************************************		TC-12	CONTRACT NO. 60G12
	PLOT DATE = 1/4/2008	DATE - 01-90	REVISED - S.P.B. 01-07		SCALE: NONE	SHEET NO. 1 OF 2 SHEETS	STA. TO STA.	FED. ROAD	DIST. NO. 1 ILLINOIS FED.	AID PROJECT

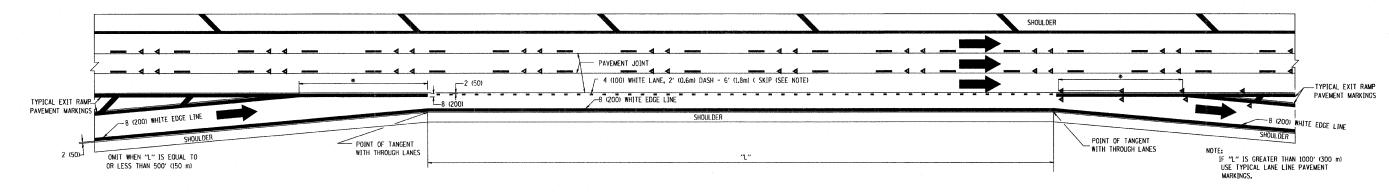

## TYPICAL ENTRANCE/EXIT RAMP COMBINATION PAVEMENT MARKINGS

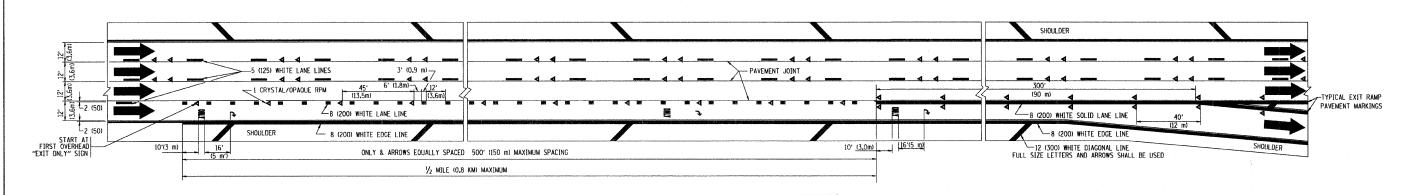



## TYPICAL EXIT ONLY LANE PAVEMENT MARKINGS

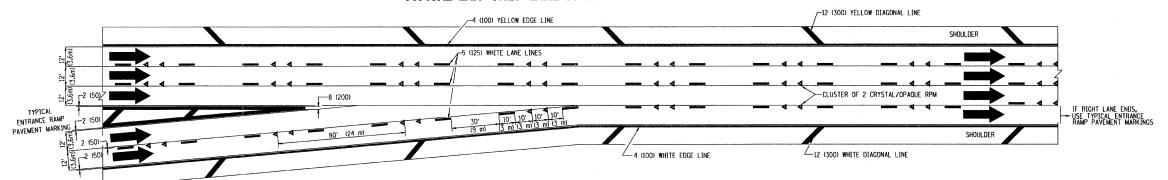


## TYPICAL TWO LANE ENTRANCE RAMP PAVEMENT MARKINGS

FILE NAME =	USER NAME = gaglianobt	DESIGNED - D.W.S.	REVISED - A.H. 03-96		MULTI-LANE FREEWAY	F.A.P.	SECTION	COUNTY TOTAL SHEET NO.
W:\diststd\22x34\to12.dgn		DRAWN -	REVISED - D.W.S. 07-96	STATE OF ILLINOIS		326	2009-001 RS	KANE/KENDALL 37 31
	PLOT SCALE = 50.000 ' / IN.	CHECKED -	REVISED - J.A.F. 02-06	DEPARTMENT OF TRANSPORTATION	PAVEMENT MARKING DETAILS		TC-12	CONTRACT NO. 60G12
	PLOT DATE = 1/4/2008	DATE - 01-90	REVISED - S.P.B. 01-07	·	SCALE: NONE SHEET NO. 2 OF 2 SHEETS STA. TO S	A. FED. RO	AD DIST. NO. 1 ILLINOIS FED.	AID PROJECT

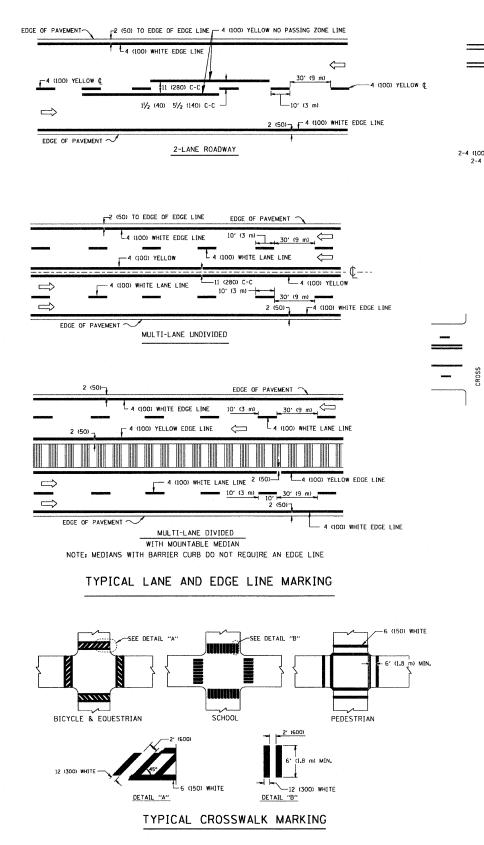




#### 4' (1.2 m) WIDE MEDIANS ONLY

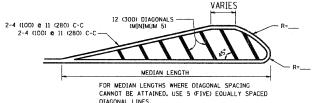


DIAGONAL LINE SPACING: 50' (15 m) C-C (LESS THAN 30MPH (50 km/h))
75' (25 m) C-C 30MPH (50 km/h) T0 45MPH (70 km/h))
150' (45 m) C-C (M0RE THAN 45MPH (70 km/h))

#### MEDIANS OVER 4' (1.2 m) WIDE

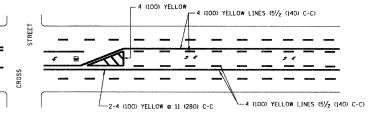


A MINIMUM OF TWO PAIRS OF TURN ARROWS SHALL BE USED, WHITE IN COLOR, ADDITIONAL PAIRS SHALL BE PLACED AT 200' (60 m) TO 300' (90 m) INTERVALS.



MEDIAN WITH TWO-WAY LEFT TURN LANE

#### TYPICAL PAINTED MEDIAN MARKING




FULL SIZE LETTERS 8' (2.4 m) AND ARROWS SHALL BE USED.  $\P$  AREA = 15.6 SO. FT. (1.5 m<sup>2</sup>) [ML] AREA = 20.8 SO. FT. (1.9 m<sup>2</sup>)

\* TURN LANES IN EXCESS OF 400' (120 m) IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW - "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF ARROW - "ONLY".

TYPICAL LEFT (OR RIGHT) TURN LANE

#### TYPICAL TURN LANE MARKING

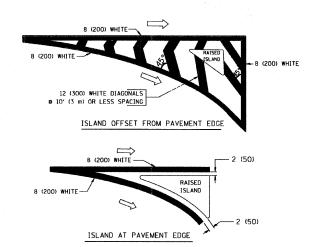

#### TYPICAL ISLAND MARKING


TYPE OF MARKING	WIDTH OF LINE	PATTERN	COLOR	SPACING / REMARKS
CENTERLINE ON 2 LANE PAVEMENT	4 (100)	SKIP-DASH	YELLO₩	10' (3 m) LINE WITH 30' (9 m) SPACE
CENTERLINE ON MULTI-LANE UNDIVEDED PAVEMENT	2 @ 4 (100)	SOLID	YELLOW	11 (280) C-C
NO PASSING ZONE LINES: FOR ONE DIRECTION FOR BOTH DIRECTIONS	4 (100) 2 @ 4 (100)	SOLID SOLID	YELLOW YELLOW	5½ (140) C-C FROM SKIP-DASH CENTERLINE 11 (280) C-C OMIT SKIP-DASH CENTERLINE BETWEEN
LANE LINES	4 (100) 5 (125) ON FREEWAYS	SKIP-DASH SKIP-DASH	WHITE WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE
DOTTED LINES (EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS)	SAME AS LINE BEING EXTENDED	SKIP-DASH	SAME AS LINE BEING EXTENDED	2' (600) LINE WITH 6' (1.8 m) SPACE
EDGE LINES	4 (100)	SOLID	YELLOW-LEFT WHITE-RIGHT	OUTLINE MOUNTABLE MEDIANS IN YELLOW: EDGE LINES ARE NOT USED NEXT TO BARRIER CURB
TURN LANE MARKINGS	6 (150) LINE; FULL SIZE LETTERS & SYMBOLS (8' (2.4m))	SOLID	WHITE	SEE TYPICAL TURN LANE MARKING DETAIL
TWO WAY LEFT TURN MARKING	2 @ 4 (100) EACH DIRECTION	SKIP-DASH AND SOLID	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH; 5½ (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE
	8' (2.4m) LEFT ARROW	IN PAIRS	WHITE	SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL
CROSSWALK LINES (PEDESTRIAN) A. DIAGONALS (BIKE & EQUESTRIAN) B. LONGITUDINAL BARS (SCHOOL)	2 @ 6 (150) 12 (300) @ 45° 12 (300) @ 90°	SOLID SOLID SOLID	WHITE WHITE WHITE	NOT LESS THAN 6' (1.8 m) APART 2' (500) APART 2' (500) APART 5EE TYPICAL CROSSWALK MARKING DETAILS.
STOP LINES	24 (600)	SOLID	WHITE	PLACE 4' (1,2 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK, IF PRESENT, OTHERWISE, PLACE AT DESIRED STOPPING POINT. PARALLEL TO CROSSROAD CENTERLINE, WHERE POSSIBLE
PAINTED MEDIANS	2 @ 4 (100) WITH 12 (300) DIAGONALS	SOLID	YELLOW: TWO WAY TRAFFIC	11 (280) C-C FOR THE DOUBLE LINE
	0 45° NO DIAGONALS USED FOR 4' (1.2 m) WIDE MEDIANS		WHITE: ONE WAY TRAFFIC	SEE TYPICAL PAINTED MEDIAN MARKING.
GORE MARKING AND CHANNELIZING LINES	8 (200) WITH 12 (300) DIACONALS @ 45°	SOLID	WHITE	DIAGONALS: 15' (4,5 m) C-C (LESS THAN 30MPH (50 km/h)) 20' (6 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h)) 30' (9 m) C-C (OVER 45MPH (70 km/h))
RAILROAD CROSSING	24 (600) TRANSVERSE LINES: "RR" IS 6' (1.8 m) LETTERS: 16 (400) LINE FOR "X"	SOLID	WHITE	SEE STATE STANDARD 780001 AREA OF: "R"3-3.6 SQ. FT. (0.33 m²) EACH "X"-54.0 SQ. FT. (5.0 m²)
SHOULDER DIAGONALS	12 (300) @ 45°	SOLID	WHITE - RIGHT YELLOW - LEFT	50' (15 m) C-C (LESS THAN 30MPH (50 km/h)) 75' (25 m) C-C (30 MPH (50 km/h) T0 45MPH (70 km/h)) 150' (45 m) C-C (0VER 45MPH (70 km/h))


FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.


All dimensions are in inches (millimeters) unless otherwise shown.


"ILE NAME =	USER NAME = gaglianobt	DESIGNED - EVERS	REVISED -T. RAMMACHER 10-27-94
li\diststd\22x34\to13.dgn		DRAWN -	REVISED -A. HOUSEH 10-09-96
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -A. HOUSEH 10-17-96
	PLOT DATE = 1/4/2008	DATE - 03-19-90	REVISED -T. RAMMACHER 01-06-00

-		DISTRICT (					F.A.P. RTE.	SECTION	COUNTY TOTA		OTAL SHEET HEETS NO.	
	TYPICAL PAVEMENT MARKINGS						326	2009-001 RS	KANE/KENDALL	37	32	
								TC-13	CONTRACT	NO. 6	0G12	
	SCALE: NONE	SHEET NO. 1	OF 1	SHEETS	STA.	TO STA.	FED. RO	OAD DIST. NO. 1   ILLINOIS FED. A	ID PROJECT			

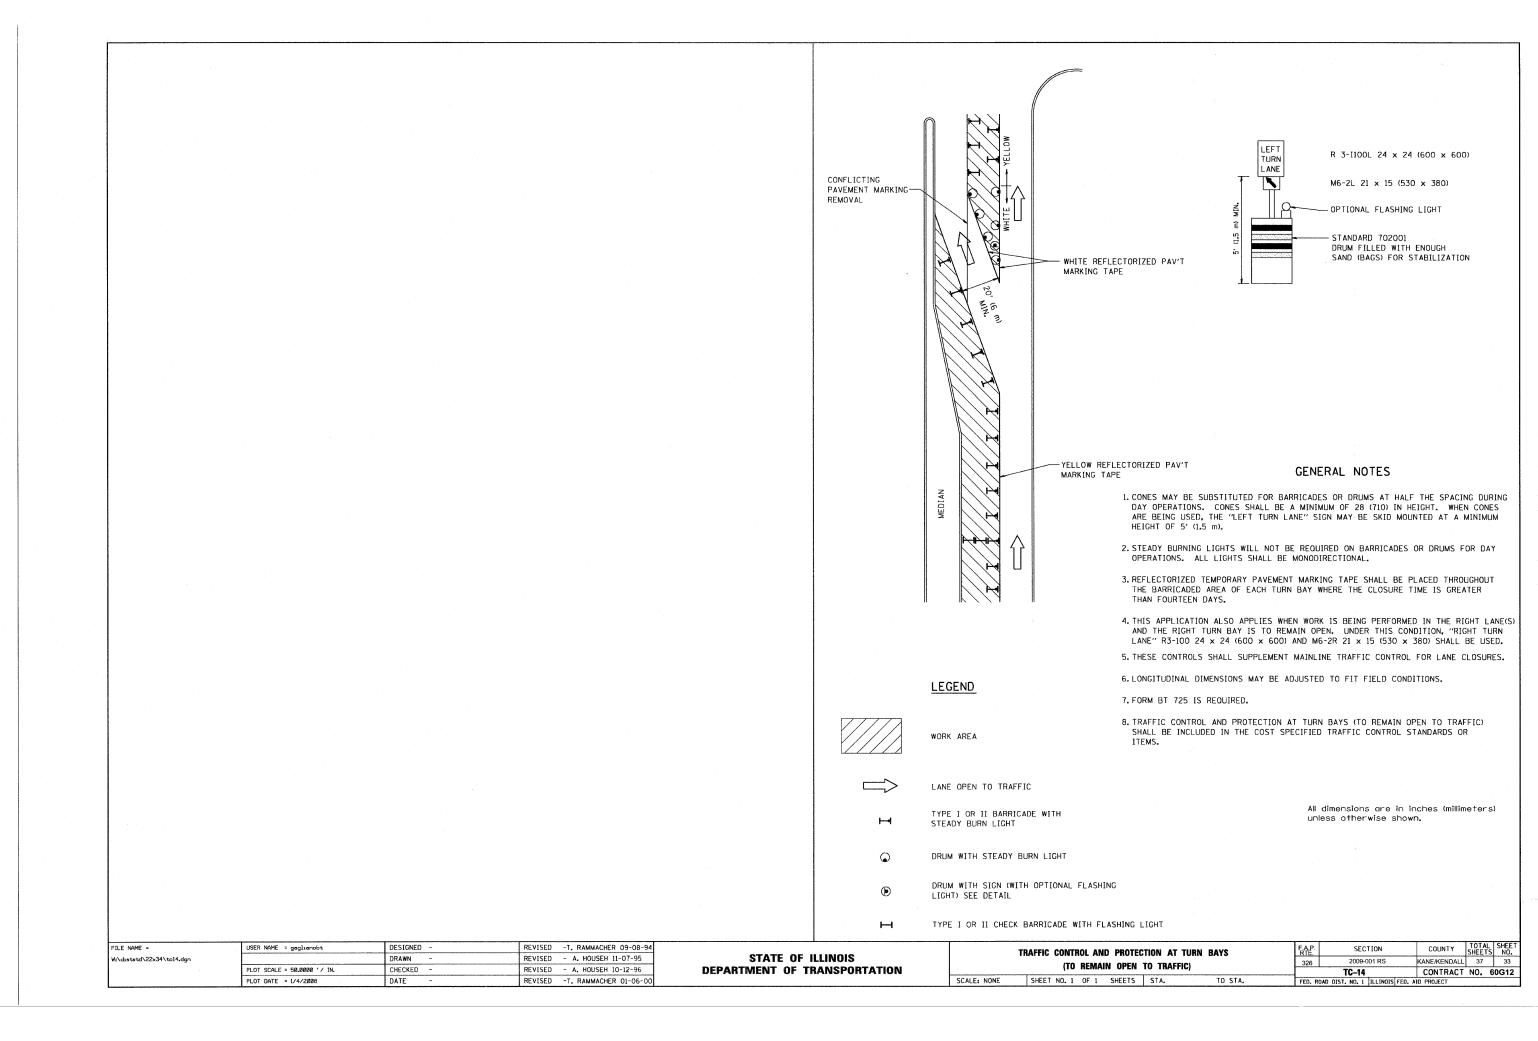

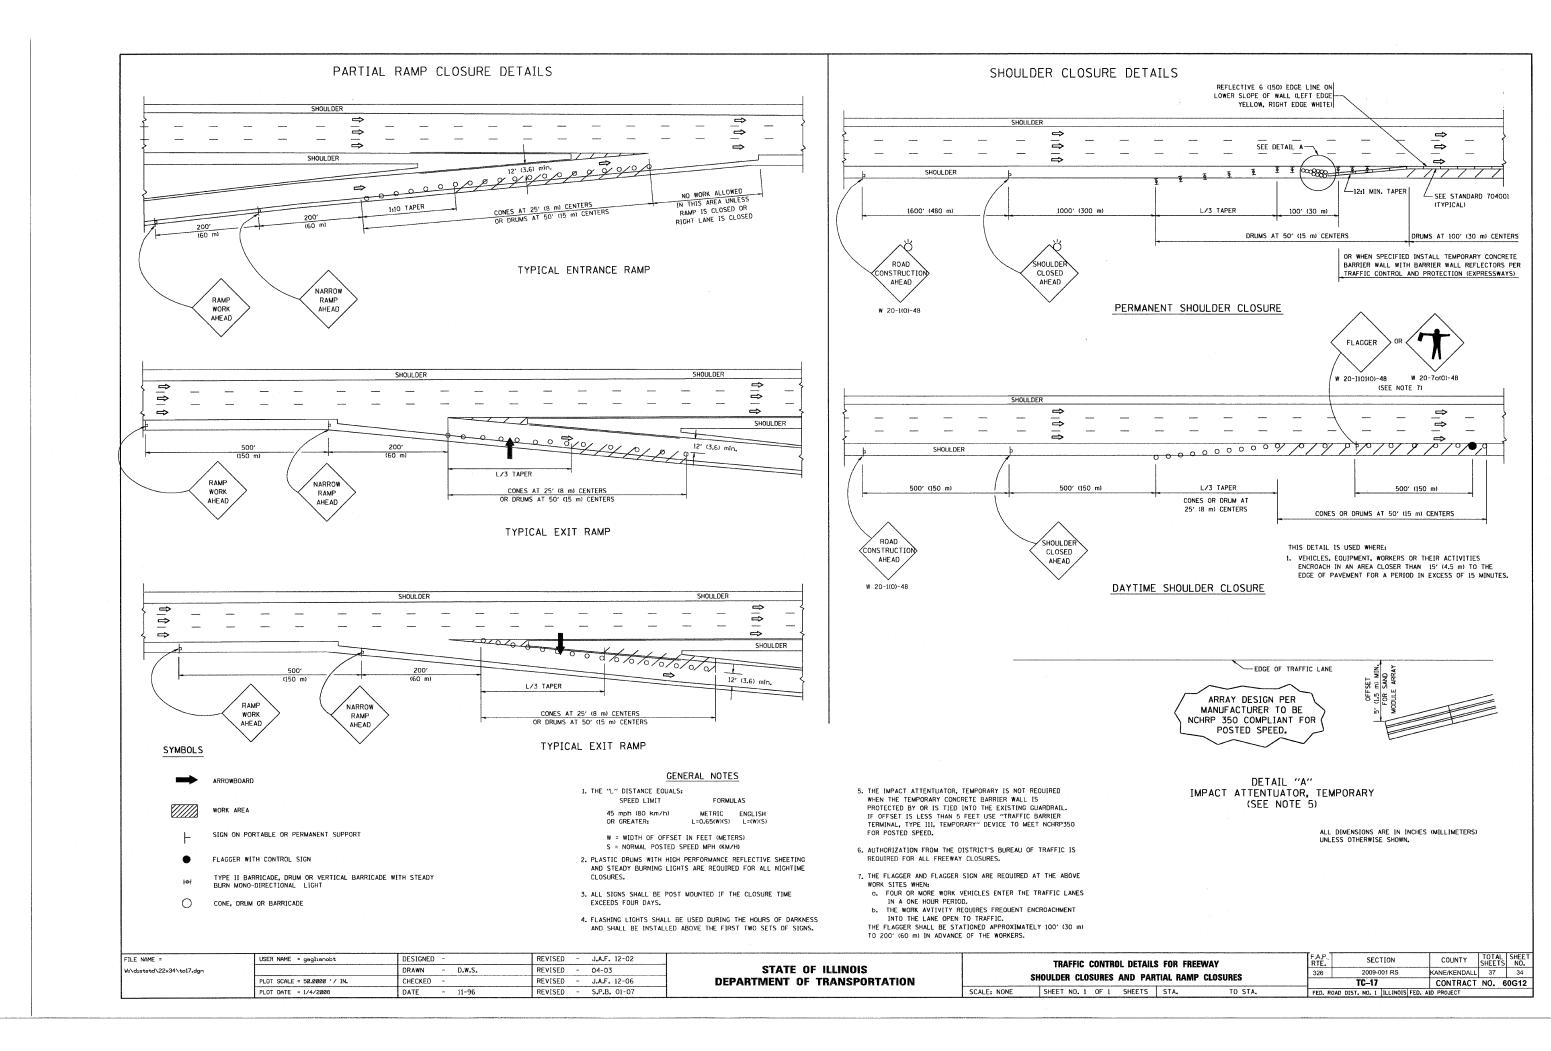


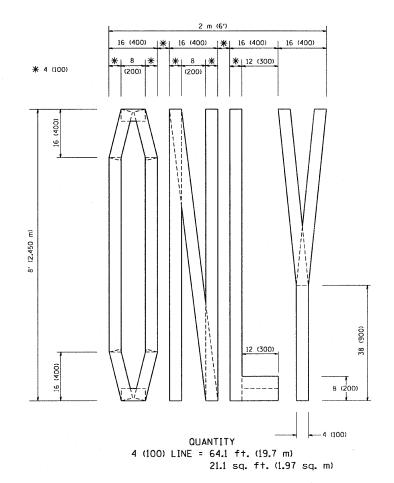

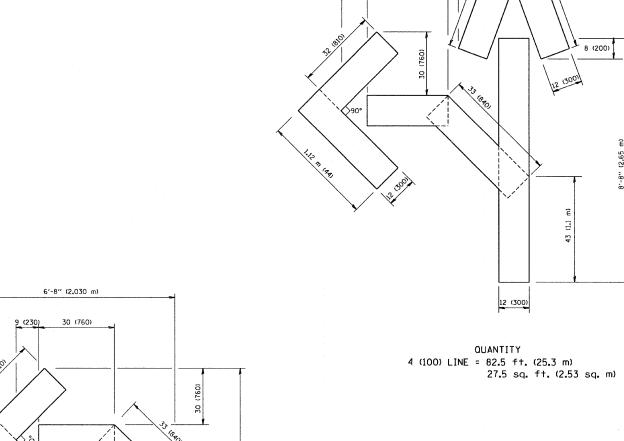

30 (800)

9 (230)

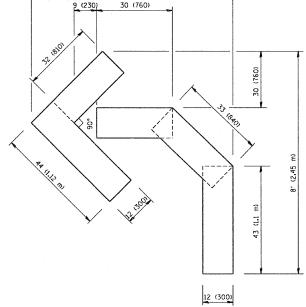


OUANTITY 4 (100) LINE = 45.5 ft. (13.9 m) 15.2 sq. ft. (1.39 sq. m)

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = gaglianobt	DESIGNED -	REVISED -T. RAMMACHER 06-05-96
W:\diststd\22x34\tc16.dgn		DRAWN -	REVISED -T. RAMMACHER 11-04-97
	PLOT SCALE = 50.0000 '/ IN.	CHECKED -	REVISED -T. RAMMACHER 03-02-98
	PLOT DATE = 1/4/2008	DATE - 09-18-94	REVISED -E. GOMEZ 08-28-00

STATE	: OF	ILLINOIS	
DEPARTMENT	0F	TRANSPORTATION	

		PAVEMENT MARKING LETTERS AND SYMBOLS FOR TRAFFIC STAGING						SECTION	COUNTY TOTAL SHEETS		SHEET NO.
								2009-001 RS	KANE/KENDALL	37	35
-	FOR THATFIC STAUMU							TC-16	CONTRACT	NO. 6	0G12
	SCALE: NONE	SHEET NO. 1	OF 1	SHEETS	STA.	TO STA.	FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

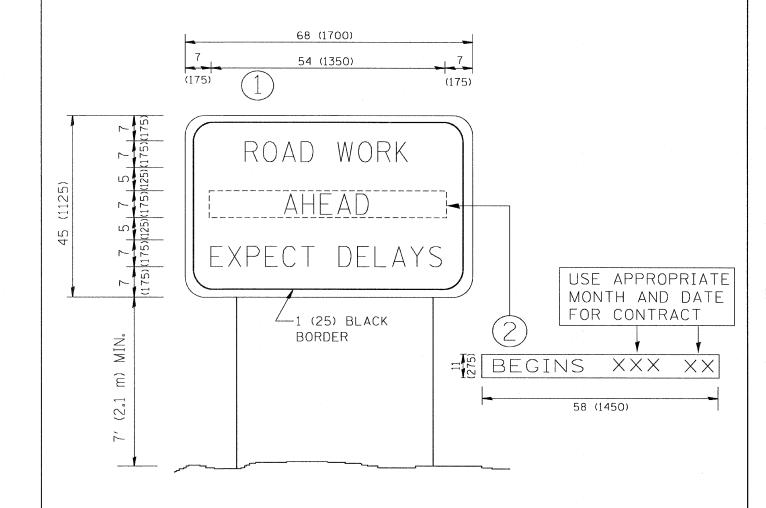


## NOTES:

- 1. USE BLACK LETTERING ON ORANGE BACKGROUND.
- 2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
- 3. ERECT SIGN (1) WITH INSTALLED PANEL (2) ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
- 4. REMOVE PANEL 2 SOON AFTER THE START OF CONSTRUCTION.
- 5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
- 6. ONE SIGN ASSEMBLY EQUALS 25.70 SQ. FT. (2.3 SQ. M.)
- 7. SHALL BE PAID FOR AS TEMPORARY INFORMATION SIGNING.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS)
UNLESS OTHERWISE SHOWN.


FILE NAME =	USER NAME = gaglianobt	DESIGNED -	REVISED - R. MIRS 09-15-97		<u> </u>	ARTERIAL ROAD		F.A.P.	SECTION	COUNTY	TOTAL	SHEET
W:\diststd\22x34\to22.dgn		DRAWN -	REVISED - R. MIRS 12-11-97	STATE OF ILLINOIS		INFORMATION SIGN		326	2009-001 RS	KANE/KENDALI	L 37	36
	PLOT SCALE = 50.000 '/ IN.	CHECKED ~	REVISED -T. RAMMACHER 02-02-99	DEPARTMENT OF TRANSPORTATION		INFURINATION SIGN			TC-22	CONTRACT	F NO. 6	0G12
	PLOT DATE = 1/4/2008	DATE -	REVISED - C. JUCIUS 01-31-07		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA.	TO STA.	FED. ROAD	DIST. NO. 1 ILLINOIS FED.	AID PROJECT		

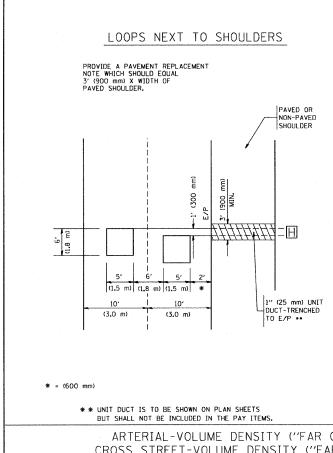

#### LEFT TURN LANES WITH MEDIANS VOLUME DENSITY ("FAR OUT" DETECTION) ON SAME APPROACH


(PROTECTED / PERMITTED LEFT TURN PHASING)

HANDHOLE LOCATION MAY
VARY DEFENDING ON GEOMETRICS
AND DESIGN OF TRAFFIC SIGNALS.
HEAVY-DUTY HANDHOLES TO BE
USED WHEN THE MEDIAN IS
MOUNTABLE. REFER TO STANDARD
BIADOL TO ENSURE THAT HANDHOLE

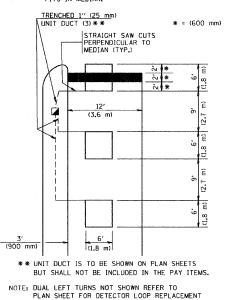

#### LEFT TURN LANES WITHOUT MEDIANS VOLUME DENSITY ("FAR OUT" DETECTION) ON SAME APPROACH


(PROTECTED / PERMITTED LEFT TURN PHASING)

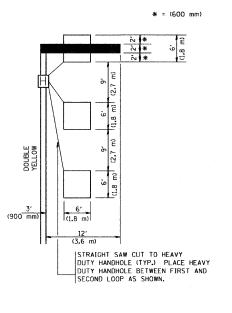


NOTE: DUAL LEFT TURNS NOT SHOWN REFER TO PLAN SHEET FOR DETECTOR LOOP REPLACEMENT

ARTERIAL-VOLUME DENSITY ("FAR OUT" DETECTION) CROSS STREET-VOLUME DENSITY ("FAR OUT" DETECTION)

ARTERIAL-VOLUME DENSITY ("FAR OUT" DETECTION) CROSS STREET-NON VOLUME DENSITY ("UPTIGHT" PRESENCE DETECTION)

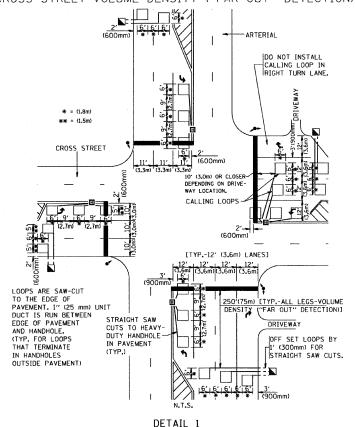

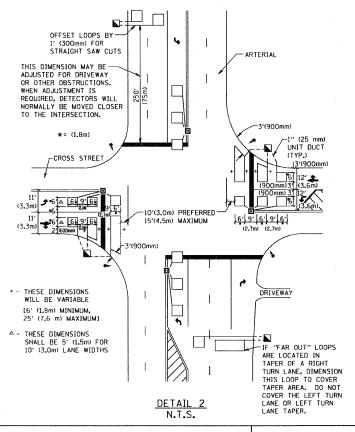

#### NOTES:

#### VEHICLES LOOP DETECTORS

- \* ALL LEAD IN CABLE SHALL BE TWO CONDUCTOR NO. 14 TWISTED, SHIELDED.
- \* EACH DETECTOR LOOP SHALL HAVE ITS OWN SAW CUT FROM THE LOOP TO THE EDGE OF PAVEMENT OR TO A HANDHOLE IN THE PAVEMENT.
- \* EACH DETECTOR LOOP SHALL HAVE ITS OWN ONE INCH (25 mm) UNIT DUCT BETWEEN THE EDGE OF PAVEMENT AND THE FIRST HANDHOLE OR JUNCTION BOX. EACH UNIT DUCT RUN SHALL BE SHOWN ON THE PLANS BY THE DESIGNER, BUT SHALL NOT BE PAID FOR SEPARATLY. THIS ITEM IS INCIDENTAL TO THE PAY ITEM FOR DETECTOR LOOPS.
- \* ONE DIMENSION OF ALL DETECTOR LOOPS SHALL BE SIX FEET
- \* EACH LANE OF NON-LOCKING, PRESENCE DETECTION AND EACH LANE OF A DOUBLE LEFT TURN LANE REQUIRES A SEPARATE INDUCTIVE LOOP DETECTOR AND LEAD IN CABLE.
- \* WHEN NON-LOCKING, PRESENCE DETECTION IS USED, MORE THAN ONE LOOP PER LANE IS REQUIRED BEHIND THE STOP BAR (i.e. 1-1/2, 1-3/4, 2),
- \* WHEN SYSTEM LOOPS ARE REQUIRED ON AN APPROACH OF AN INTERSECTION, THE LOOPS USED FOR VOLUME DENSITY AND INTERSECTION TIMING SHALL ALSO BE USED AS SYSTEM DETECTORS. EACH ONE OF THESE TYPE OF LOOPS REQUIRES A SEPARATE TWO CONDUCTOR NO. 14 TWISTED SHIELDED CABLE AND A SEPARATE INDUCTIVE LOOP DETECTOR WHEN NEW CONTROLLERS ARE UTILIZED. THE DESIGNER SHALL LABEL THESE TYPES OF LOOPS AS "INTERSECTION AND SAMPLING (SYSTEM) DETECTORS" ON THE SIGNAL LAYOUT, THE INTERCONNECT PLAN AND THE SYSTEM CABLE PLAN. WHEN AN EXISTING CONTROLLER IS UTILIZED FOR THIS TYPE OF DETECTION, THE PAY ITEM "INDUCTIVE LOOP DETECTOR WITH SYSTEM OUTPUT" SHOULD BE USED.

#### PLACEMENT OF DETECTORS

THE FOLLOWING FIGURES REPRESENT THE MOST COMMON DETECTOR LOOP LOCATIONS AND SIZES. ADJUSTMENTS WILL BE NECESSARY FOR SPECIFIC GEOMETRIC CONSIDERATIONS.

LOCATIONS AND DEMENSIONS OF DETECTOR LOOPS ARE REQUIRED ON ALL SIGNAL LAYOUT PLAN SHEETS.

"FAR OUT" DETECTION REFERS TO LOCKING, PRESENCE TYPE DETECTION LOCATED IN THRU LANES, RIGHT TURN LANES, AND RIGHT TURN LANE TAPER AREAS (IF APPLICABLE), USUALLY 250' (75 m) IN ADVANCE OF STOP BARS. "UPTIGHT" DETECTION REFERS TO NON-LOCKING PRESENCE TYPE DETECTION LOCATED IN ALL LANES AND 10'-15' (3.0 m-4.5 m) BEHIND THE CROSSING STREET'S EDGE OF PAVEMENT EXTENDED.

#### NOTE:

ALL DETAILS AND NOTES SHOWN ARE FROM THE I.D.O.T. DISTRICT 1 TRAFFIC SIGNAL DESIGN GUIDELINES DATED JANUARY 1995

THIS DRAWING HAS BEEN PREPARED TO ASSIST THE RESIDENT ENGINEER FOR ALL ROADWAY RESURFACING OR S.M.A.R.T. PROJECTS WHERE THE DIMENSIONS ARE NOT SHOWN ON THE PLANS AND THE FINAL LOCATIONS FOR CROSSWALKS OR STOP BARS ARE NOT DETERMINED.

COUNTY

KANE/KENDALL 37

CONTRACT NO. 60G12

	112.			
FILE NAME =	USER NAME = gaglianobt	DESIGNED -	REVISED -	Γ
W:\diststd\22x34\ts07.dgn		DRAWN -	REVISED -	ı
	PLOT SCALE = 50.0000 '/ IN.	CHECKED - R.K.F.	REVISED -	
	PLOT DATE = 1/4/2008	DATE -	REVISED -	l

DISTRICT 1 - DETECTOR LOOP INSTALLATION	F.A.P. RTE.	SECTIO
DETAILS FOR ROADWAY RESURFACING	326	2009-001
DEIMILO FUR NUMPYVAT RESURFACINU		TS-07
SCALE: NONE   SHEET NO. 1 OF 1 SHEETS   STA. TO STA.	FED. ROA	D DIST, NO. 1 ILI