


- NOTES:
1. ALL LIGHTING CONDUIT EMBEDDED IN CONCRETE AND ALL LIGHT POLE ANCHOR RODS SHALL BE PAID FOR UNDER THE CONCRETE SUPERSTRUCTURE.
  2. EXTEND EMPTY LIGHTING CONDUIT INTO THE GROUND TO EDGE OF BRIDGE APPROACH, CAP WATERTIGHT AND RECORD LOCATION.
  3. (2) 24"x24"x10" STAINLESS STEEL JUNCTION BOXES ATTACHED TO STRUCTURE FOR 5" RGS CONDUIT, (2) 16"x12"x6" STAINLESS STEEL JUNCTION BOXES ATTACHED TO STRUCTURE FOR 2 1/2" RGS CONDUIT. EACH CONDUIT SHALL BE CONNECTED TO A SEPARATE JUNCTION BOX. SEE LIGHTING/ITS DETAILS FOR MORE DETAIL.

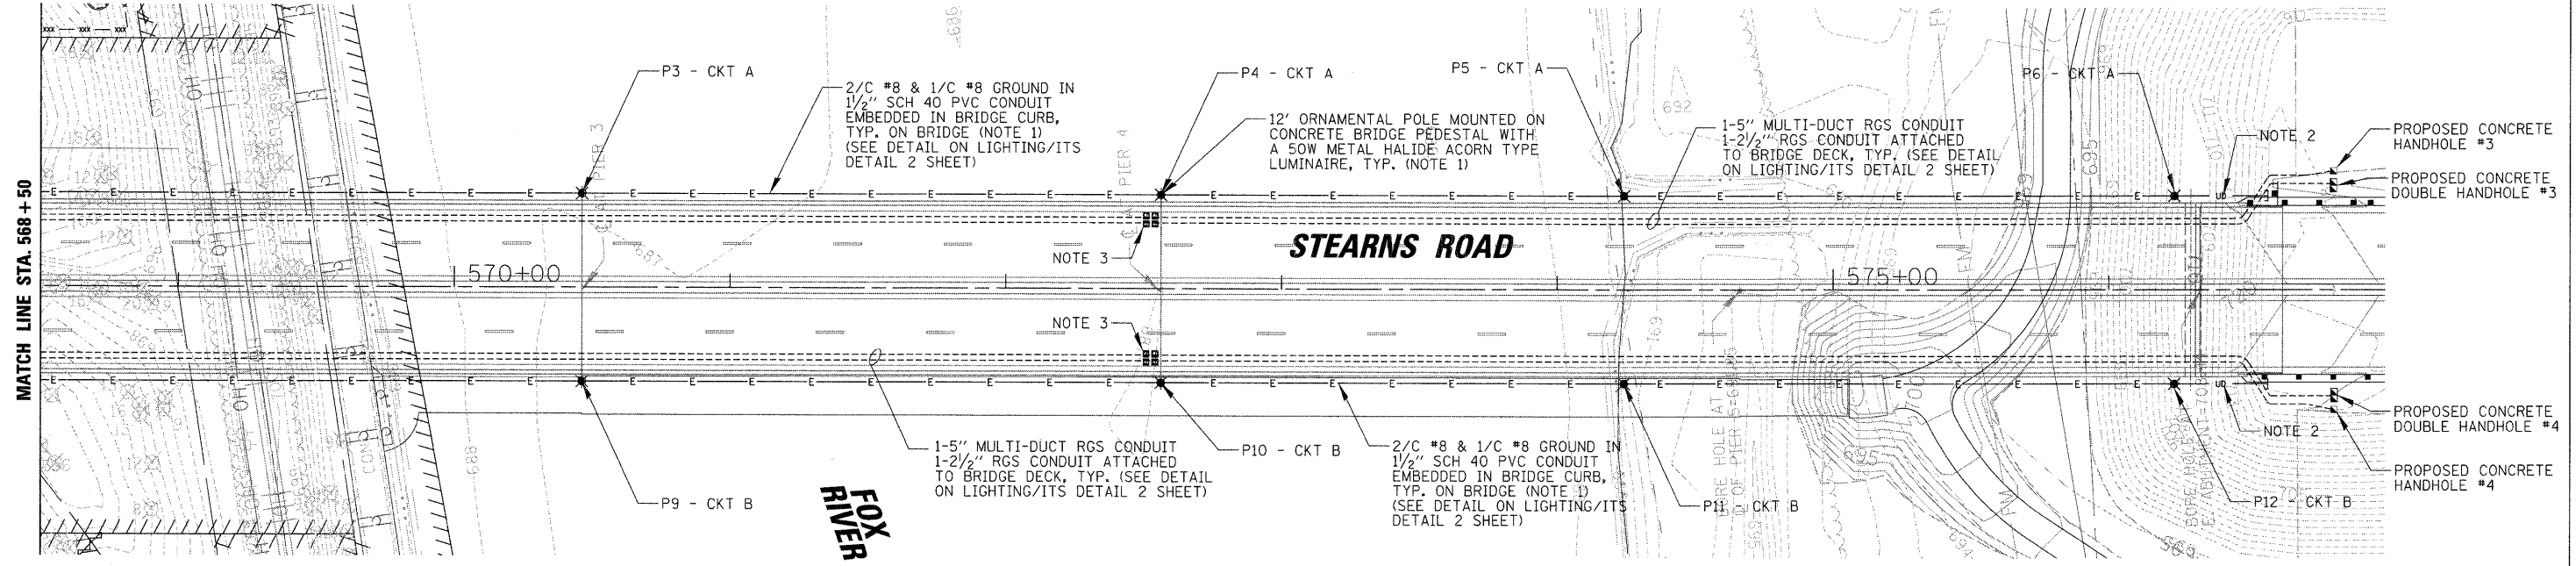

FILE NAME = LGT\_070793-01.pln  
 USER NAME = GTINE  
 PLOT SCALE = 30'  
 PLOT DATE = 2/10/2009

DESIGNED	AJD	REVISED	-
DRAWN	KWB	REVISED	-
CHECKED	AJD	REVISED	-
DATE	01/16/09	REVISED	-

**STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION**

<b>STEARNS ROAD BRIDGE    LIGHTING / ITS PLAN</b>	
SCALE: 1"= 30'	SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
361	06-00214-20-BR	KANE	320	93
CONTRACT NO. 63075				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				