


F.A. RTE. 504 & 789	SECTION 103RS-1, 56RS-2	COUNTY MADISON	TOTAL SHEETS 8	SHEET NO. 7
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

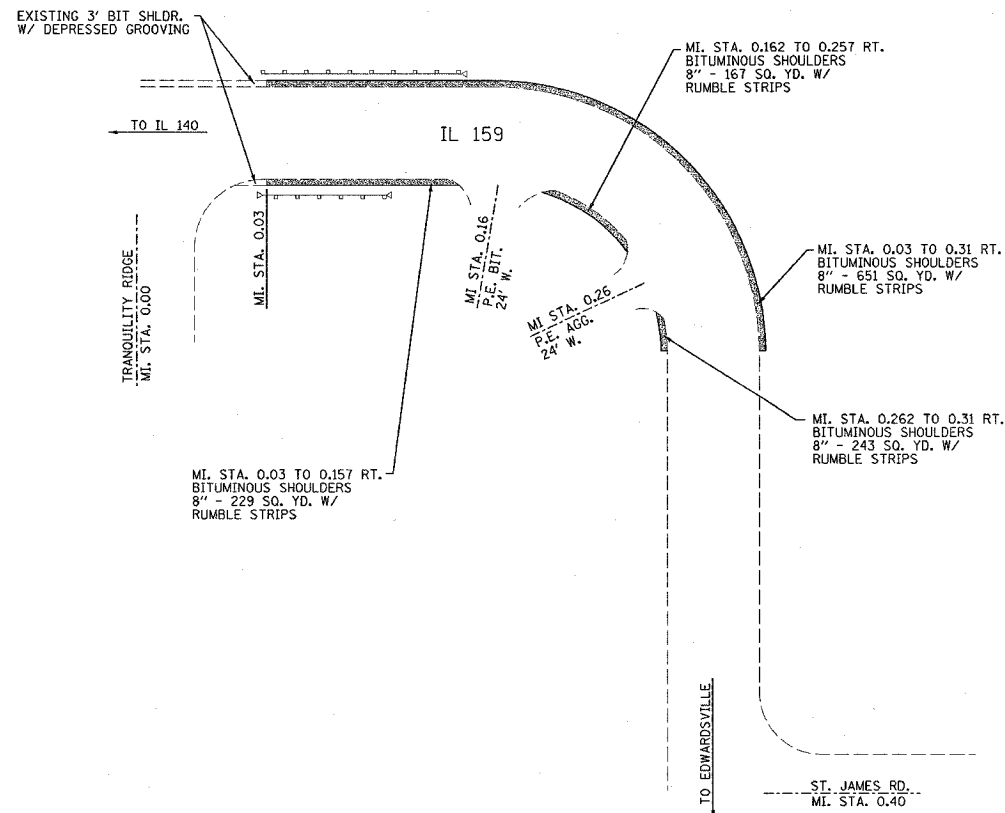

LOCATION #1 SHOULDER SCHEDULE

MI. STA. TO MI. STA.	OFFSET	SHLDR. WIDTH (FT.)	THICKNESS (IN.)	BIT. SHLDR. 8" (SQ. YD.)	EXCAVATING & GRADING EXIST. SHOULDER (UNIT)	RUMBLE STRIPS (FT.)
0.030 - 0.157	RT	3	8	224	6.7	671
0.162 - 0.257	RT	3	8	167	5.0	502
0.262 - 0.310	RT	3	8	84	2.5	253
0.030 - 0.310	LT	3	8	493	14.8	1478
TOTAL =				968	29.0	2904

NOTE: GAP SHOULDERS AT ALL MAIL BOX TURNOUTS, SIDEROADS AND ENTRANCES

LOCATION #1 PLAN VIEW
IL 159 FROM TRANQUILITY RIDGE
TO ST. JAMES RD.

LOCATION #1 EROSION CONTROL SCHEDULE

MI. STA. TO MI. STA.	OFFSET	LENGTH (FT)	WIDTH (FT)	SEEDING CL 2 (AC)	NITRO FERT NUTR (LBS)	PHOS FERT NUTR (LBS)	POTAS. FERT NUTR (LBS)	MULCH METHOD 2 (AC)
0.030 - 0.157	RT	670.56	3	0.05	4.5	4.5	4.5	0.05
0.162 - 0.257	RT	501.6	3	0.03	2.7	2.7	2.7	0.03
0.262 - 0.310	RT	253.44	3	0.02	1.8	1.8	1.8	0.02
0.030 - 0.310	LT	1478.4	3	0.10	9.0	9.0	9.0	0.10
TOTAL =				0.20	18.0	18.0	18.0	0.20

PLOT DATE = #DATE
PLOT SCALE = #SCALE
REFERENCE = #REF

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
**LOCATION #1 PLANS
AND DETAILS**
FAP 604 & 789
SECTION 103RS-1, 56RS-2
MADISON COUNTY

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY