


# TYPICAL PAVEMENT MARKINGS

## ARROW LAYOUT

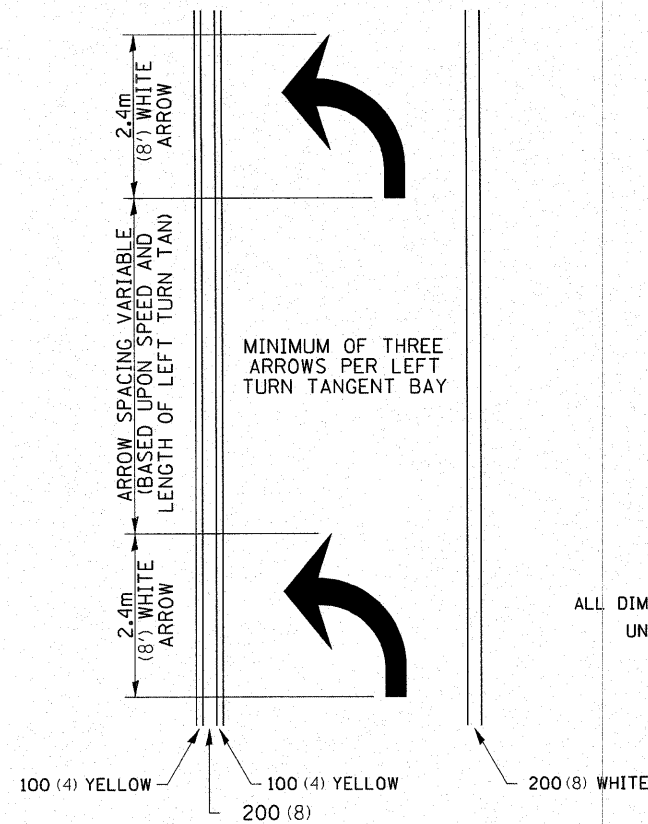


- ◀ ONE-WAY AMBER MARKER
- △ ONE-WAY CRYSTAL MARKER
- ◆ TWO-WAY AMBER MARKER

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

12.2m  
6 at (40') O.C.  
APPROACH SIDE ONLY


## TYPICAL PAVEMENT MARKING FOR FLUSH MEDIAN

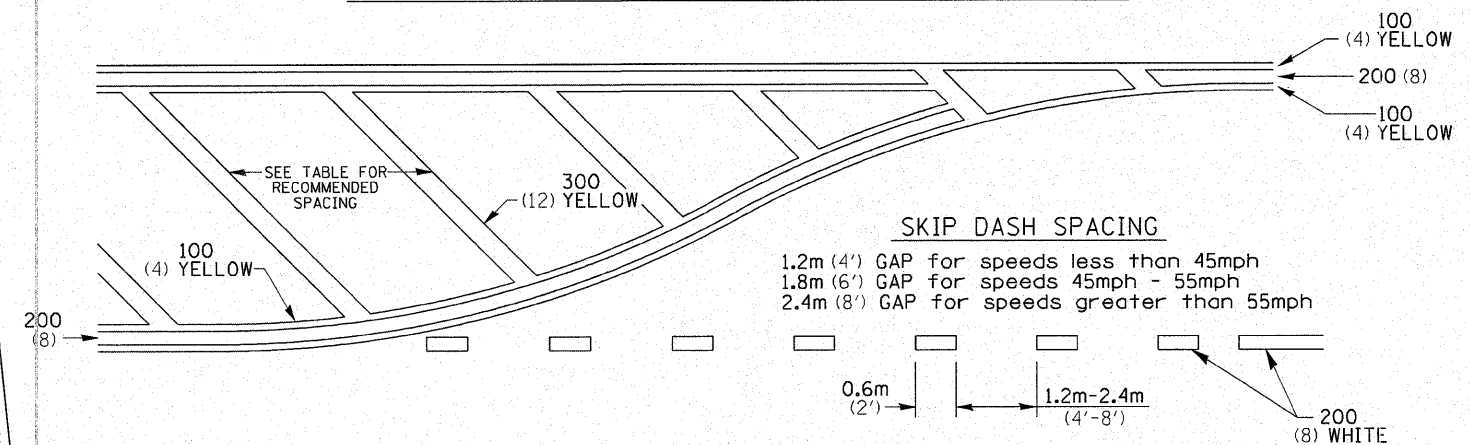

## RECOMMENDED SPACING BETWEEN DIAGONALS (IN FEET)

Speed Limit Range	Continuous Median Area	Intersection Channelization	Objects (Islands)
less than 50Km/H (30MPH)	15.3m (50')	4.53m (15')	3.05m (10')
50-60Km/H (30-40MPH)	22.9m (75')	6.1m (20')	4.53m (15')
70Km/H (45MPH) & over	22.9m (75')	9.05m (30')	6.1m (20')

NOTE: if the spacing recommended in the Table does not permit at least five diagonal lines in the area being marked, the spacing from the next lowest speed range should be used. The recommended spacing is measured parallel to the pavement center line.

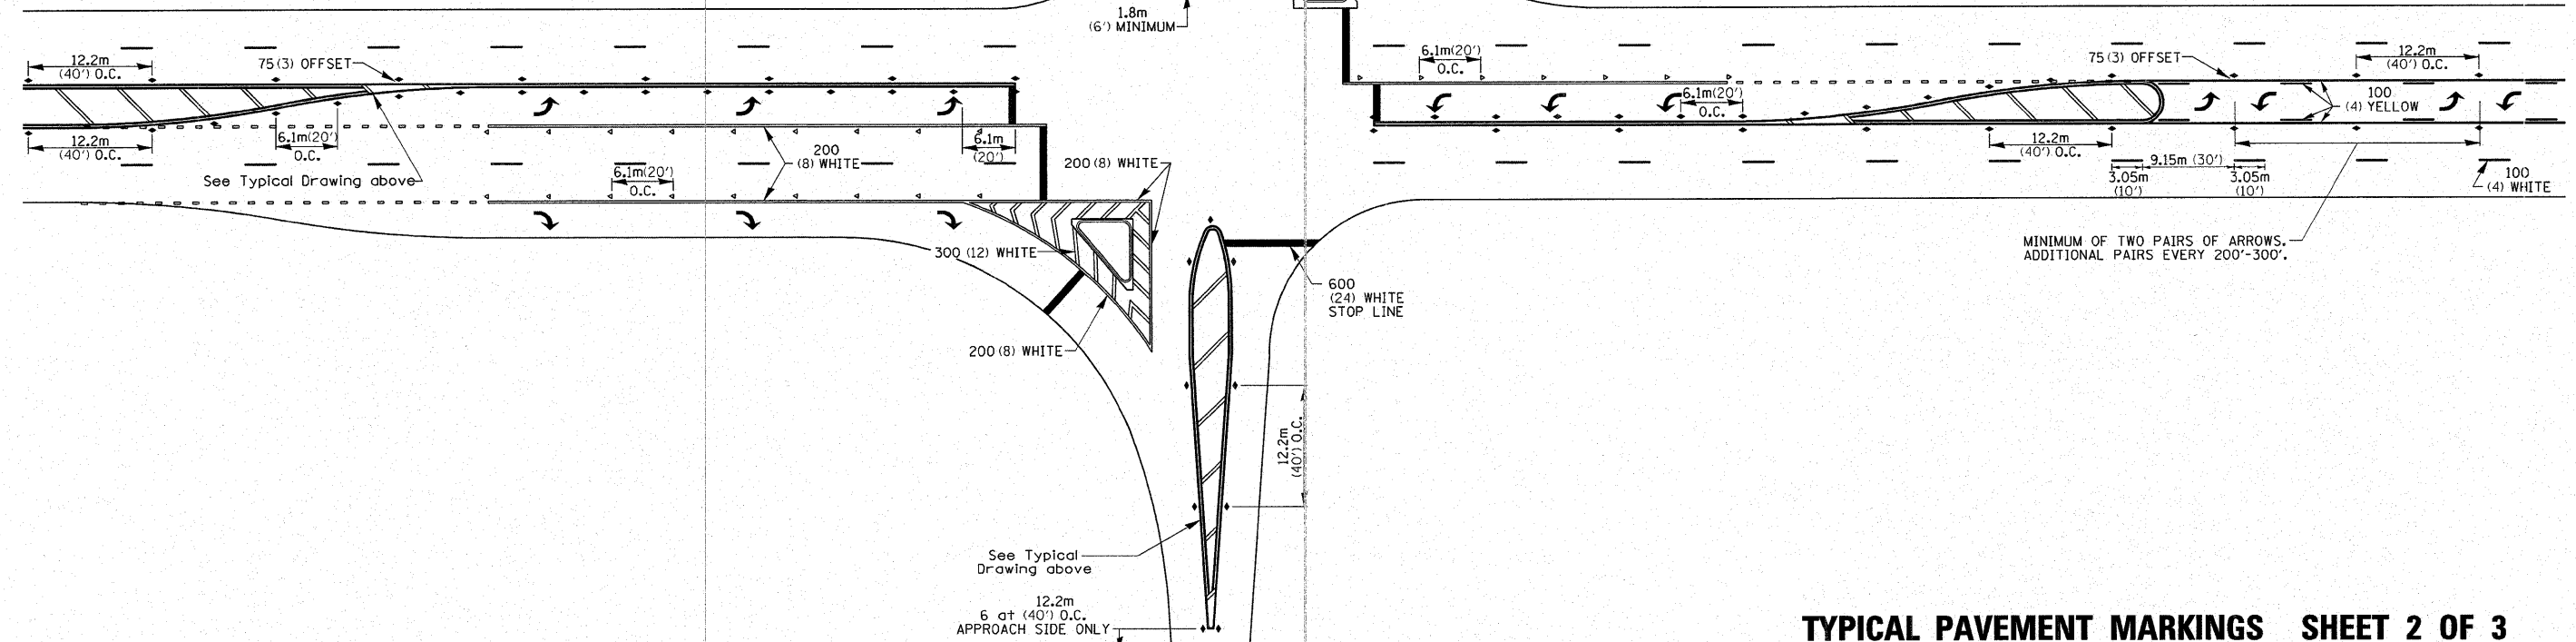

FILE NAME =	USER NAME = IDOTCAD	DESIGNED - SPF	REVISED - 10-21-08	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>REGION 2 / DISTRICT 2 STANDARD</b>		F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
W:\2298-03 - US 20 IL 84 Intersection\CAD Sheets\0208108-sht-details.dgn	DRAWN - AJP	REVIS	REVIS		SCALE: NONE	SHEET NO. 04 OF 10 SHEETS	STA.	TO STA.	301	30-M-2	JoDAVIESS	81	51
PLOT SCALE = 1:0000 "/ IN.	CHECKED - JMS	REVIS	REVIS						CONTRACT NO. 64E29				
PLOT DATE = 1/21/2009	DATE - 01/23/09	REVIS	REVIS						ILLINOIS FED. AID PROJECT				