


**TYPICAL M.S.E. WALL SECTION
AT ABUTMENT**

- * Piles shall be driven prior to placement of the reinforced select fill. An 18" ϕ pile liner shall be placed over the pile and the void between shall be backfilled with fine aggregate from the bottom of the select fill to the base of the abutment. The cost of the pile liner and fine aggregate backfill shall be included with the cost of Furnishing Piles.
- ** Overexcavation beyond structure excavation. This area not measured for payment. Backfill overexcavation with same material used for select fill used in MSE wall.
- *** The MSE Wall Supplier shall design the abutment soil reinforcement to resist a horizontal service force of 2.4 kips/foot of abutment.

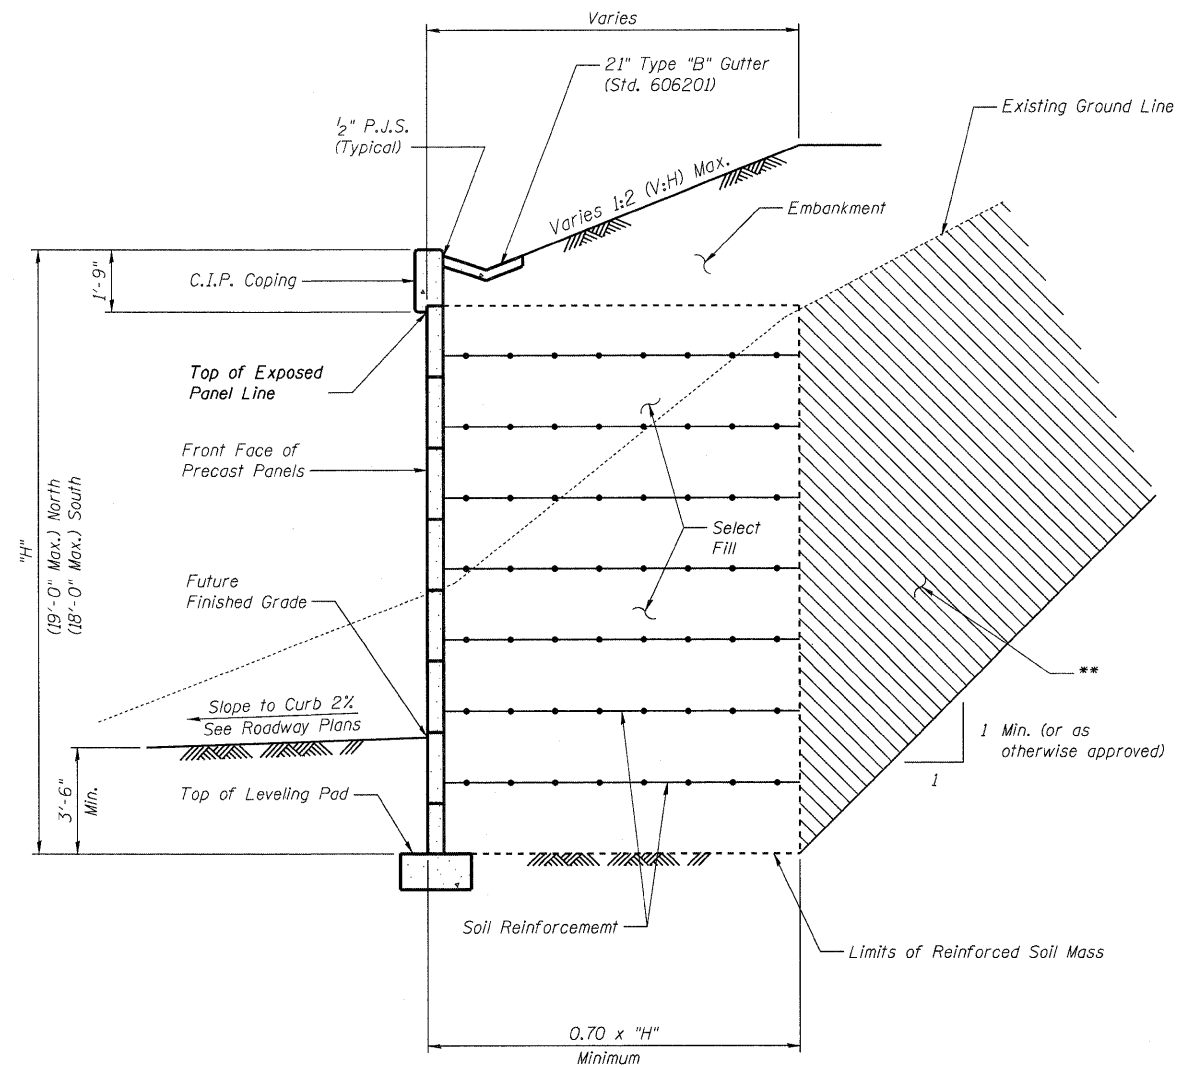

TYPICAL M.S.E. WALL SECTION