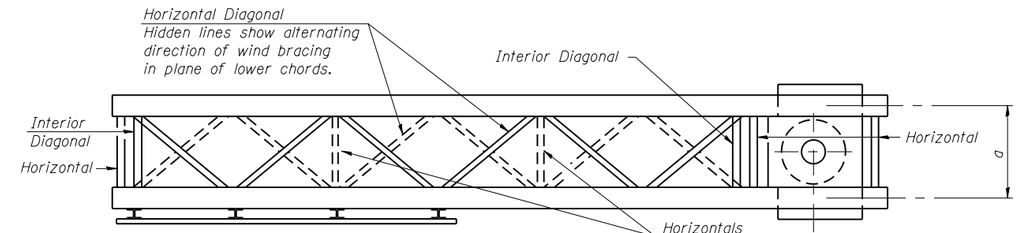

PLAN
(Walkway not shown)

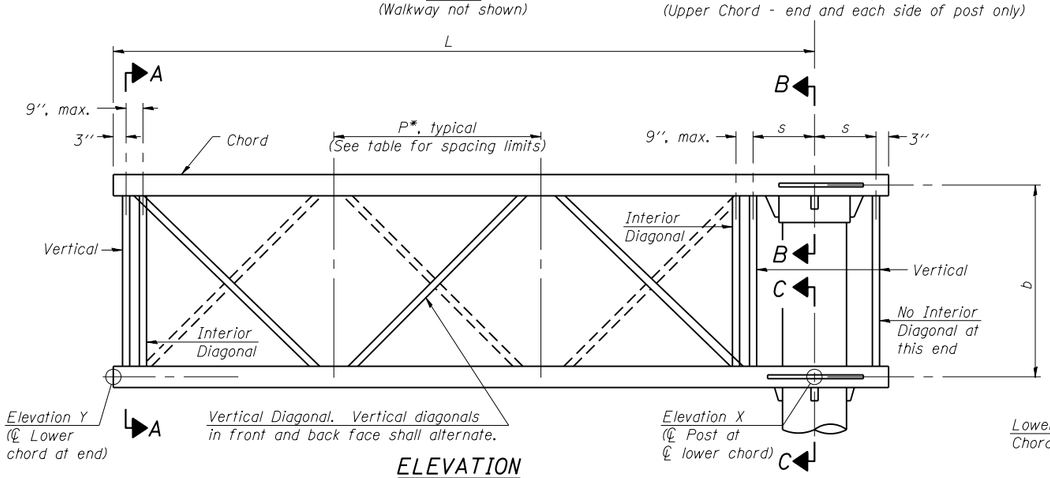

ELEVATION
(Sign and walkway omitted for clarity)

TYPICAL TRUSS UNIT
For Section B-B and Section C-C, see Base Sheet OSC-A-3.

Note:
There are twice as many horizontal diagonals as there are vertical diagonals.

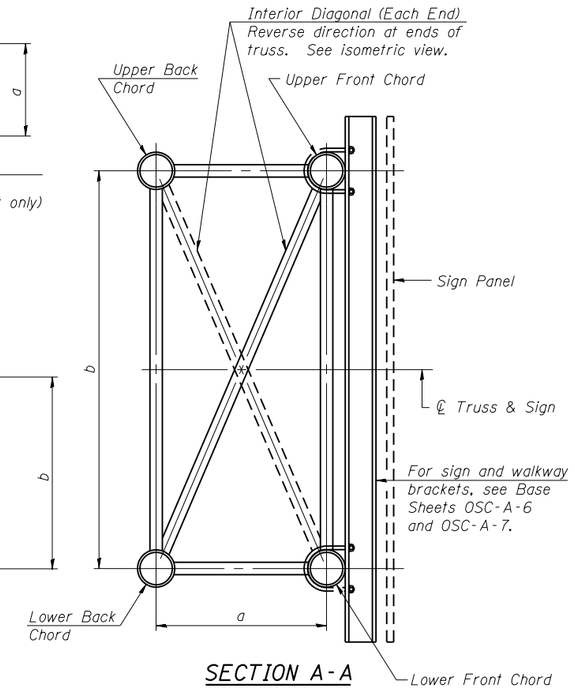

SECTION A-A



DETAIL A

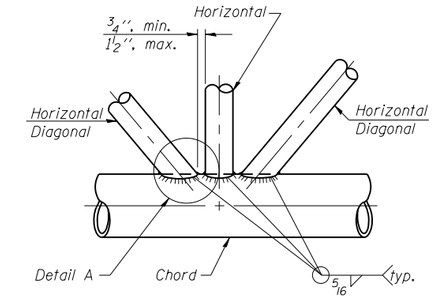

TRUSS INTERIOR JOINT DETAIL

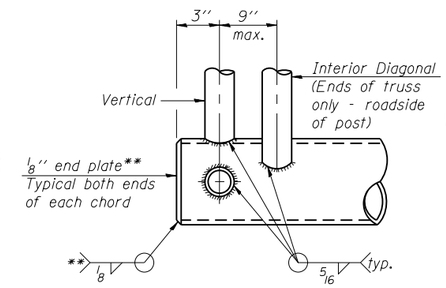

CANTILEVER END JOINT DETAIL
** Contractor may alternatively use standard aluminum drive-fit cap to close ends. 1/2'' ϕ Drain hole in end plate / drive-fit cap.

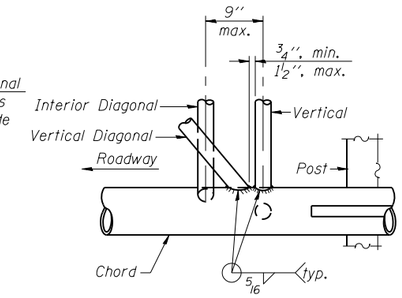

POST END JOINT DETAIL

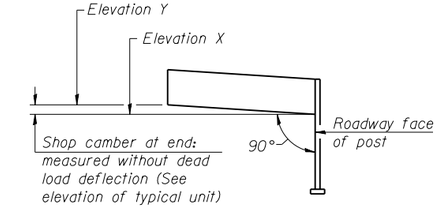

CAMBER DIAGRAM
(For Fabrication Only)

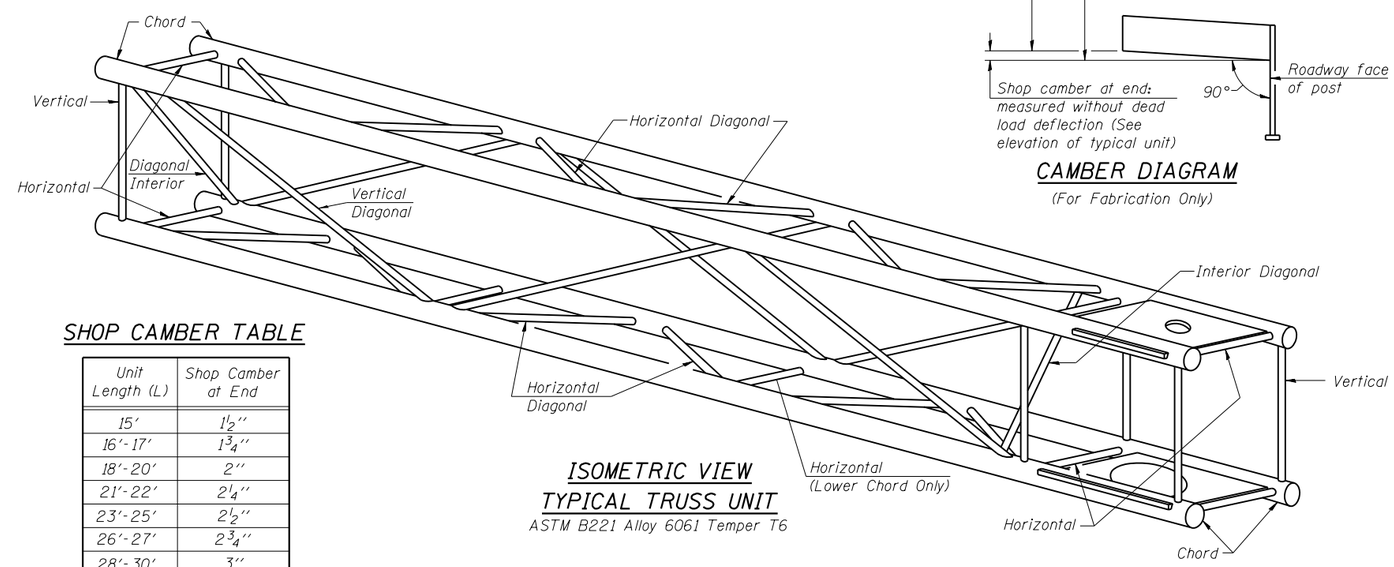

ISOMETRIC VIEW
TYPICAL TRUSS UNIT
ASTM B221 Alloy 6061 Temper T6

TRUSS UNIT TABLE

Truss Type	Dimension "a"	Dimension "b"	Dimension "s"	Limits for Panel Spacing (P)*	Up. & Low. Chord		Verticals; Horizontals; Vertical, Horizontal, and Interior Diagonals	
					O.D.	Wall	O.D.	Wall
I-C-A	24''	54''	16''	36'' min. to 48'' max.	5''	5/16''	2 1/2''	5/16''
II-C-A	36''	66''	21''	42'' min. to 54'' max.	6 1/2''	5/16''	3 1/4''	5/16''
III-C-A (35' Max.)	36''	84''	21''	48'' min. to 66'' max.	7''	3/8''	3 1/2''	3/8''
III-C-A (>35' to 40')	36''	84''	21''	48'' min. to 66'' max.	8''	3/8''	3 1/2''	3/8''

$$*P = \frac{L - s - 3''}{\#\ Panels}$$

Structure Number	Station	Truss Type	Design Length (L)	Number of Panels Per Unit	Panel Length (P)*
4C072S5006L005.53	61+01.00	I-C-A	18'-0"	5	39"

SHOP CAMBER TABLE

Unit Length (L)	Shop Camber at End
15'	1 1/2''
16'-17'	1 3/4''
18'-20'	2''
21'-22'	2 1/4''
23'-25'	2 1/2''
26'-27'	2 3/4''
28'-30'	3''
31'-32'	3 1/4''
33'-35'	3 1/2''
36'-37'	4''
38'-40'	4 1/2''

OSC-A-2 6-1-12