


\* Cut existing bars in the backwall 2'-3" above level concrete cut.

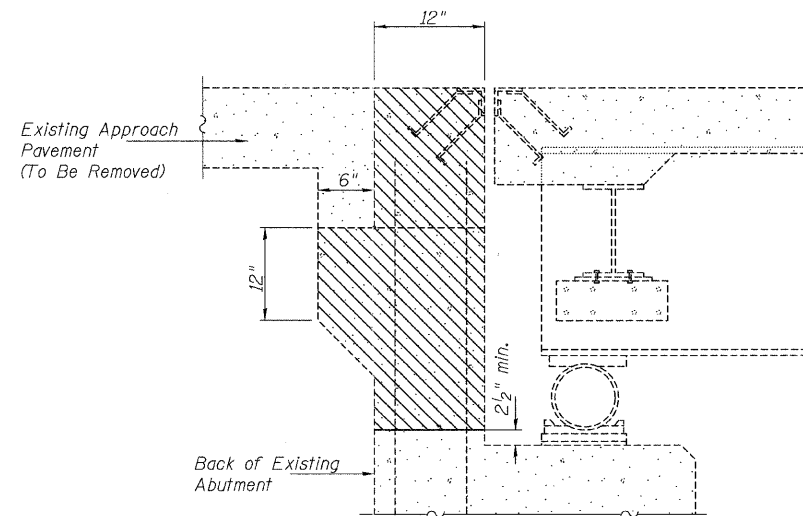

Notes:  
Existing vertical reinforcement shall be cleaned and incorporated into the new construction. Cost included with Concrete Removal.  
Hatched area indicates Concrete Removal.

**BILL OF MATERIAL**

Item	Unit	Quantity
Concrete Removal	Cu. Yd.	7.6

**SOUTH ABUTMENT CONCRETE REMOVAL  
JOLIET STREET (TR 851) OVER HICKORY CREEK  
SECTION 07-10117-00-BR  
WILL COUNTY  
STATION 9+97.55**

SHEET NO.	RTE. NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
20	TR 851	07-10117-00-BR	WILL	36	28
26 SHEETS			S.N. 099-3290	CONTRACT NO. 63642	
FED. ROAD DIST. NO. 7 ILLINOIS			FED. AID PROJECT BRS-		