



**NOTES**

- For additional steel details, see sheets 62 thru 67 of 113.
- AASHTO M270 grade 50 steel shall be used for all flange plates, web plates, bearing stiffeners, and jacking stiffeners.
- Load carrying components designated "NTR" shall conform to the Impact Testing Requirement, Zone 2.
- All cross frames between girders shall be installed with erection pins and bolts in accordance with the erection plan approved by the Engineer. Individual cross frames at supports may be temporarily disconnected to install bearing anchor rods.

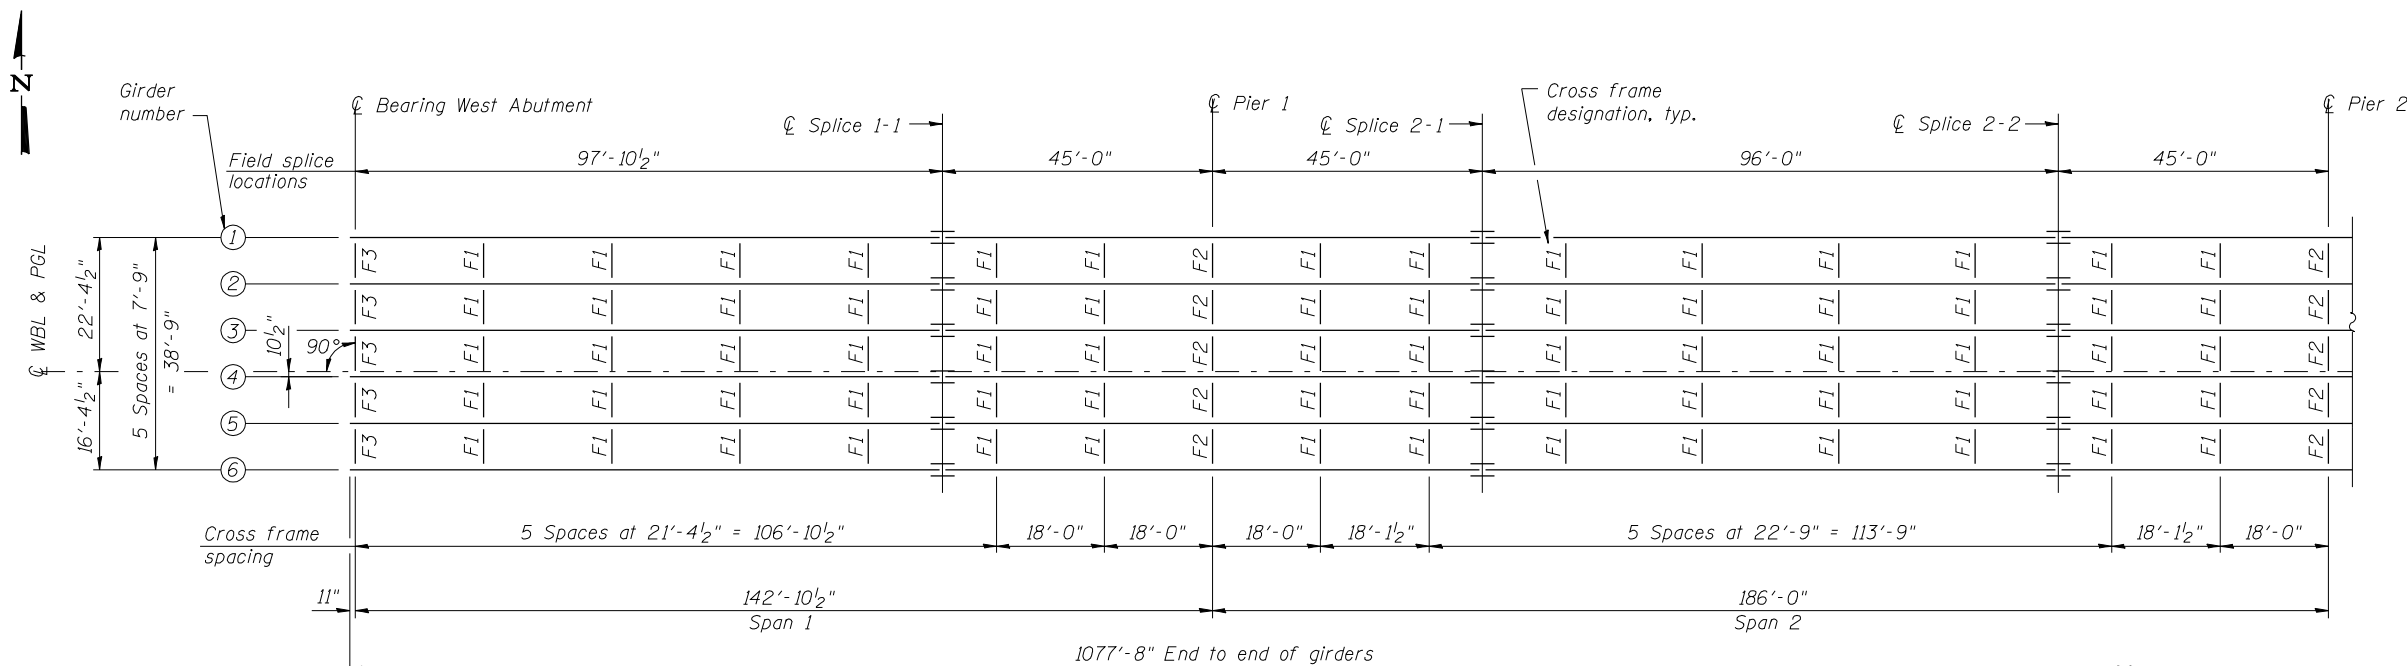

**FRAMING PLAN - SPANS 1 AND 2**

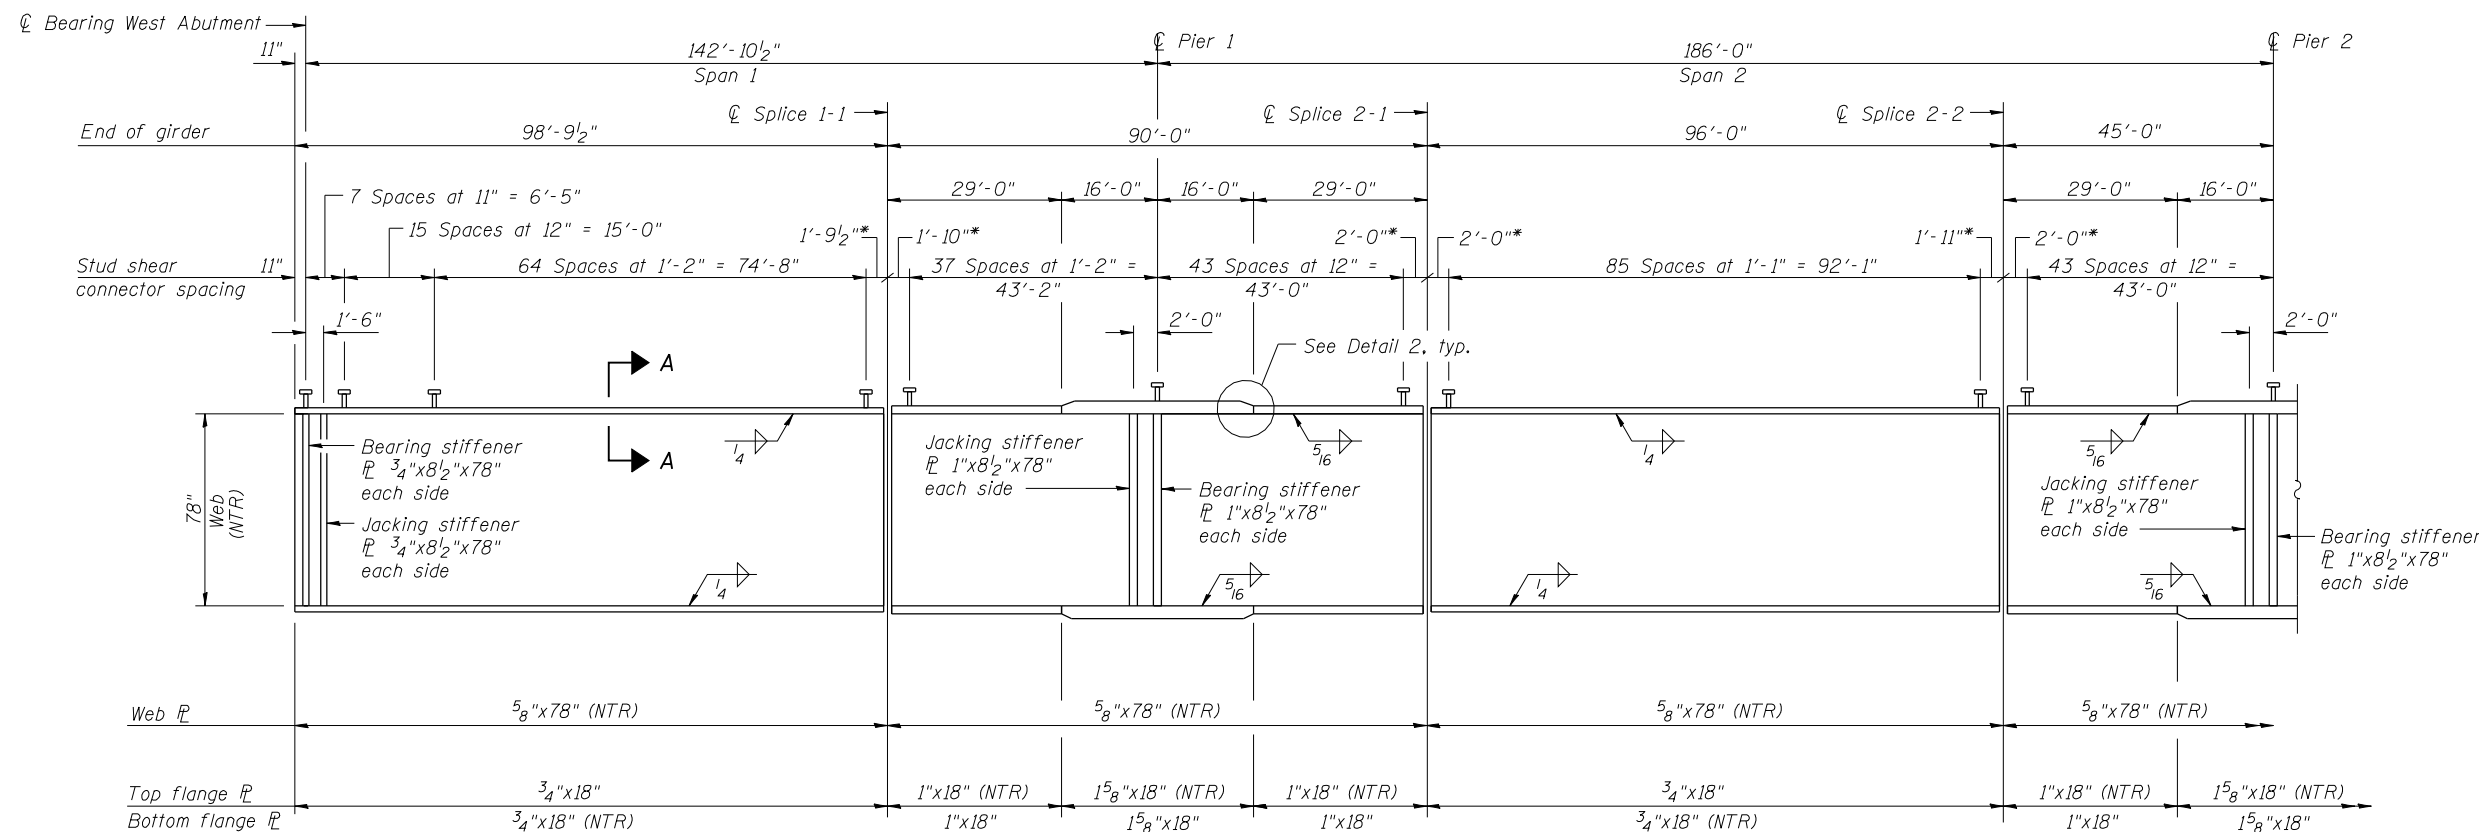

**GIRDER ELEVATION - SPANS 1 AND 2**

\*Omit shear connectors over splice



USER NAME = has	DESIGNED - ELH	08/13	REVISED -
ESCA PROJECT NO. 1070.09	CHECKED - RDP	08/13	REVISED -
PLOT DATE = 1/28/2014 11:19:24 PM	DRAWN - DWH	08/13	REVISED -
	CHECKED - ELH	08/13	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**STEEL FRAMING PLAN - WB  
STRUCTURE NO. 026-0106**

SHEET NO. 51 OF 113 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
70	(26-3B-1, 3B-1(3))BR	FAYETTE	277	131
CONTRACT NO. 74175				
ILLINOIS FED. AID PROJECT				