## INDEX OF SHEETS GENERAL PLAN


GENERAL NOTES, INDEX OF SHEETS, AND TOTAL B.O.M.

S1

*S2* 

## GENERAL NOTES

Fasteners shall be ASTM A325 Type 1, mechanically galvanized bolts. 1. Bolts -7/8 in.  $\phi$ , holes -15/16 in.  $\phi$ , unless otherwise noted.

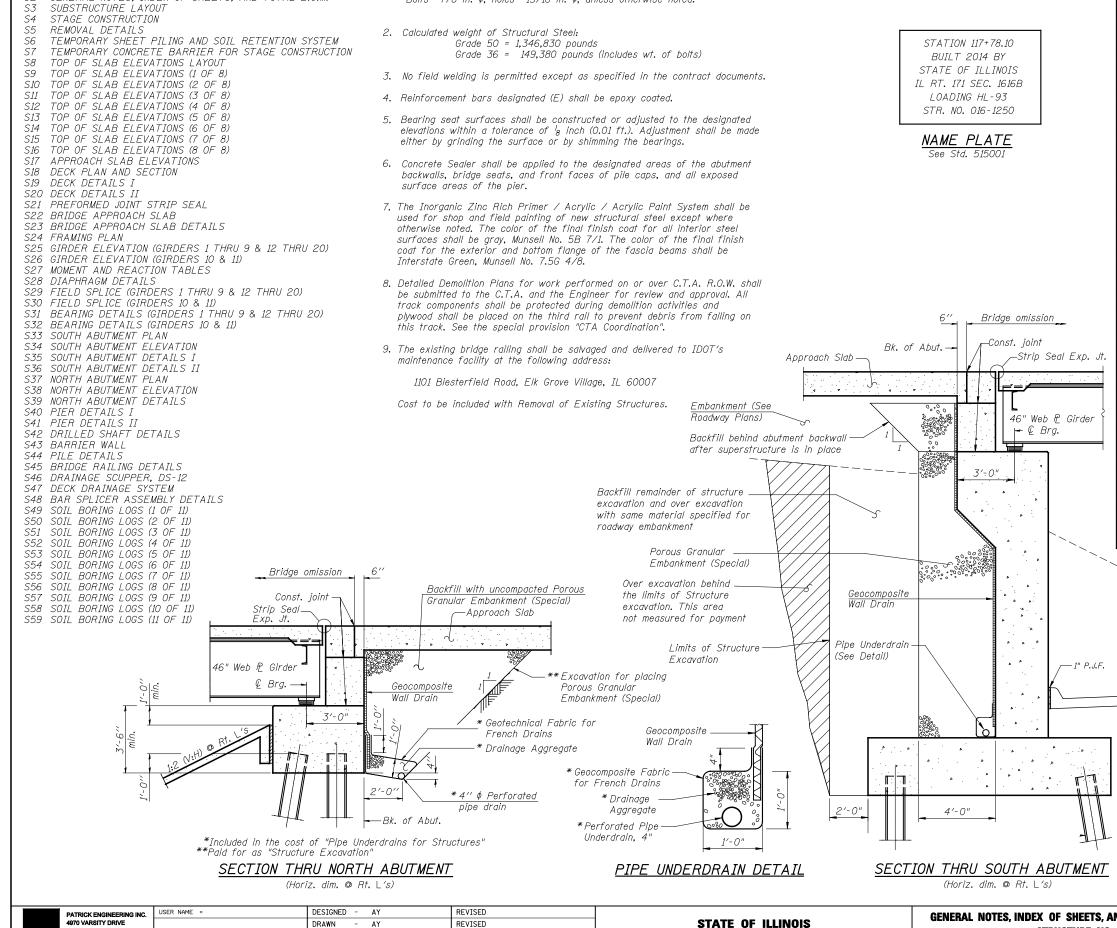

LISLE, IL 60532

LOT SCALE PLOT DATE = Q:\IDOT\21050\_006\_CumberlandAve\Drawings\CADD\_Sheets\D160J14-sht-tsl-GenNote.dg CHECKED

DATE

RLD

2/18/2013

REVISED

REVISED

**DEPARTMENT OF TRANSPORTATION** 

<u>TOTAL BILL OF MATERIAL</u>								
ITEM	UNIT	SUPER	SUB	TOTAL				
Removal of Existing Structures	EACH	1		1				
Slope Wall Removal	SQ YD		831	831				
Protective Shield	SQ YD	2,530		2,530				
Structure Excavation	CU YD		4,206	4,206				
Concrete Structures	CU YD		1,602.8	1,602.8				
Concrete Superstructure	CU YD	660.3		660.3				
Bridge Deck Grooving	SQ YD	4,176		4,176				
Concrete Encasement	CU YD		14.0	14.0				
Protective Coat	SQ YD	5,369		5,369				
Furnishing and Erecting Structural Steel	L SUM	1		1				
Stud Shear Connectors	EACH	22,500		22,500				
Reinforcement Bars, Epoxy Coated	POUND	351,280	259,290	610,570				
Bar Splicers	EACH	2,038	796	2,834				
Mechanical Splicers	EACH		504	504				
Bridge Fence Railing	FOOT	645		645				
Slope Wall 4"	SQ YD		562	562				
Furnishing Steel Piles, HP12x53	FOOT		7,308	7,308				
Driving Piles	FOOT		7,308	7,308				
Test Pile Steel, HP 12x53	EACH		4	4				
Name Plates	EACH	1		1				
Permanent Casing	FOOT		1,093	1,093				
Drilled Shaft In Soil	CU YD		389.5	389.5				
Drilled Shaft In Rock	CU YD		44.0	44.0				
Preformed Joint Strip Seal	FOOT	282		282				
Elastomeric Bearing Assembly, Type I	EACH	40		40				
Anchor Bolts, 1"	EACH	80		80				
Anchor Bolts, 1 1/2"	EACH	40		40				
Concrete Sealer	SQ FT		12,025	12,025				
Geocomposite Wall Drain	SQ YD		841	841				
Pile Extraction	EACH		96	96				
Barrier Wall Removal	FOOT		185	185				
Braced Excavation	CU YD		87	87				
Porous Granular Embankment, Special	CU YD		1,047	1,047				
Bridge Deck (Shrinkage Reducing Admixture)	CU YD	966.6		966.6				
Concrete Barrier Wall (Special)	FOOT		47	47				
Drainage Scuppers, DS-12	EACH	10		10				
Drainage System	L SUM	1		1				
Silicone Joint Sealer, 1"	FOOT	335		335				
Temporary Sheet Piling	SQ FT		1,248	1,248				
Pipe Underdrains For Structures, 4"	FOOT		430	430				
Temporary Soil Retention System	SQ FT		1,908	1,908				

Existing Ground Surface Temp. HMA Pavement (See Roadway Plans)

## NOTES:

STRUCTURE NO.

SHEET NO. S2 OF S5

SCALE: NONE

All drainage system components shall extend to 2'-O" from the end of each wingwall except an outlet pipe shall extend until intersecting with the side slopes. The pipe shall drain into concrete headwalls. See Article 601.05 of the Standard Specifications and Highway Standard 601101.

ND TOTAL BILL OF MATERIALS	F.A.U RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
. 016–1250		16168	COOK	404	271		
. 010-1230			CONTRACT	NO. 6	50J14		
59 SHEETS	ILLINOIS FED. AID PROJECT						