


Loop Splicing Requirements

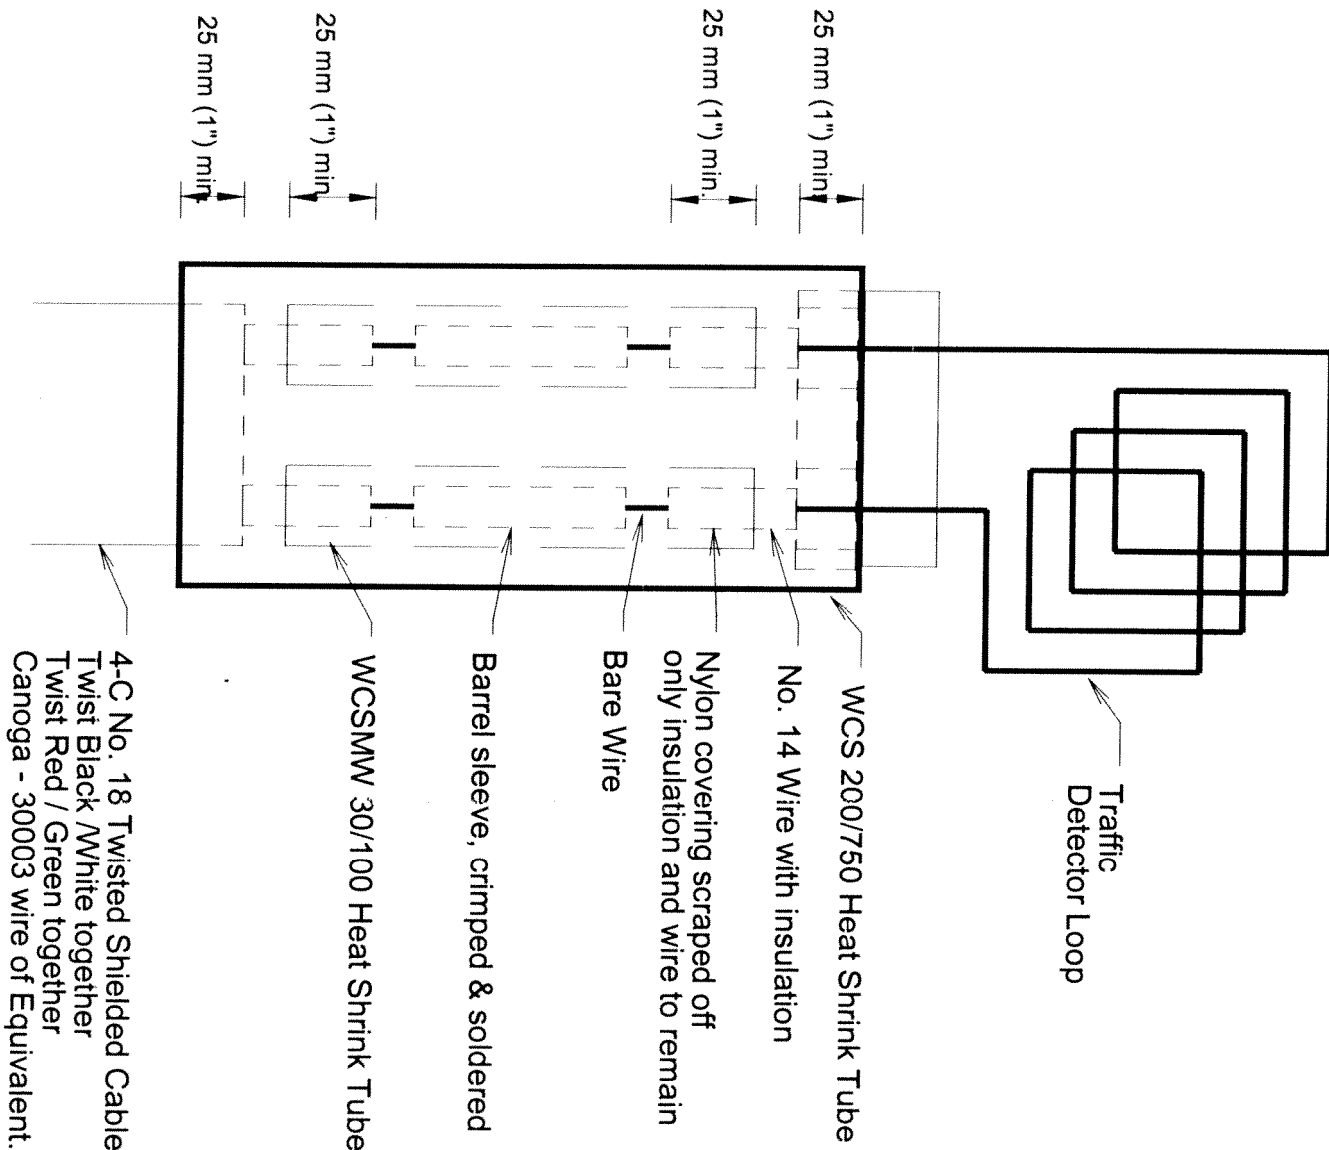

Minimum 25 mm (1") Heat Shrink Tube overlap on wire.
 PVC & Shielded cable to form water tight seal.

Note: Not to Scale

REVISIONS	
Name	Date

Illinois Department of Transportation
 Office of Planning and Programming

Drawn By:	Checked By:	Date:	Scale:
R. Taylor	R. Taylor	01/20/00	NONE