



SECTION A-A

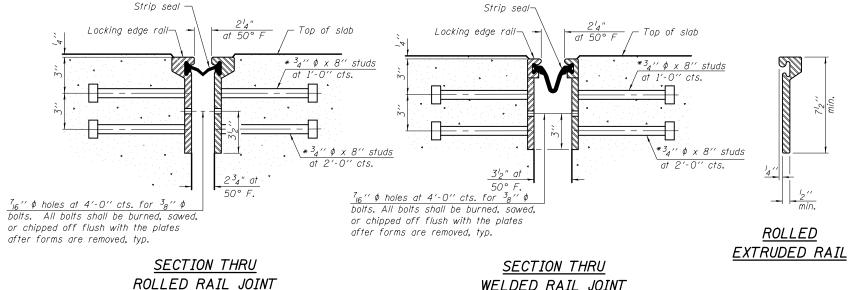

WELDED RAIL JOINT

* Granular or solid flux filled headed studs conforming to Article 1006.32 of the Std. Specs., automatically end welded.



WELDED RAIL

LOCKING EDGE RAIL SPLICE

The inside of the locking edge rail groove shall be free of weld residue.

is verified by mock-up.

Rolled rail shown, welded rail similar.

LOCKING EDGE RAILS

Notes:

The strip seal shall be made continuous and shall have a minimum thickness of ${}^{l}_{4}$ ". The configuration of the strip seal shall match the configuration of the Locking Edge Rails. Open or "webbed" strip seal gland configurations are not permitted. The gland shall be sized for a maximum rated movement of 4 inches.

The Locking Edge Rails depicted are conceptual only, except for the minimum dimensions shown. The actual configuration of the Locking Edge Rails and matching strip seal may vary from manufacturer to manufacturer. Flanged edge rails will not be allowed. Locking Edge Rails may be spliced at slope discontinuities.

The manufacturer's recommended installation methods shall be followed.

The joint opening and deck dimensions detailed on the superstructure are based on rolled rail expansion joint. If the Contractor elects to use the welded rail expansion joint, the opening and deck dimensions shall be modified according to the dimensions detailed on this sheet. Required modifications shall be made at no additional cost to the State.

All steel components shall be galvanized after fabrication according to Article 520.03 of the Standard Specifications.

Maximum space between rail segments shall be $^3{}_{l6}$ $^{\prime\prime}$, sealed with a suitable sealant. Joints in rails within 10 feet of curbs shall be welded.

BILL OF MATERIAL

Item	Unit	Total
Preformed Joint Strip Seal	Foot	81

BOWMAN, BARRETT & ASSOCIATES INC.
CONSULTING ENGINEERS
Chicago, Illinois
312,228,0100
www.bbandainc.com

7	USER NAME =	DESIGNED - IYL	REVISED -
l		CHECKED - BAK	REVISED -
l	PLOT SCALE =	DRAWN - MTR	REVISED -
1	PLOT DATE = 11/08/2012	CHECKED - IYL	REVISED -

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

	OINT STRIP SEAL NO. 016–2437
SHEET NO. S-3	1 OF S-83 SHEETS

SECTION COUNTY 2012-060-BR COOK 285 194 94 CONTRACT NO. 60V61