


GENERAL NOTES

1. ATTENUATOR BASE SHALL BE SLOPED TO DRAIN.
2. SLOPE ADJACENT TO ATTENUATOR BASE SHALL BE 10:1 OR FLATTER.
3. DETAILED LAYOUT INFORMATION PER STANDARD 643001-01.

APPROXIMATE LIMITS OF GRADING NEEDED TO PROVIDE APPROPRIATE PLATFORM ON APPROACH TO IMPACT ATTENUATOR. SOME MINOR GRADING MAY BE NEEDED OUTSIDE THESE LIMITS TO BLEND TO EXISTING GROUND.

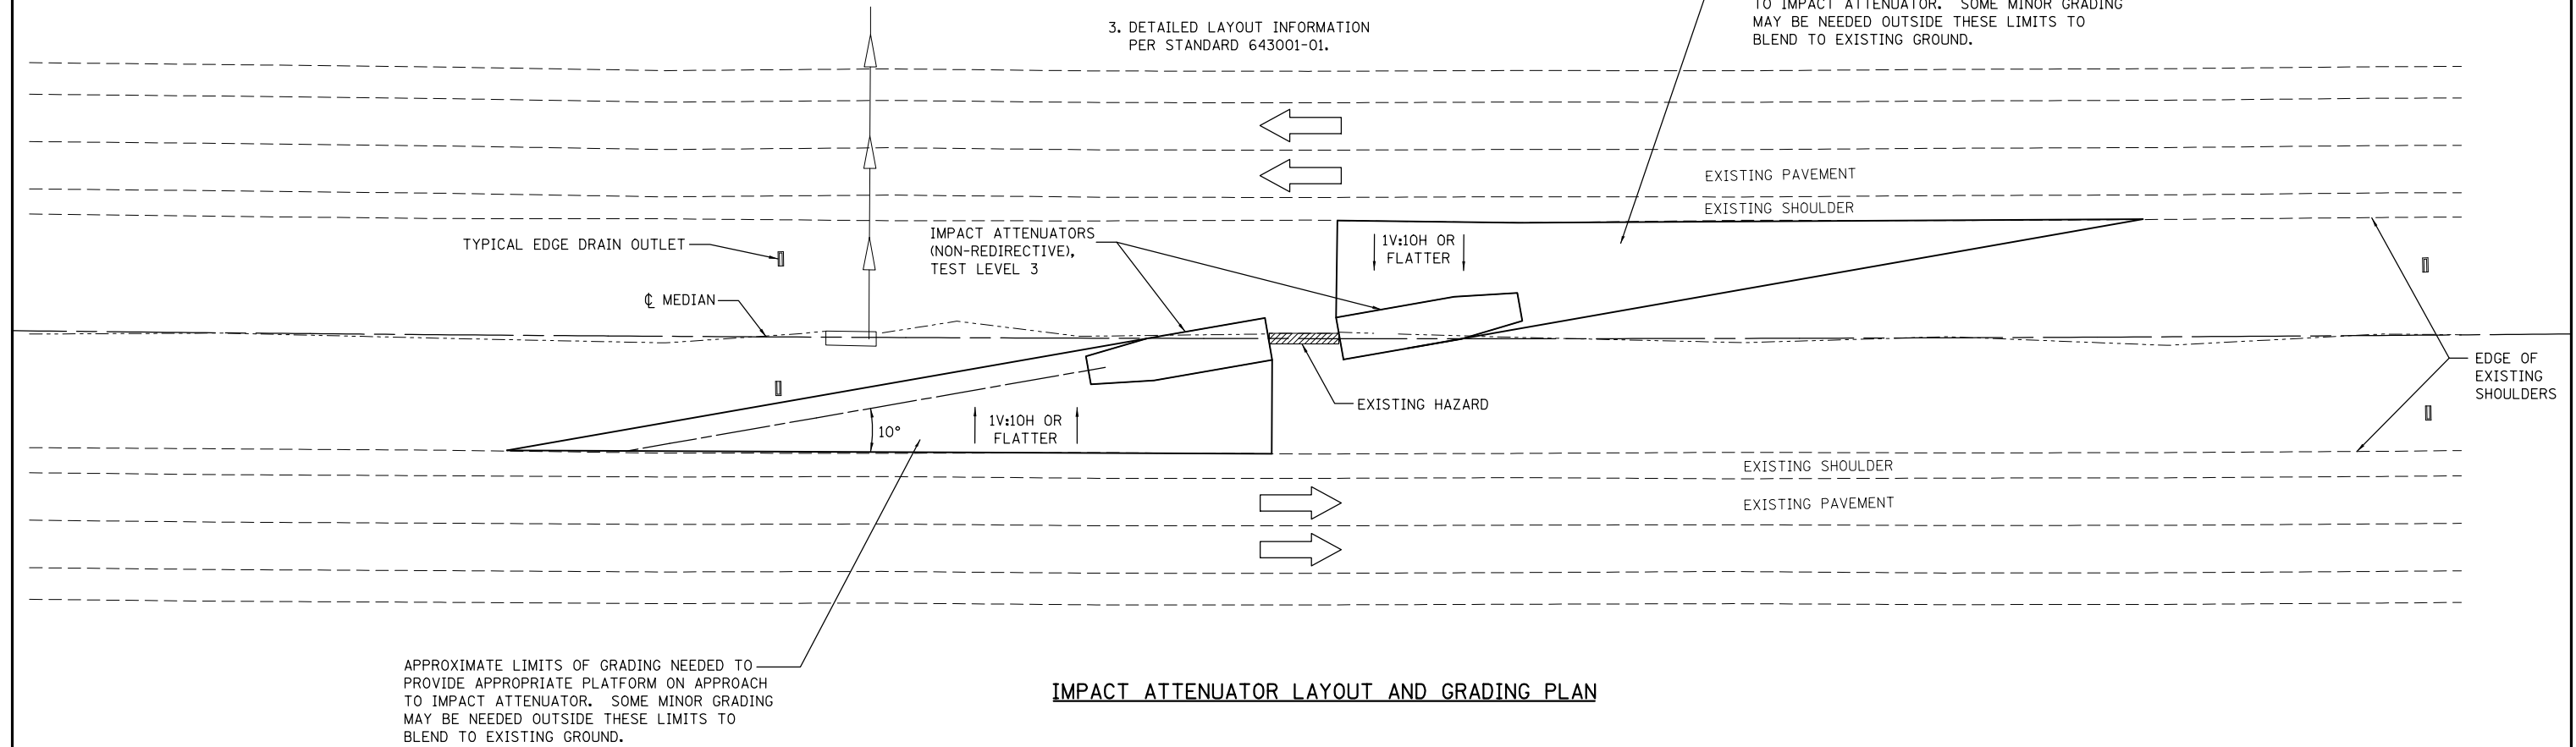

IMPACT ATTENUATOR LAYOUT AND GRADING PLAN

APPROXIMATE LIMITS OF GRADING NEEDED TO PROVIDE APPROPRIATE PLATFORM ON APPROACH TO IMPACT ATTENUATOR. SOME MINOR GRADING MAY BE NEEDED OUTSIDE THESE LIMITS TO BLEND TO EXISTING GROUND.

• VARIOUS
 **DIST 8 ATTENUATOR 2013-1

FILE NAME =	USER NAME = wedmorejb	DESIGNED -	REVISED -
cr:\pw\work\p\dot\wedmorejb\d0322728\d876g13-ah-plant.dgn		CHECKED -	REVISED -
	PLOT SCALE = 100.0010' / 1"	DRAWN -	REVISED -
	PLOT DATE = 2/8/2013	CHECKED -	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

IMPACT ATTENUATORS (NON-REDIRECTIVE) TEST LEVEL 3

SHEET NO. 1 OF 1 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	**	VARIOUS	16	15
CONTRACT NO. 76G13				
ILLINOIS FED. AID PROJECT				