SIGN DETAIL
1:75

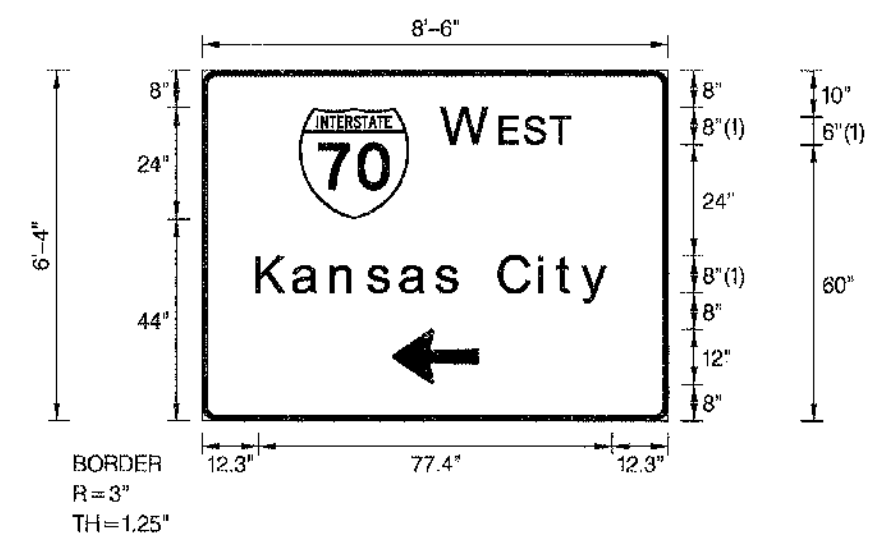

FONT:
(1) ClearviewHwy-5-W

Panel Style: guide_con_destination.ssi
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	GS1
WIDTH x HGHT.	8'-6" x 6'-4"
BORDER WIDTH	1.25"
CORNER RADIUS	3"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	21.2	44	24	24
ARMED	180	41.6	8	12	18.9

Panel Style: guide_con_destination.ssi
Dimensions are in inches.tenths

ZZ Sheeting shall be used for all green board details
Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

											LENGTH	SERIES/SIZE
W	E	S	T									ClearviewHwy-5-W
52.9	65.4	70.8	76.5								28	8,6
K	a	n	s	a	s		C	i	t	y		ClearviewHwy-5-W
12.3	20.3	28.7	36.7	43.8	51.7	56.8	65.5	74.2	78.1	83.5	77.4	8/6.5

LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois	USER NAME = Plotted by Scott Wilkinson	DESIGNED - ST	REVISED -
		DRAWN - AS	REVISED -
	PLOT SCALE = 50.0000 ' / IN.	CHECKED - ST	REVISED -
	PLOT DATE = 10/17/2011	DATE - 10/21/11	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
PROPOSED RELOCATED ILLINOIS ROUTE 3 INTERCHANGE

SIGNING DETAILS

SCALE: N/A | SHEET NO. 1 OF 7 SHEETS | STA. | TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
998	82-2-1K	ST. CLAIR	353	208
		CONTRACT NO. 76E06		

FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT