SIGN DETAIL

1:75

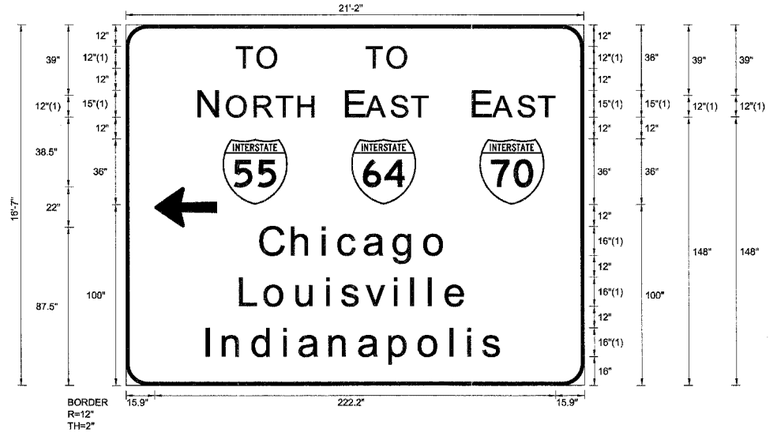

FONT:
(1) ClearviewHwy-5-W

Panel Style: guide_fwy_overhead.ssi
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	GS3
WIDTH x HGHT.	21'-2" x 16'-7"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	53.7	100	36	36
M1_1	0	125	100	36	36
M1_1	0	196.1	100	36	36
ARMED	180	15.9	87.5	22	34.7

Panel Style: guide_fwy_overhead.ssi
Dimensions are in inches.tenths

ZZ Sheeting shall be used for all green board details
Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																LENGTH	SERIES-SIZE
T	O																																ClearviewHwy-5-W
61.8	73.6																															22.9	12
T	O																																ClearviewHwy-5-W
133.9	145.6																															22.9	12
N	O	R	T	H																													ClearviewHwy-5-W
41.2	56.6	72.1	84	96.2																												64.2	15,12
E	A	S	T																														ClearviewHwy-5-W
122.9	134	147.7	159.1																													44.9	15,12
E	A	S	T																														ClearviewHwy-5-W
193.2	204.3	218.1	229.5																													44.9	15,12
C	h	i	c	a	g	o																											ClearviewHwy-5-W
75.4	93.1	109.9	118.7	133.2	149.5	166.6																										103.5	16|3
L	o	u	i	s	v	i	l	l	e																								ClearviewHwy-5-W
64.2	77.9	95.6	112.2	120.4	133.8	149.8	159.2	169	178.2																							125.7	16|3
I	n	d	i	a	n	a	p	o	l	i	s																						ClearviewHwy-5-W
45.3	54.7	71.2	88.5	96.9	113.9	130	146.9	163.3	181	190.5	198.7																					163.6	16|3

$$$$prof_list_name$$$$
$$$$data_time$$$$ $$user$$ $$$$sign_name$$$$

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois
Westmont, Illinois

USER NAME = Plotted by Scott Wilkinson	DESIGNED - ST	REVISED -
	DRAWN - AS	REVISED -
PLOT SCALE = 50.0000 ' / IN.	CHECKED - ST	REVISED -
PLOT DATE = 10/17/2011	DATE - 10/21/11	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
PROPOSED RELOCATED ILLINOIS ROUTE 3 INTERCHANGE

SIGNING DETAILS

SCALE: N/A | SHEET NO. 3 OF 7 SHEETS | STA. | TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
998	82-2-1K	ST. CLAIR	353	210
		CONTRACT NO. 76E06		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		