


## PAVEMENT MARKING LEGENDS

—————	SOLID LINE
=====	DOUBLE CENTERLINE
- - - - -	SKIP-DASH WHITE
- - - - -	SKIP-DASH YELLOW
—————	STOP LINE
◆	RAISED REFLECTIVE PAVEMENT MARKER, TWO-WAY AMBER
↷	TURN ARROW, 8'
X	RAILROAD-HIGHWAY GRADE CROSSINGS

## PAVEMENT MARKING GENERAL NOTES

1. ALL DIAGONAL LINES ARE 12" AT 30' CENTERS, MINIMUM OF 5 DIAGONAL LINES PER SEPARATE AREA.
2. ALL TURN ARROWS ARE 8' HIGH.
3. REFERENCE ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT 6 PAVEMENT MARKING STANDARDS FOR DETAILS NOT SHOWN.
4. "NO PASSING ZONES" ARE TO BE FIELD VERIFIED BY THE BUREAU OF OPERATIONS. THE RESIDENT ENGINEER SHALL NOTIFY THE BUREAU OF OPERATIONS 14 DAYS PRIOR TO PERMANENT PAVEMENT MARKINGS.

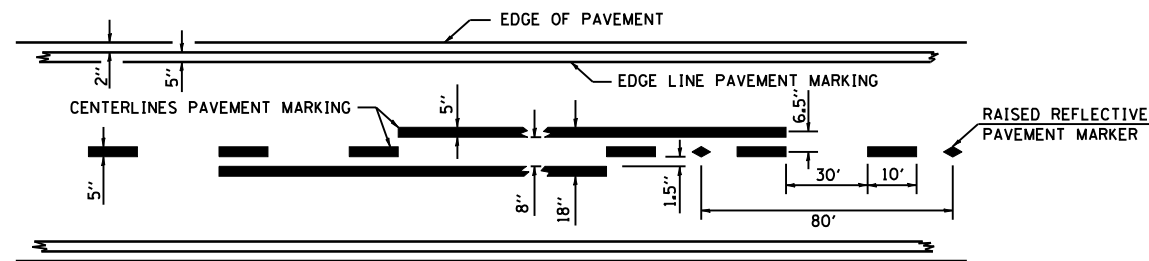

TYPICAL APPLICATION

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
		PR. PAVEMENT MARKING LEGENDS, GENERAL NOTES & TYPICAL APPLICATION

SCALE: NONE  
DATE: 2/8/2006

DRAWN BY: SGL  
CHECKED BY: JH