

RIPRAP SCHEDULE			
LOCATION	STONE RIPRAP, CLASS A3	STONE RIPRAP, CLASS A4	FILTER FABRIC FOR USE W/ RIPRAP
MAINLINE	TON	SQ YD	SQ YD
LT/RT STA. 1014+75 TO 1015+00	22.8		33.2
LT/RT STA. 1014+00 TO 1014+35	31.8		46.6
LT/RT STA. 1014+35 TO 1014+74		156	156
DETOUR/STAGING(VAR. LOCATIONS)	20		31
TOTAL	75	156	266

MOBILIZATION	
LOCATION	L SUM
STA 1008+50 TO 1020+50	1
TOTAL	1

PERMANENT SURVEY TIES	
LOCATION	EACH
RT. STA. 1014+87	2
LT. STA. 1014+87	2
TOTAL	4

TRAFFIC CONTROL AND PROTECTION, STD. 701331	
LOCATION	EACH
PROJECT LIMITS	
STA 1008+50 - 1020+50	1
TOTAL	1


PERMANENT SURVEY MARKERS, TYPE I	
LOCATION	EACH
STA. 1014+87.29 4.1' RT.	1
TOTAL	1

ENGINEER'S FIELD OFFICE, TY A	
LOCATION	CAL MO
PROJECT LIMITS	
STA. 1008+50 TO 1020+50	6
TOTAL	6

AGGREGATE SHOULDER, TY. B	
LOCATION	TON
MAINLINE	
LT & RT STA 1008+50 TO 1020+50	364.8
RUN-A-ROUND	
RT STA 2+54 TO 10+46.49	89.6
LT STA 0+00 TO 12+87.56	146.6
TOTAL	601.0

TRAFFIC CONTROL AND PROTECTION, STD. 701306	
LOCATION	L SUM
PROJECT LIMITS	
STA 1008+50 TO 1020+50	1
TOTAL	1

SUB-BASE GRANULAR MATERIAL, TY. B (VARIABLE DEPTH)	
LOCATION	TON
MAINLINE	
STA 1010+80 TO 1011+45	63.9
STA 1016+20 TO 1016+95	73.7
TOTAL	138

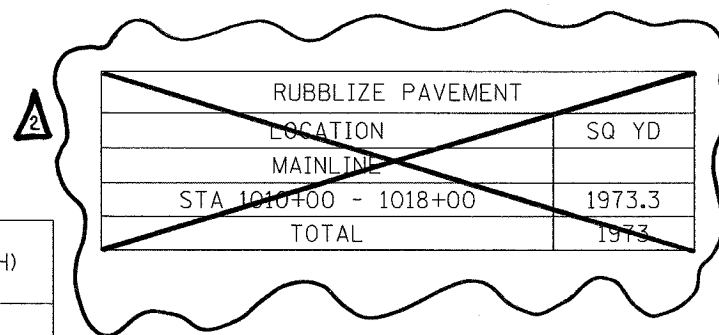

SUB-BASE GRANULAR MATERIAL, TY. B, 12"	
LOCATION	SQ YD
MAINLINE	
STA 1011+45 TO 1016+20	1170.0
TOTAL	1170

TRAFFIC CONTROL AND PROTECTION, STD. 701326	
LOCATION	L SUM
PROJECT LIMITS	
STA 1008+50 TO 1020+50	1
TOTAL	1

GUARDRAIL SCHEDULE							
LOCATION	TRAFFIC BARRIER TERM. TY. 1, SPECIAL (TANGENT)	SPBGR ATTACHED TO STRUCTURE	TEMP. SPBGR TY. A	SPBGR REMOVAL	TRAFFIC BARRIER TERM. TY. 1 REMOVAL 50'	GUARDRAIL MARKERS	TERMINAL MARKER DIRECT APPLIED
RUN-A-ROUND	EACH	FOOT	FOOT	FOOT	EACH	EACH	EACH
STA 5+60.1 TO 6+10.1 LT	1				1		1
STA 6+10.1 TO 6+85.1 LT			75	75		8	
STA 6+85.1 TO 7+00.7 LT		15.6		15.6			
STA 7+00.7 TO 8+00.7 LT			100	100			
STA 8+00.7 TO 8+50.7 LT	1				1		1
STA 5+97.0 TO 6+47.0 RT	1				1	5	1
STA 6+47.0 TO 6+72.0 RT			25	25			
STA 6+72.0 TO 6+87.6 RT		15.6		15.6			
STA 6+87.6 TO 7+12.6 RT			25	25			
STA 7+12.6 TO 7+62.6 RT	1				1		1
MAINLINE							
STA 1013+86 TO 1015+39 LT				153			
STA 1013+63 TO 1015+16 RT				153			
TOTAL	4	31	225	562	4	13	4

FURNISHING & ERECTING R.O.W. MARKERS			
LOCATION	OFFSET	EACH	
A	STA 1009+00	30' & 45' LT	2
B	STA 1012+00	45' LT	1
C	STA 1014+00	77' LT	1
D	STA 1015+00	77' LT	1
E	STA 1016+00	50' LT	1
F	STA 1019+00	30' & 50' LT	2
G	STA 1009+00	30' & 40' RT	2
H	STA 1012+00	40' RT	1
I	STA 1014+00	77' RT	1
J	STA 1015+00	77' RT	1
K	STA 1016+00	50' RT	1
L	STA 1019+00	30' & 50' RT	2
TOTAL			16

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCHEDULE OF QUANTITIES

SCALE: VERT. DATE HORIZ. DATE

DRAWN BY CHECKED BY