If you plan to submit a bid directly to the Department of Transportation

PREQUALIFICATION

Any contractor who desires to become pre-qualified to bid on work advertised by IDOT must submit the properly completed pre-qualification forms to the Bureau of Construction no later that 4:30 p.m. prevailing time twenty-one days prior to the letting of interest. This pre-qualification requirement applies to first time contractors, contractors renewing expired ratings, contractors maintaining continuous pre-qualification or contractors requesting revised ratings. To be eligible to bid, existing pre-qualification ratings must be effective through the date of letting.

REQUESTS FOR AUTHORIZATION TO BID

Contractors downloading and/or ordering CD-ROM's and are wanting to bid on items included in a particular letting must submit the properly completed "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) and the ORIGINAL, signed and notarized, "Affidavit of Availability" (BC 57) to the proper office no later than 4:30 p.m. prevailing time, three (3) days prior to the letting date.

WHO CAN BID?

Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction.

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID? When a prospective prime bidder submits a "Request for Authorization to Bid/or Not For Bid Status" (BDE 124INT) he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a Proposal Denial and/or Authorization Form, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If Authorization to Bid cannot be approved, the Proposal Denial and/or Authorization Form will indicate the reason for denial.

ABOUT AUTHORIZATION TO BID: Firms that have not received an authorization form within a reasonable time of complete and correct original document submittal should contact the department as to status. This is critical in the week before the letting. These documents must be received three days before the letting date. Firms unsure as to authorization status should call the Prequalification Section of the Bureau of Construction at the number listed at the end of these instructions.

ADDENDA AND REVISIONS: It is the contractor's responsibility to determine which, if any, addenda or revisions pertain to any project they may be bidding. Failure to incorporate all relevant addenda or revisions may cause the bid to be declared unacceptable.

Each addendum will be placed with the contract number. Addenda and revisions will also be placed on the Addendum/Revision Checklist and each subscription service subscriber will be notified by e-mail of each addendum and revision issued.

The Internet is the Department's primary way of doing business. The subscription server e-mails are an added courtesy the Department provides. It is suggested that bidder check IDOT's website http://www.dot.il.gov/desenv/delett.html before submitting final bid information.

IDOT is not responsible for any e-mail related failures.

Addenda Questions may be directed to the Contracts Office at (217)782-7806 or D&Econtracts@dot.il.gov

Technical Questions about downloading these files may be directed to Tim Garman (217)524-1642 or garmantr@dot.il.gov.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	(217)782-3413
Preparation and submittal of bids	(217)782-7806
Mailing of plans and proposals	(217)782-7806
Electronic plans and proposals	(217)524-1642

ADDENDUMS AND REVISIONS TO THE PROPOSAL FORMS

Planholders should verify that they have received and incorporated the addendum and/or revision prior to submitting their bid. Failure by the bidder to include an addendum could result in a bid being rejected as irregular.

91

KETOKK WITH BID
Proposal Submitted By
Name
Address
City

Letting April 29, 2005

NOTICE TO PROSPECTIVE BIDDERS

This proposal can be used for bidding purposes by only those companies that request and receive written AUTHORIZATION TO BID from IDOT's Central Bureau of Construction. (SEE INSTRUCTIONS ON THE INSIDE OF COVER)

Notice To Bidders, Specifications, Proposal, Contract and Contract Bond



Springfield, Illinois 62764

Contract No. 74068
JEFFERSON County
Section D-7 PAVT PATCHING 2005-3
District 7 Construction Funds
Route FAI 57

PLEASE MARK THE APPROPRIATE BOX BELOW:	
☐ A <u>Bid</u> <u>Bond</u> is included.	
A Cashier's Check or a Certified Check is included.	

Plans Included Herein

Prepared by

S

Checked by

Printed by authority of the State of Illinois)

BIDDERS NEED NOT RETURN THE ENTIRE PROPOSAL (See instructions inside front cover)

INSTRUCTIONS

ABOUT IDOT PROPOSALS: All proposals issued by IDOT are potential bidding proposals. Each proposal contains all Certifications and Affidavits, a Proposal Signature Sheet and a Proposal Bid Bond required for Prime Contractors to submit a bid after written **Authorization to Bid** has been issued by IDOT's Central Bureau of Construction.

WHO CAN BID?: Bids will be accepted from only those companies that request and receive written **Authorization to Bid** from IDOT's Central Bureau of Construction. To request authorization, a potential bidder <u>must complete and submit Part B of the Request for Authorization to Bid/or Not For Bid Status form (BDE 124 INT) and submit an original Affidavit of Availability (BC 57).</u>

WHAT CONSTITUTES WRITTEN AUTHORIZATION TO BID?: When a prospective prime bidder submits a "Request for Proposal Forms and Plans" he/she must indicate at that time which items are being requested For Bidding purposes. Only those items requested For Bidding will be analyzed. After the request has been analyzed, the bidder will be issued a Proposal Denial and/or Authorization Form, approved by the Central Bureau of Construction, that indicates which items have been approved For Bidding. If Authorization to Bid cannot be approved, the Proposal Denial and/or Authorization Form will indicate the reason for denial. If a contractor has requested to bid but has not received a Proposal Denial and/or Authorization Form, they should contact the Central Bureau of Construction in advance of the letting date.

WHAT MUST BE INCLUDED WHEN BIDS ARE SUBMITTED?: Bidders need not return the entire proposal when bids are submitted. That portion of the proposal that must be returned includes the following:

- 1. All documents from the Proposal Cover Sheet through the Proposal Bid Bond
- 2. Other special documentation and/or information that may be required by the contract special provisions

All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed by IDOT personnel.

ABOUT SUBMITTING BIDS: It is recommended that bidders deliver bids in person to insure they arrive at the proper location prior to the time specified for the receipt of bids. Any bid received at the place of letting after the time specified will not be accepted.

WHO SHOULD BE CALLED IF ASSISTANCE IS NEEDED?

Questions Regarding	Call
Prequalification and/or Authorization to Bid	217/782-3413
Preparation and submittal of bids	217/782-7806
Mailing of CD-ROMS	217/782-7806



Route FAI 57

PROPOSAL

TO THE DEPARTMENT OF TRANSPORTATION

District 7 Construction Funds

1.	Proposal of
	·
	for the improvement identified and advertised for bids in the Invitation for Bids as:
	Contract No. 74068 JEFFERSON County Section D-7 PAVT PATCHING 2005-3

Pavement patching along I-57/64 at various locations at Mount Vernon.

2. The undersigned bidder will furnish all labor, material and equipment to complete the above described project in a good and workmanlike manner as provided in the contract documents provided by the Department of Transportation. This proposal will become part of the contract and the terms and conditions contained in the contract documents shall govern performance and payments.

BD 353A (Rev. 11/2001)

- 3. ASSURANCE OF EXAMINATION AND INSPECTION/WAIVER. The undersigned further declares that he/she has carefully examined the proposal, plans, specifications, form of contract and contract bond, and special provisions, and that he/she has inspected in detail the site of the proposed work, and that he/she has familiarized themselves with all of the local conditions affecting the contract and the detailed requirements of construction, and understands that in making this proposal he/she waives all right to plead any misunderstanding regarding the same.
- 4. **EXECUTION OF CONTRACT AND CONTRACT BOND.** The undersigned further agrees to execute a contract for this work and present the same to the department within fifteen (15) days after the contract has been mailed to him/her. The undersigned further agrees that he/she and his/her surety will execute and present within fifteen (15) days after the contract has been mailed to him/her contract bond satisfactory to and in the form prescribed by the Department of Transportation, in the penal sum of the full amount of the contract, guaranteeing the faithful performance of the work in accordance with the terms of the contract.
- 5. **PROPOSAL GUARANTY.** Accompanying this proposal is either a bid bond on the department form, executed by a corporate surety company satisfactory to the department, or a proposal guaranty check consisting of a bank cashier's check or a properly certified check for not less than 5 per cent of the amount bid or for the amount specified in the following schedule:

	Amount o	of Bid	Proposal <u>Guaranty</u>	<u> 4</u>	Amount o	Proposal of Bid Guaranty
Up to		\$5,000	\$150	\$2,000,000	to	\$3,000,000\$100,000
\$5,000	to	\$10,000	\$300	\$3,000,000	to	\$5,000,000\$150,000
\$10,000	to	\$50,000	\$1,000	\$5,000,000	to	\$7,500,000 \$250,000
\$50,000	to	\$100,000	\$3,000	\$7,500,000	to	\$10,000,000\$400,000
\$100,000	to	\$150,000	\$5,000	\$10,000,000	to	\$15,000,000\$500,000
\$150,000	to	\$250,000	\$7,500	\$15,000,000	to	\$20,000,000\$600,000
\$250,000	to	\$500,000	. \$12,500	\$20,000,000	to	\$25,000,000\$700,000
\$500,000	to	\$1,000,000	. \$25,000	\$25,000,000	to	\$30,000,000\$800,000
\$1,000,000	to	\$1,500,000	. \$50,000	\$30,000,000	to	\$35,000,000\$900,000
\$1,500,000	to	\$2,000,000	. \$75,000	over		\$35,000,000 \$1,000,000

Bank cashier's checks or properly certified checks accompanying proposals shall be made payable to the Treasurer, State of Illinois, when the state is awarding authority; the county treasurer, when a county is the awarding authority; or the city, village, or town treasurer, when a city, village, or town is the awarding authority.

If a combination bid is submitted,	the proposal guaranties which	accompany the individual	proposals making up the	combination will be consi-	dered as
also covering the combination bid.	-				

The amount of the proposal guaranty check is _______\$(). If this proposal is accepted and the undersigned shall fail to execute a contract bond as required herein, it is hereby agreed that the amount of the proposal guaranty shall become the property of the State of Illinois, and shall be considered as payment of damages due to delay and other causes suffered by the State because of the failure to execute said contract and contract bond; otherwise, the bid bond shall become void or the proposal guaranty check shall be returned to the undersigned.

Attach Cashier's Check or Certified Check Here In the event that one proposal guaranty check is intended to cover two or more proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual proposal. If the guaranty check is placed in another proposal, state below where it may be found.

County

Mark the proposal cover sheet as to the type of proposal guaranty submitted.

BD 354 (Rev. 11/2001)

6. **COMBINATION BIDS.** The undersigned further agrees that if awarded the contract for the sections contained in the following combination, he/she will perform the work in accordance with the requirements of each individual proposal comprising the combination bid specified in the schedule below, and that the combination bid shall be prorated against each section in proportion to the bid submitted for the same. If an error is found to exist in the gross sum bid for one or more of the individual sections included in a combination, the combination bid shall be corrected as provided in the specifications.

When a combination bid is submitted, the schedule below must be completed in each proposal comprising the combination.

If alternate bids are submitted for one or more of the sections comprising the combination, a combination bid must be submitted for each alternate.

Schedule of Combination Bids

Combination		Combination Bid			
No.	Sections Included in Combination	Dollars	Cents		

- 7. SCHEDULE OF PRICES. The undersigned bidder submits herewith, in accordance with the rules and instructions, a schedule of prices for the items of work for which bids are sought. The unit prices bid are in U.S. dollars and cents, and all extensions and summations have been made. The bidder understands that the quantities appearing in the bid schedule are approximate and are provided for the purpose of obtaining a gross sum for the comparison of bids. If there is an error in the extension of the unit prices, the unit prices shall govern. Payment to the contractor awarded the contract will be made only for actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as provided elsewhere in the contract.
- 8. **CERTIFICATE OF AUTHORITY.** The undersigned bidder, if a business organized under the laws of another State, assures the Department that it will furnish a copy of its certificate of authority to do business in the State of Illinois with the return of the executed contract and bond. Failure to furnish the certificate within the time provided for execution of an awarded contract may be cause for cancellation of the award and forfeiture of the proposal guaranty to the State.

Route

FAI 57

ILLINOIS DEPARTMENT OF TRANSPORTATION SCHEDULE OF PRICES CONTRACT NUMBER - 74068

Project Number

SQ YD

SQ YD

SQ YD

SQ YD

FOOT

L SUM

L SUM

EACH

State Job # - C-97-089-04

PPS NBR - 0-00845-7006

44200565 CL A PATCH T2 11

44200569 CL A PATCH T3 11

44200571 CL A PATCH T4 11

44213200 SAW CUTS

67100100 MOBILIZATION

44213000 PATCH REINFORCEMENT

70100305 TRAF CONT-PROT 701400

70100420 TRAF CONT-PROT 701411

County Name - JEFFERSON- -

Code - 81 - - District - 7 - -

District -	7						
Section Number -	D-7 PAVT PATCHING 2005-3						
	T				T		
Item		Unit of					
Number	Pay Item Description	Measure	Quantity	Х	Unit Price	=	Total Price
X7010805	TR C-PROT 701401 SPL	L SUM	1.000				
Z0075300	TIE BARS	EACH	9.000				
44200561	CL A PATCH T1 11	SQ YD	4.000				

264.000

173.000

25.000

465.000

1.000

1.000

4.000

2,573.000

CONTRACT NU	MBER
-------------	------

74068

NOTES:

- 1. Each PAY ITEM should have a UNIT PRICE and a TOTAL PRICE.
- 2. The UNIT PRICE shall govern if no TOTAL PRICE is shown or if there is a discrepancy between the product of the UNIT PRICE multiplied by the QUANTITY.
- 3. If a UNIT PRICE is omitted, the TOTAL PRICE will be divided by the QUANTITY in order to establish a UNIT PRICE.
- 4. A bid may be declared UNACCEPTABLE if neither a unit price nor a total price is shown.

STATE REQUIRED ETHICAL STANDARDS GOVERNING CONTRACT PROCUREMENT: ASSURANCES, CERTIFICATIONS AND DISCLOSURES

I. GENERAL

- **A.** Article 50 of the Illinois Procurement Code establishes the duty of all State chief procurement officers, State purchasing officers, and their designees to maximize the value of the expenditure of public moneys in procuring goods, services, and contracts for the State of Illinois and to act in a manner that maintains the integrity and public trust of State government. In discharging this duty, they are charged by law to use all available information, reasonable efforts, and reasonable actions to protect, safeguard, and maintain the procurement process of the State of Illinois.
- **B.** In order to comply with the provisions of Article 50 and to carry out the duty established therein, all bidders are to adhere to ethical standards established for the procurement process, and to make such assurances, disclosures and certifications required by law. By execution of the Proposal Signature Sheet, the bidder indicates that each of the mandated assurances has been read and understood, that each certification is made and understood, and that each disclosure requirement has been understood and completed.
- **C.** In addition to all other remedies provided by law, failure to comply with any assurance, failure to make any disclosure or the making of a false certification shall be grounds for termination of the contract and the suspension or debarment of the bidder.

II. ASSURANCES

A. The assurances hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous assurance, and the surety providing the performance bond shall be responsible for the completion of the contract.

B. Felons

1. The Illinois Procurement Code provides:

Section 50-10. Felons. Unless otherwise provided, no person or business convicted of a felony shall do business with the State of Illinois or any state agency from the date of conviction until 5 years after the date of completion of the sentence for that felony, unless no person held responsible by a prosecutorial office for the facts upon which the conviction was based continues to have any involvement with the business.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-10.

C. Conflicts of Interest

1. The Illinois Procurement Code provides in pertinent part:

Section 50-13. Conflicts of Interest.

- (a) Prohibition. It is unlawful for any person holding an elective office in this State, holding a seat in the General Assembly, or appointed to or employed in any of the offices or agencies of state government and who receives compensation for such employment in excess of 60% of the salary of the Governor of the State of Illinois, or who is an officer or employee of the Capital Development Board or the Illinois Toll Highway Authority, or who is the spouse or minor child of any such person to have or acquire any contract, or any direct pecuniary interest in any contract therein, whether for stationery, printing, paper, or any services, materials, or supplies, that will be wholly or partially satisfied by the payment of funds appropriated by the General Assembly of the State of Illinois or in any contract of the Capital Development Board or the Illinois Toll Highway authority.
- (b) Interests. It is unlawful for any firm, partnership, association or corporation, in which any person listed in subsection (a) is entitled to receive (i) more than 7 1/2% of the total distributable income or (ii) an amount in excess of the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.
- (c) Combined interests. It is unlawful for any firm, partnership, association, or corporation, in which any person listed in subsection (a) together with his or her spouse or minor children is entitled to receive (i) more than 15%, in the aggregate, of the total distributable income or (ii) an amount in excess of 2 times the salary of the Governor, to have or acquire any such contract or direct pecuniary interest therein.
- (d) Securities. Nothing in this Section invalidates the provisions of any bond or other security previously offered or to be offered for sale or sold by or for the State of Illinois.
- (e) Prior interests. This Section does not affect the validity of any contract made between the State and an officer or employee of the State or member of the General Assembly, his or her spouse, minor child or any combination of those persons if that contract was in existence before his or her election or employment as an officer, member, or employee. The contract is voidable, however, if it cannot be completed within 365 days after the officer, member, or employee takes office or is employed.

The current salary of the Governor is \$150,700.00. Sixty percent of the salary is \$90,420.00.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-13, or that an effective exemption has been issued by the Board of Ethics to any individual subject to the Section 50-13 prohibitions pursuant to the provisions of Section 50-20 of the Code and Executive Order Number 3 (1998). Information concerning the exemption process is available from the Department upon request.

D. Negotiations

1. The Illinois Procurement Code provides in pertinent part:

Section 50-15. Negotiations.

- (a) It is unlawful for any person employed in or on a continual contractual relationship with any of the offices or agencies of State government to participate in contract negotiations on behalf of that office or agency with any firm, partnership, association, or corporation with whom that person has a contract for future employment or is negotiating concerning possible future employment.
- 2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-15, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

E. Inducements

1. The Illinois Procurement Code provides:

Section 50-25. Inducement. Any person who offers or pays any money or other valuable thing to any person to induce him or her not to bid for a State contract or as recompense for not having bid on a State contract is guilty of a Class 4 felony. Any person who accepts any money or other valuable thing for not bidding for a State contract or who withholds a bid in consideration of the promise for the payment of money or other valuable thing is guilty of a Class 4 felony.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-25, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

F. Revolving Door Prohibition

1. The Illinois Procurement Code provides:

Section 50-30. Revolving door prohibition. Chief procurement officers, associate procurement officers, State purchasing officers, their designees whose principal duties are directly related to State procurement, and executive officers confirmed by the Senate are expressly prohibited for a period of 2 years after terminating an affected position from engaging in any procurement activity relating to the State agency most recently employing them in an affected position for a period of at least 6 months. The prohibition includes, but is not limited to: lobbying the procurement process; specifying; bidding; proposing bid, proposal, or contract documents; on their own behalf or on behalf of any firm, partnership, association, or corporation. This Section applies only to persons who terminate an affected position on or after January 15, 1999.

2. The bidder assures the Department that the award and execution of the contract would not cause a violation of Section 50-30, and that the bidder has no knowledge of any facts relevant to the kinds of acts prohibited therein.

G. Reporting Anticompetitive Practices

1. The Illinois Procurement Code provides:

Section 50-40. Reporting anticompetitive practices. When, for any reason, any vendor, bidder, contractor, chief procurement officer, State purchasing officer, designee, elected official, or State employee suspects collusion or other anticompetitive practice among any bidders, offerors, contractors, proposers, or employees of the State, a notice of the relevant facts shall be transmitted to the Attorney General and the chief procurement officer.

2. The bidder assures the Department that it has not failed to report any relevant facts concerning the practices addressed in Section 50-40 which may involve the contract for which the bid is submitted.

H. Confidentiality

1. The Illinois Procurement Code provides:

Section 50-45. Confidentiality. Any chief procurement officer, State purchasing officer, designee, or executive officer who willfully uses or allows the use of specifications, competitive bid documents, proprietary competitive information, proposals, contracts, or selection information to compromise the fairness or integrity of the procurement, bidding, or contract process shall be subject to immediate dismissal, regardless of the Personnel code, any contract, or any collective bargaining agreement, and may in addition be subject to criminal prosecution.

2. The bidder assures the Department that it has no knowledge of any fact relevant to the practices addressed in Section 50-45 which may involve the contract for which the bid is submitted.

I. Insider Information

1. The Illinois Procurement Act provides:

Section 50-50. Insider information. It is unlawful for any current or former elected or appointed State official or State employee to knowingly use confidential information available only by virtue of that office or employment for actual or anticipated gain for themselves or another person.

2. The bidder assures the Department that it has no knowledge of any facts relevant to the practices addressed in Section 50-50 which may involve the contract for which the bid is submitted.

III. CERTIFICATIONS

A. The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous certification, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Bribery

1. The Illinois Procurement Code provides:

Section 50-5. Bribery.

- (a) Prohibition. No person or business shall be awarded a contract or subcontract under this Code who:
 - (1) has been convicted under the laws of Illinois or any other state of bribery or attempting to bribe an officer or employee of the State of Illinois or any other state in that officer's or employee's official capacity; or
 - (2) has made an admission of guilt of that conduct that is a matter of record but has not been prosecuted for that conduct.
- (b) Businesses. No business shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of the business if the employee or agent is no longer employed by the business and:
 - (1) the business has been finally adjudicated not guilty; or
 - (2) the business demonstrates to the governmental entity with which it seeks to contract, and that entity finds that the commission of the offense was not authorized, requested, commanded, or performed by a director, officer, or high managerial agent on behalf of the business as provided in paragraph (2) of subsection (a) of Section 5-4 of the Criminal Code of 1961.
- (c) Conduct on behalf of business. For purposes of this Section, when an official, agent, or employee of a business committed the bribery or attempted bribery on behalf of the business and in accordance with the direction or authorization of a responsible official of the business, the business shall be chargeable with the conduct.
- (d) Certification. Every bid submitted to and contract executed by the State shall contain a certification by the contractor that the contractor is not barred from being awarded a contract or subcontract under this Section. A contractor who makes a false statement, material to the certification, commits a Class 3 felony.
- 2. The bidder certifies that it is not barred from being awarded a contract under Section 50.5.

C. Educational Loan

- 1. Section 3 of the Educational Loan Default Act provides:
- § 3. No State agency shall contract with an individual for goods or services if that individual is in default, as defined in Section 2 of this Act, on an educational loan. Any contract used by any State agency shall include a statement certifying that the individual is not in default on an educational loan as provided in this Section.
- 2. The bidder, if an individual as opposed to a corporation, partnership or other form of business organization, certifies that the bidder is not in default on an educational loan as provided in Section 3 of the Act.

D. Bid-Rigging/Bid Rotating

1. Section 33E-11 of the Criminal Code of 1961 provides:

§ 33E-11. (a) Every bid submitted to and public contract executed pursuant to such bid by the State or a unit of local government shall contain a certification by the prime contractor that the prime contractor is not barred from contracting with any unit of State or local government as a result of a violation of either Section 33E-3 or 33E-4 of this Article. The State and units of local government shall provide the appropriate forms for such certification.

(b) A contractor who makes a false statement, material to the certification, commits a Class 3 felony.

A violation of Section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent in behalf of the corporation.

2. The bidder certifies that it is not barred from contracting with the Department by reason of a violation of either Section 33E-3 or Section 33E-4.

E. International Anti-Boycott

- 1. Section 5 of the International Anti-Boycott Certification Act provides:
- § 5. State contracts. Every contract entered into by the State of Illinois for the manufacture, furnishing, or purchasing of supplies, material, or equipment or for the furnishing of work, labor, or services, in an amount exceeding the threshold for small purchases according to the purchasing laws of this State or \$10,000.00, whichever is less, shall contain certification, as a material condition of the contract, by which the contractor agrees that neither the contractor nor any substantially-owned affiliated company is participating or shall participate in an international boycott in violation of the provisions of the U.S. Export Administration Act of 1979 or the regulations of the U.S. Department of Commerce promulgated under that Act.
- 2. The bidder makes the certification set forth in Section 5 of the Act.

F. Drug Free Workplace

- 1. The Illinois "Drug Free Workplace Act" applies to this contract and it is necessary to comply with the provisions of the "Act" if the contractor is a corporation, partnership, or other entity (including a sole proprietorship) which has 25 or more employees.
- 2. The bidder certifies that if awarded a contract in excess of \$5,000 it will provide a drug free workplace by:
- (a) Publishing a statement notifying employees that the unlawful manufacture, distribution, dispensation, possession or use of a controlled substance, including cannabis, is prohibited in the contractor's workplace; specifying the actions that will be taken against employees for violations of such prohibition; and notifying the employee that, as a condition of employment on such contract, the employee shall abide by the terms of the statement, and notify the employer of any criminal drug statute conviction for a violation occurring in the workplace no later than five (5) days after such conviction.
- (b) Establishing a drug free awareness program to inform employees about the dangers of drug abuse in the workplace; the contractor's policy of maintaining a drug free workplace; any available drug counseling, rehabilitation, and employee assistance programs; and the penalties that may be imposed upon employees for drug violations.
- (c) Providing a copy of the statement required by subparagraph (1) to each employee engaged in the performance of the contract and to post the statement in a prominent place in the workplace.
- (d) Notifying the Department within ten (10) days after receiving notice from an employee or otherwise receiving actual notice of the conviction of an employee for a violation of any criminal drug statute occurring in the workplace.
- (e) Imposing or requiring, within 30 days after receiving notice from an employee of a conviction or actual notice of such a conviction, an appropriate personnel action, up to and including termination, or the satisfactory participation in a drug abuse assistance or rehabilitation program approved by a federal, state or local health, law enforcement or other appropriate agency.
- (f) Assisting employees in selecting a course of action in the event drug counseling, treatment, and rehabilitation is required and indicating that a trained referral team is in place.
- (g) Making a good faith effort to continue to maintain a drug free workplace through implementation of the actions and efforts stated in this certification.

G. Debt Delinquency

1. The Illinois Procurement Code provides:

Section 50-11 and 50-12. Debt Delinquency.

The contractor or bidder certifies that it, or any affiliate, is not barred from being awarded a contract under 30 ILCS 500. Section 50-11 prohibits a person from entering into a contract with a State agency if it knows or should know that it, or any affiliate, is delinquent in the payment of any debt to the State as defined by the Debt Collection Board. Section 50-12 prohibits a person from entering into a contract with a State agency if it, or any affiliate, has failed to collect and remit Illinois Use Tax on all sales of tangible personal property into the State of Illinois in accordance with the provisions of the Illinois Use Tax Act. The contractor further acknowledges that the contracting State agency may declare the contract void if this certification is false or if the contractor, or any affiliate, is determined to be delinquent in the payment of any debt to the State during the term of the contract.

H. Sarbanes-Oxley Act of 2002

1. The Illinois Procurement Code provides:

Section 50-60(c).

The contractor certifies in accordance with 30 ILCS 500/50-10.5 that no officer, director, partner or other managerial agent of the contracting business has been convicted of a felony under the Sarbanes-Oxley Act of 2002 or a Class 3 or Class 2 felony under the Illinois Securities Law of 1953 for a period of five years prior to the date of the bid or contract. The contractor acknowledges that the contracting agency shall declare the contract void if this certification is false.

I. ADDENDA

The contractor or bidder certifies that all relevant addenda have been incorporated in to this contract. Failure to do so may cause the bid to be declared unacceptable.

J. Section 42 of the Environmental Protection Act

The contractor certifies in accordance with 30 ILCS 500/50-12 that the bidder or contractor is not barred from being awarded a contract under this Section which prohibits the bidding on or entering into contracts with the State of Illinois or a State agency by a person or business found by a court or the Pollution Control Board to have committed a willful or knowing violation of Section 42 of the Environmental Protection Act for a period of five years from the date of the order. The contractor acknowledges that the contracting agency may declare the contract void if this certification is false.

K. Apprenticeship and Training Certification (Does not apply to federal aid projects)

In accordance with the provisions of Section 30-22 (6) of the Illinois Procurement Code, the bidder certifies that it is a participant. either as an individual or as part of a group program, in the approved apprenticeship and training programs applicable to each type of work or craft that the bidder will perform with its own forces. The bidder further certifies for work that will be performed by subcontract that each of its subcontractors submitted for approval either (a) is, at the time of such bid, participating in an approved, applicable apprenticeship and training program; or (b) will, prior to commencement of performance of work pursuant to this contract, begin participation in an approved apprenticeship and training program applicable to the work of the subcontract. The Department, at any time before or after award, may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. Applicable apprenticeship and training programs are those that have been approved and registered with the United States Department of Labor. The bidder shall list in the space below, the official name of the program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's forces. Types of work or craft work that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category that does not have an applicable apprenticeship or training program. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project as reported on the Construction Employee Workforce Projection (Form BC-1256) and returned with the bid is accounted for and listed.

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. In order to fulfill this requirement, it shall not be necessary that an applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract.

TO BE RETURNED WITH BID

IV. DISCLOSURES

A. The disclosures hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder. The Department may terminate the contract if it is later determined that the bidder rendered a false or erroneous disclosure, and the surety providing the performance bond shall be responsible for completion of the contract.

B. Financial Interests and Conflicts of Interest

1. Section 50-35 of the Illinois Procurement Code provides that all bids of more than \$10,000 shall be accompanied by disclosure of the financial interests of the bidder. This disclosed information for the successful bidder, will be maintained as public information subject to release by request pursuant to the Freedom of Information Act.

The financial interests to be disclosed shall include ownership or distributive income share that is in excess of 5%, or an amount greater than 60% of the annual salary of the Governor, of the bidding entity or its parent entity, whichever is less, unless the contractor or bidder is a publicly traded entity subject to Federal 10K reporting, in which case it may submit its 10K disclosure in place of the prescribed disclosure. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. The disclosure shall include the names, addresses, and dollar or proportionate share of ownership of each person making the disclosure, their instrument of ownership or beneficial relationship, and notice of any potential conflict of interest resulting from the current ownership or beneficial interest of each person making the disclosure having any of the relationships identified in Section 50-35 and on the disclosure form.

In addition, all disclosures shall indicate any other current or pending contracts, proposals, leases, or other ongoing procurement relationships the bidding entity has with any other unit of state government and shall clearly identify the unit and the contract, proposal, lease, or other relationship.

2. <u>Disclosure Forms</u>. Disclosure Form A is attached for use concerning the individuals meeting the above ownership or distributive share requirements. Subject individuals should be covered each by one form. In addition, a second form (Disclosure Form B) provides for the disclosure of current or pending procurement relationships with other (non-IDOT) state agencies. **The forms must be included with each bid or incorporated by reference.**

C. <u>Disclosure Form Instructions</u>

Form A: For bidders that have previously submitted the information requested in Form A

The Department has retained the Form A disclosures submitted by all bidders responding to these requirements for the April 24, 1998 or any subsequent letting conducted by the Department. The bidder has the option of submitting the information again or the bidder may sign the following certification statement indicating that the information previously submitted by the bidder is, as of the date of signature, current and accurate. The Certification must be signed and dated by a person who is authorized to execute contracts for the bidding company. Before signing this certification, the bidder should carefully review its prior submissions to ensure the Certification is correct. If the Bidder signs the Certification, the Bidder should proceed to Form B instructions.

CERTIFICATION STATEMENT

I have determined that the Form A disclosure information previously submitted is current and accurate, and all forms are hereby incorporated by reference in this bid. Any necessary additional forms or amendments to previously submitted forms are attached to this bid.								
-	(Bidding Company)							
-	Name of Authorized Repre	esentative (type or print)	Title of Authorized Repre	esentative (type or print)				
		Signature of Author	prized Representative	Date				

Form A: For bidders who have NOT previously submitted the information requested in Form A

D.

If the bidder is a publicly traded entity subject to Federal 10K reporting, the 10K Report may be submitted to meet the requirements of Form A. If a bidder is a privately held entity that is exempt from Federal 10K reporting, but has more than 400 shareholders, it may submit the information that Federal 10K companies are required to report, and list the names of any person or entity holding any ownership share that is in excess of 5%. If a bidder is not subject to Federal 10K reporting, the bidder must determine if any individuals are required by law to complete a financial disclosure form. To do this, the bidder should answer each of the following questions. A "YES" answer indicates Form A must be completed. If the answer to each of the following questions is "NO", then the NOT APPLICABLE STATEMENT on the second page of Form A must be signed and dated by a person that is authorized to execute contracts for the bidding company. Note: These questions are for assistance only and are not required to be completed.

1.	Does anyone in your organization have a direct or beneficial ownership share of greater than 5% of the bidding entity or parent entity? YES NO
2.	Does anyone in your organization have a direct or beneficial ownership share of less than 5%, but which has a value greater than \$90,420.00? YES NO
3.	Does anyone in your organization receive more than \$90,420.00 of the bidding entity's or parent entity's distributive income? (Note: Distributive income is, for these purposes, any type of distribution of profits. An annual salary is not distributive income.) YES NO
4.	Does anyone in your organization receive greater than 5% of the bidding entity's or parent entity's total distributive income, but which is less than \$90,420.00? YES NO
	(Note: Only one set of forms needs to be completed <u>per person per bid</u> even if a specific individual would require a yes answer to more than one question.)
bidding e authorize	answer to any of these questions requires the completion of Form A. The bidder must determine each individual in the bidding entity or the ntity's parent company that would cause the questions to be answered "Yes". Each form must be signed and dated by a person that is d to execute contracts for your organization. Photocopied or stamped signatures are not acceptable . The person signing can be, but have to be, the person for which the form is being completed. The bidder is responsible for the accuracy of any information provided.
If the ans a person	wer to each of the above questions is "NO", then the <u>NOT APPLICABLE STATEMENT</u> on page 2 of Form A must be signed and dated by that is authorized to execute contracts for your company.
bidding e	Identifying Other Contracts & Procurement Related Information Disclosure Form B must be completed for each bid submitted by the ntity. It must be signed by an individual who is authorized to execute contracts for the bidding entity. Note: Signing the NOT INBLE STATEMENT On Form A does not allow the bidder to ignore Form B. Form B must be completed, signed and dated or the bidder considered nonresponsive and the bid will not be accepted.
ongoing	er shall identify, by checking Yes or No on Form B, whether it has any pending contracts (including leases), bids, proposals, or other procurement relationship with any other (non-IDOT) State of Illinois agency. If "No" is checked, the bidder only needs to complete the box on the bottom of Form B. If "Yes" is checked, the bidder must do one of the following:
agency p attached and are r	If the bidder did not submit an Affidavit of Availability to obtain authorization to bid, the bidder must list all non-IDOT State of Illinois ending contracts, leases, bids, proposals, and other ongoing procurement relationships. These items may be listed on Form B or on an sheet(s). Do not include IDOT contracts. Contracts with cities, counties, villages, etc. are not considered State of Illinois agency contracts to be included. Contracts with other State of Illinois agencies such as the Department of Natural Resources or the Capital Development ust be included. Bidders who submit Affidavits of Availability are suggested to use Option II.
"See Afficagency p	If the bidder is required and has submitted an Affidavit of Availability in order to obtain authorization to bid, the bidder may write or type davit of Availability" which indicates that the Affidavit of Availability is incorporated by reference and includes all non-IDOT State of Illinois ending contracts, leases, bids, proposals, and other ongoing procurement relationships. For any contracts that are not covered by the f Availability, the bidder must identify them on Form B or on an attached sheet(s). These might be such things as leases.
Bidders	Submitting More Than One Bid
	ubmitting multiple bids may submit one set of forms consisting of all required Form A disclosures and one Form B for use with all bids. dicate in the space provided below the bid item that contains the original disclosure forms and the bid items which incorporate the forms nce.
	e bid submitted for letting item contains the Form A disclosures or Certification Statement and the Form B closures. The following letting items incorporate the said forms by reference:

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form A Financial Information & Potential Conflicts of Interest Disclosure

Contractor Name		
Legal Address		
City, State, Zip		
Telephone Number	Email Address	Fax Number (if available)
Disclosure of the information contained in the 30 ILCS 500). Vendors desiring to enter interest and potential conflict of interest information as the publicly available contract file. This Founded contracts. A publicly traded comparts action of the requirements set forth	to a contract with the State of Illinois as specified in this Disclosure Form rm A must be completed for bids in a pany may submit a 10K disclo	s must disclose the financial information. This information shall become part of in excess of \$10,000, and for all open sure (or equivalent if applicable) in Instructions.
1. Disclosure of Financial Information. terms of ownership or distributive income s \$90,420.00 (60% of the Governor's salary a separate Disclosure Form A for each inc FOR INDIVIDUAL (type or print informa NAME:	hare in excess of 5%, or an interest as of 7/1/01). (Make copies of this lividual meeting these requireme	which has a value of more than form as necessary and attach a
ADDRESS		
Type of ownership/distributable inco	me share:	
stock sole proprietorship % or \$ value of ownership/distributable i		other: (explain on separate sheet):
2. Disclosure of Potential Conflicts of In potential conflict of interest relationships ap and describe.		
(a) State employment, currently or in t		ractual employment of services. YesNo
If your answer is yes, please answe	er each of the following questions.	
 Are you currently an officer Highway Authority? 	r or employee of either the Capitol D	Development Board or the Illinois Toll YesNo
currently appointed to or er	ed to or employed by any agency of the State % of the Governor's salary as of 7/	of Illinois, and your annual salary

agency for which you are employed and your annual salary.

3.	If you are currently appointed to or employed by any agency of the S salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1 (i) more than 7 1/2% of the total distributable income of your firm corporation, or (ii) an amount in excess of the salary of the Governor	/01) are you entitled to receive , partnership, association or
4.	If you are currently appointed to or employed by any agency of the S salary exceeds \$90,420.00, (60% of the Governor's salary as of 7/1 or minor children entitled to receive (i) more than 15 % in the aggrincome of your firm, partnership, association or corporation, or (ii) are the salary of the Governor?	/01) are you and your spouse egate of the total distributable
•	oyment of spouse, father, mother, son, or daughter, including contractious 2 years.	ctual employment services
If your ans	wer is yes, please answer each of the following questions.	YesNo
1.	Is your spouse or any minor children currently an officer or employee Board or the Illinois Toll Highway Authority?	e of the Capitol Development YesNo
2.	Is your spouse or any minor children currently appointed to or emplo of Illinois? If your spouse or minor children is/are currently appagency of the State of Illinois, and his/her annual salary exceed Governor's salary as of 7/1/01) provide the name of your spouse a of the State agency for which he/she is employed and his/her annual	pointed to or employed by any ds \$90,420.00, (60 % of the nd/or minor children, the name
3.	If your spouse or any minor children is/are currently appointed to or State of Illinois, and his/her annual salary exceeds \$90,420.00, (60% as of 7/1/01) are you entitled to receive (i) more then 71/2% of the to firm, partnership, association or corporation, or (ii) an amount in Governor?	% of the salary of the Governor tal distributable income of your
4.	If your spouse or any minor children are currently appointed to or endestate of Illinois, and his/her annual salary exceeds \$90,420.00, (60% 7/1/01) are you and your spouse or minor children entitled to recapgregate of the total distributable income of your firm, partnership, (ii) an amount in excess of 2 times the salary of the Governor?	of the Governor's salary as of eive (i) more than 15 % in the
		YesNo
unit of	ve status; the holding of elective office of the State of Illinois, the gover local government authorized by the Constitution of the State of Illinois currently or in the previous 3 years.	
	onship to anyone holding elective office currently or in the previous 2 yr daughter.	years; spouse, father, mother, YesNo
Ameri of the	ntive office; the holding of any appointive government office of the Staca, or any unit of local government authorized by the Constitution of the State of Illinois, which office entitles the holder to compensation in exceptange of that office currently or in the previous 3 years.	he State of Illinois or the statutes
` '	onship to anyone holding appointive office currently or in the previous 2 daughter.	2 years; spouse, father, mother, YesNo
(g) Emplo	byment, currently or in the previous 3 years, as or by any registered lob	obyist of the State government. YesNo

(h) Relationship to a son, or daughter.	nyone who is or was a registered lobbyist in the previous 2 years; spou YesNo	
committee regist	ployment, currently or in the previous 3 years, by any registered electered with the Secretary of State or any county clerk of the State of Illinor registered with either the Secretary of State or the Federal Board of Ele	ois, or any political ections.
last 2 years by ar county clerk of th	nyone; spouse, father, mother, son, or daughter; who was a compensative registered election or re-election committee registered with the Secrete State of Illinois, or any political action committee registered with either	etary of State or any er the Secretary of
		-
	APPLICABLE STATEMENT	
This Disclosure Fo	rm A is submitted on behalf of the INDIVIDUAL named on previous	page.
Completed by:		
	Name of Authorized Representative (type or print)	
Completed by:		
	Title of Authorized Representative (type or print)	
Completed by:		
	Signature of Individual or Authorized Representative	Date
	NOT APPLICABLE STATEMENT	
	that no individuals associated with this organization meet the crite tion of this Form A.	ria that would
This Disclosure Fo	rm A is submitted on behalf of the CONTRACTOR listed on the pre	vious page.
	Name of Authorized Representative (type or print)	
	Title of Authorized Representative (type or print)	
	Signature of Authorized Representative	Date

ILLINOIS DEPARTMENT OF TRANSPORTATION

Form B Other Contracts & Procurement Related Information Disclosure

		Disclosure	
Contractor Name			
Legal Address			
City, State, Zip			
Telephone Number	Email Address	Fax Number (if available)	
	ontained in this Form is required by the lall become part of the publicly availab for all open-ended contracts.		
DISCLOSURE O	F OTHER CONTRACTS AND PROC	UREMENT RELATED INFORMA	ATION
pending contracts (including leading l	cts & Procurement Related Informate eases), bids, proposals, or other ongoin No er only needs to complete the signature.	ng procurement relationship with	
	tify each such relationship by showing as bid or project number (attach addition		
	THE FOLLOWING STATEMENT N	MUST BE SIGNED	
	Name of Authorized Representation	ve (type or print)	
	Title of Authorized Representative	e (type or print)	
	Signature of Authorized Rep	resentative	Date

SPECIAL NOTICE TO CONTRACTORS

The following requirements of the Illinois Department of Human Rights' Rules and Regulations are applicable to bidders on all construction contracts advertised by the Illinois Department of Transportation:

CONSTRUCTION EMPLOYEE UTILIZATION PROJECTION

- (a) All bidders on construction contracts shall complete and submit, along with and as part of their bids, a Bidder's Employee Utilization Form (Form BC-1256) setting forth a projection and breakdown of the total workforce intended to be hired and/or allocated to such contract work by the bidder including a projection of minority and female employee utilization in all job classifications on the contract project.
- (b) The Department of Transportation shall review the Employee Utilization Form, and workforce projections contained therein, of the contract awardee to determine if such projections reflect an underutilization of minority persons and/or women in any job classification in accordance with the Equal Employment Opportunity Clause and Section 7.2 of the Illinois Department of Human Rights' Rules and Regulations for Public Contracts adopted as amended on September 17, 1980. If it is determined that the contract awardee's projections reflect an underutilization of minority persons and/or women in any job classification, it shall be advised in writing of the manner in which it is underutilizing and such awardee shall be considered to be in breach of the contract unless, prior to commencement of work on the contract project, it submits revised satisfactory projections or an acceptable written affirmative action plan to correct such underutilization including a specific timetable geared to the completion stages of the contract.
- (c) The Department of Transportation shall provide to the Department of Human Rights a copy of the contract awardee's Employee Utilization Form, a copy of any required written affirmative action plan, and any written correspondence related thereto. The Department of Human Rights may review and revise any action taken by the Department of Transportation with respect to these requirements.



Contract No. 74068
JEFFERSON County
Section D-7 PAVT PATCHING 2005-3
Route FAI 57
District 7 Construction Funds

									DIST	ict /	Cons	truction	ı run	เนร				
PART I. IDENTIFIC	ATION																	
Dept. Human Rights	s #						_ Dui	ation c	of Proje	ect:								
Name of Bidder:																		
PART II. WORKFO A. The undersigned which this contract wo projection including a p	bidder hark is to be	as analyz perform	ed mir ed, an	d for th d fema	ne locati	ons fro	m whi	ch the b	idder re	cruits	employe	es, and he	reby su	ıbm	its the foll	owir con	ng workfo	n orce
		TOTA	AL Wo	rkforce	e Projec	tion for	Contra	act	1					C	URRENT		_	ES
				MIN	ORITY I	EMPLO	YEES			TRA	AINEES				TO BE		RACT	
JOB		TAL						HER	APPI	REN-		HE JOB			TAL		MINC	DRITY
CATEGORIES	EMPLO M	OYEES F	BL/ M	ACK F	HISP.	ANIC F	MIN M	NOR. F	TIC M	ES F	TRA M	INEES F	EI		OYEES F		EMPL(OYEES F
OFFICIALS (MANAGERS)	IVI	Г	IVI	Г	IVI	Г	IVI	_ г	IVI		IVI	Г		/1	Г		IVI	Г
SUPERVISORS																		
FOREMEN																		
CLERICAL EQUIPMENT																		
OPERATORS																		
MECHANICS																		
TRUCK DRIVERS																	<u> </u>	
IRONWORKERS																		
CARPENTERS																		
CEMENT MASONS																		
ELECTRICIANS PIPEFITTERS,																		
PLUMBERS																		
PAINTERS LABORERS.																		
SEMI-SKILLED																		
LABORERS, UNSKILLED																		
TOTAL																		
		BLE C							_		F	OR DEPA	RTME	NT	USE ON	NLY		
T EMPLOYEES	OTAL Tra	aining Pro TAL	ojectio I	n for C	Contract		*^	THER	4		-							
IN		OYEES	BL	ACK	HISP	ANIC		NOR.										
TRAINING	М	F	М	F	М	F	М	F										
APPRENTICES																		
ON THE JOB																		

*Other minorities are defined as Asians (A) or Native Americans (N).

TRAINEES

Please specify race of each employee shown in Other Minorities column.

Note: See instructions on the next page

BC 1256 - Pg 1 (Rev. 3/98) IL 494-0454

Contract No. 74068
JEFFERSON County
Section D-7 PAVT PATCHING 2005-3
Route FAI 57
District 7 Construction Funds

PART II. WORKFORCE PROJECTION - continued

B.		ided in "To it the under						otal nun	nber o	of new	hires	that	would	be em	ployed	in the
	The	undersigne	d bidde	r proje	ects tha	t: (numbe	r)							nev	v hires	hluow
	be	undersigne recruited	from	the	area	in which	h the	cont	ract	proied	ct is	loc	ated:	and/c	r (nu	mber)
						_ new hire	s woul	d be red	cruited	I from t	the are	ea in v	which t	he bido	der's pri	ncipal
	office	e or base of	f operati	on is l	ocated.											-
C.		ided in "Tot ersigned bio														by the
	The	undersigne	d bidder	r estim	ates tha	at (number))								persor	ns will
	be d	irectly emp loyed by su	loyed by	the p	rime co	entractor an	d that	(numbe	r)					pe	ersons v	vill be
PART	III. AF	FIRMATIV	E ACTIO	ON PL	AN											
A.	utiliz in ar comi (gea utiliz	undersigne ation project y job cate, mencemen red to the ation are coepartmen	ction incl gory, an t of wor comple orrected	luded d in th k, dev tion s . Suc	under P ne even velop ai tages o h Affirm	PART II is do not that the under submit of the continuity.	etermii indersi a writt act) w	ned to b gned bi en Affir hereby	e an under inder i	underu s awai e Actio encies	tilization rded the on Plati in m	on of inis con inclination	minority ntract, uding and/o	y perso he/she a spec or fema	ons or we will, position time time allowers.	omen rior to etable bloyee
	subn to be	undersigne nitted herei part of the	n, and the contrac	he goa t spec	als and ification	timetable ir s.	ncluded	l under	an Af	firmativ	/e Acti	on Pl		quired	, are de	
Δddra																
Addie																
						NOTICE R	EGAR	ING SIC	SNATU	JRE						
		idder's signa to be compl					et will co	onstitute	the sig	ning of	this fo	rm. T	he follo	wing sig	nature b	lock
	Signat	ure:						Title: _					Date:			_
Instruc	tions:	All tables n	nust includ	de subco	ontractor p	personnel in a	ddition to	prime co	ontracto	r person	nel.					
Table A	٨ -	(Table B) t	hat will be	allocat	ed to con	es that would tract work, an g all minorities	d include	all appre	entices	and on-t	he-job t	rainees	s. The "	Γotal Em	ployees"	
Table E	3 -	Include all currently e		s currer	ntly emplo	yed that will b	e allocat	ed to the	contrac	t work in	ncluding	any ap	prentice	s and or	n-the-job t	rainees
Table () -	Indicate the	e racial bre	eakdowi	n of the to	tal apprentice	s and or	-the-job t	rainees	shown ii	n Table	A.				

Contract No. 74068
JEFFERSON County
Section D-7 PAVT PATCHING 2005-3
Route FAI 57
District 7 Construction Funds

PROPOSAL SIGNATURE SHEET

The undersigned bidder hereby makes and submits this bid on the subject Proposal, thereby assuring the Department that all requirements of the Invitation for Bids and rules of the Department have been met, that there is no misunderstanding of the requirements of paragraph 3 of this Proposal, and that the contract will be executed in accordance with the rules of the Department if an award is made on this bid.

	Firm Name	
(IF AN INDIVIDUAL)		
	Firm Name	
(IF A CO-PARTNERSHIP)		
,		
		Name and Address of All Members of the Firm:
_		
-		
	Ву	Signature of Authorized Representative
		Typed or printed name and title of Authorized Representative
(IF A CORPORATION)		
(IF A JOINT VENTURE, USE THIS SECTION	Attest	Signature
FOR THE MANAGING PARTY AND THE SECOND PARTY SHOULD SIGN BELOW)	Business Address	
·		
	Corporate Name	
	Ву	
		Signature of Authorized Representative
		Typed or printed name and title of Authorized Representative
(IF A JOINT VENTURE)	A 11 1	
	Attest	Signature
	Business Address	
If more than two parties are in the joint venture	nlease attach an ac	Iditional signature sheet



Division of Highways Proposal Bid Bond

(Effective November 1, 1992)

	Item No.
	Letting Date
KNOW ALL MEN BY THESE PRESENTS, That We	
as PRINCIPAL, and	
Article 102.09 of the "Standard Specifications for Road and Br	as SURETY, are LLINOIS in the penal sum of 5 percent of the total bid price, or for the amount specified in ridge Construction" in effect on the date of invitation for bids, whichever is the lesser sum, well ayment of which we bind ourselves, our heirs, executors, administrators, successors and assigns.
	ON IS SUCH, That Whereas, the PRINCIPAL has submitted a bid proposal to the STATE OF for the improvement designated by the Transportation Bulletin Item Number and Letting Date
the bidding and contract documents, submit a DBE Utilization PRINCIPAL shall enter into a contract in accordance with the coverages and providing such bond as specified with good and labor and material furnished in the prosecution thereof; or if, in into such contract and to give the specified bond, the PRINCIP	bid proposal of the PRINCIPAL; and if the PRINCIPAL shall, within the time and as specified in Plan that is accepted and approved by the Department; and if, after award by the Department, the terms of the bidding and contract documents including evidence of the required insurance sufficient surety for the faithful performance of such contract and for the prompt payment of the event of the failure of the PRINCIPAL to make the required DBE submission or to enter PAL pays to the Department the difference not to exceed the penalty hereof between the amount the Department may contract with another party to perform the work covered by said bid, it shall remain in full force and effect.
paragraph, then Surety shall pay the penal sum to the De	e PRINCIPAL has failed to comply with any requirement as set forth in the preceding epartment within fifteen (15) days of written demand therefor. If Surety does not make may bring an action to collect the amount owed. Surety is liable to the Department for a litigation in which it prevails either in whole or in part.
In TESTIMONY WHEREOF, the said PRINCIP officers this day of	PAL and the said SURETY have caused this instrument to be signed by their respectiveA.D.,
PRINCIPAL	SURETY
(Company Name)	(Company Name)
By:	Ву:
(Signature & Title)	(Signature of Attorney-in-Fact)
No	otary Certification for Principal and Surety
STATE OF ILLINOIS, COUNTY OF	
I,	, a Notary Public in and for said County, do hereby certify that
(Insert names of indiv	riduals signing on behalf of PRINCIPAL & SURETY)
	ersons whose names are subscribed to the foregoing instrument on behalf of in person and acknowledged respectively, that they signed and delivered said d purposes therein set forth.
Given under my hand and notarial seal this	_ day of, A.D
My commission expires	
	Notary Public
	id Form, the Principal may file an Electronic Bid Bond. By signing below the Principal secuted and the Principal and Surety are firmly bound unto the State of Illinois under the
Electronic Bid Bond ID# Company/Bidder Name	Signature and Title

PROPOSAL ENVELOPE



PROPOSALS

for construction work advertised for bids by the Illinois Department of Transportation

Item No.	Item No.	Item No.

Submitted By:

Name:	
Address:	
Phone No.	

Bidders should use an IDOT proposal envelope or affix this form to the front of a 10" x 13" envelope for the submittal of bids. If proposals are mailed, they should be enclosed in a second or outer envelope addressed to:

Engineer of Design and Environment - Room 323 Illinois Department of Transportation 2300 South Dirksen Parkway Springfield, Illinois 62764

NOTICE

Individual bids, including Bid Bond and/or supplemental information if required, should be securely stapled.

CONTRACTOR OFFICE COPY OF CONTRACT SPECIFICATIONS

NOTICE

None of the following material needs to be returned with the bid package unless the special provisions require documentation and/or other information to be submitted.

Contract No. 74068
JEFFERSON County
Section D-7 PAVT PATCHING 2005-3
Route FAI 57
District 7 Construction Funds



Illinois Department of Transportation

NOTICE TO BIDDERS

- 1. TIME AND PLACE OF OPENING BIDS. Sealed proposals for the improvement described herein will be received by the Department of Transportation at the Harry R. Hanley Building, 2300 South Dirksen Parkway, in Springfield, Illinois until 10:00 o'clock a.m., April 29, 2005. All bids will be gathered, sorted, publicly opened and read in the auditorium at the Department of Transportation's Harry R. Hanley Building shortly after the 10:00 a.m. cut off time.
- **2. DESCRIPTION OF WORK**. The proposed improvement is identified and advertised for bids in the Invitation for Bids as:

Contract No. 74068
JEFFERSON County
Section D-7 PAVT PATCHING 2005-3
Route FAI 57
District 7 Construction Funds

Pavement patching along I-57/64 at various locations at Mount Vernon.

- 3. INSTRUCTIONS TO BIDDERS. (a) This Notice, the invitation for bids, proposal and letter of award shall, together with all other documents in accordance with Article 101.09 of the Standard Specifications for Road and Bridge Construction, become part of the contract. Bidders are cautioned to read and examine carefully all documents, to make all required inspections, and to inquire or seek explanation of the same prior to submission of a bid.
 - (b) State law, and, if the work is to be paid wholly or in part with Federal-aid funds, Federal law requires the bidder to make various certifications as a part of the proposal and contract. By execution and submission of the proposal, the bidder makes the certification contained therein. A false or fraudulent certification shall, in addition to all other remedies provided by law, be a breach of contract and may result in termination of the contract.
- 4. AWARD CRITERIA AND REJECTION OF BIDS. This contract will be awarded to the lowest responsive and responsible bidder considering conformity with the terms and conditions established by the Department in the rules, Invitation for Bids and contract documents. The issuance of plans and proposal forms for bidding based upon a prequalification rating shall not be the sole determinant of responsibility. The Department reserves the right to determine responsibility at the time of award, to reject any or all proposals, to readvertise the proposed improvement, and to waive technicalities.

By Order of the Illinois Department of Transportation

Timothy W. Martin, Secretary

BD 351 (Rev. 01/2003)

INDEX FOR SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS Adopted March 1, 2005

This index contains a listing of SUPPLEMENTAL SPECIFICATIONS and frequently used RECURRING SPECIAL PROVISIONS.

ERRATA Standard Specifications for Road and Bridge Construction (Adopted 1-1-02) (Revised 3-1-05)

<u>SUPPLEMENTAL SPECIFICATIONS</u>

Std. S	pec. Sec.	Page No.
101	Definition of Terms	1
105	Control of Work	2
205	Embankment	3
251	Mulch	4
281	Riprap	5
282	Filter Fabric for Use With Riprap	
285	Concrete Revetment Mats	10
311	Granular Subbase	
351	Aggregate Base Course	15
440	Removal of Existing Pavement and Appurtenances	16
442	Pavement Patching	
449	Removal and Replacement of Preformed Elastomeric Compression Joint Seal	18
481	Aggregate Shoulders	
501	Removal of Existing Structures	20
503	Concrete Structures	
505	Steel Structures	22
506	Cleaning and Painting Metal Structures	
508	Reinforcement Bars	
512	Piling	
540	Box Culverts	
589	Elastic Joint Sealer	30
602	Catch Basin, Manhole, Inlet, Drainage Structures and Valve Vault	
	Construction, Adjustment and Reconstruction	31
603	Adjusting Frames and Grates of Drainage and Utility Structures	32
610	Shoulder Inlets with Curb	
665	Woven Wire Fence	
669	Removal and Disposal of Regulated Substances	
671	Mobilization	
702	Work Zone Traffic Control Devices	37
1003	Fine Aggregates	
1004	Coarse Aggregate	
1005	Stone, Concrete Blocks and Broken Concrete for Erosion Protection,	
	Sediment Control and Rockfill	42
1006	Metals	
1007	Timber and Preservative Treatment	49
1012	Hydrated Lime	50
1020	Portland Cement Concrete	
1021	Concrete Admixtures	58
1022	Concrete Curing Materials	
1024	Nonshrink Grout	61
1041	Brick	
1043	Precast Reinforced Concrete Manhole Sections and Adjusting Rings	
1056	Preformed Flexible Gaskets and Mastic Joint Sealer for Sewer and Culvert Pipe	66
1059	Elastic Joint Sealers	
1060	Waterproofing Materials	68
1069	Pole and Tower	69
1070	Foundation and Breakaway Devices	
1077	Post and Foundation	72
1080	Fabric Materials	
1081	Materials For Planting	
1083	Elastomeric Bearings	
1094	Overhead Sign Structures	78
1103	Portland Cement Concrete Equipment	79

RECURRING SPECIAL PROVISIONS

The following RECURRING SPECIAL PROVISIONS indicated by an "X" are applicable to this contract and are included by reference:

CHE	CK	SHEET#	GE NO.
1		State Required Contract Provisions All Federal-aid Construction Contracts (Eff. 2-1-69) (Rev. 10-1-83) .	80
2		Subletting of Contracts (Federal-aid Contracts) (Eff. 1-1-88) (Rev. 5-1-93)	82
3	Χ	EEO (Eff. 7-21-78) (Rev. 11-18-80)	83
4	Χ	Specific Equal Employment Opportunity Responsibilities NonFederal-aid Contracts	
		(Eff. 3-20-69) (Rev. 1-1-94)	. 94
5	Χ	Required Provisions - State Contracts (Eff. 4-1-65) (Rev. 4-1-93)	. 100
6		Reserved	. 105
7		Asphalt Quantities and Cost Reviews (Eff. 7-1-88)	
8		National Pollutant Discharge Elimination System Permit (Eff. 7-1-94) (Rev. 1-1-03)	. 107
9		Haul Road Stream Crossings, Other Temporary Stream Crossings and In-Stream Work Pads	400
40		(Eff. 1-2-92) (Rev. 1-1-98)	108
10		Construction Layout Stakes Except for Bridges (Eff. 1-1-99) (Rev. 1-1-02)	109
11		Construction Layout Stakes (Eff. 5-1-93) (Rev. 1-1-02)	112
12		Use of Geotextile Fabric for Railroad Crossing (Eff. 1-1-95) (Rev. 1-1-97)	115
13		Asphaltic Emulsion Slurry Seal and Fibrated Asphaltic Emulsion Slurry Seal (Eff. 8-1-89) (Rev. 2-1-97).	117
14		Bituminous Surface Treatments Half-Smart (Eff. 7-1-93) (Rev. 1-1-97)	
15		Quality Control/Quality Assurance of Bituminous Concrete Mixtures (Eff. 1-1-00) (Rev. 3-1-05)	
16		Subsealing of Concrete Pavements (Eff. 11-1-84) (Rev. 2-1-95)	
17		Bituminous Surface Removal (Cold Milling) (Eff. 11-1-87) (Rev. 10-15-97)	
18		Resurfacing of Milled Surfaces (Eff. 10-1-95)	
19		PCC Partial Depth Bituminous Patching (Eff. 1-1-98)	
20		Patching with Bituminous Overlay Removal (Eff. 10-1-95) (Rev. 7-1-99)	
21		Reserved	159
22		Protective Shield System (Eff. 4-1-95) (Rev. 1-1-03)	
23		Polymer Concrete (Eff. 8-1-95) (Rev. 3-1-05)	
24		Controlled Low-Strength Material (CLSM) (Eff. 1-1-90) (Rev. 3-1-05)	
25		Pipe Underdrains (Eff. 9-9-87) (Rev. 1-1-98)	
26		Guardrail and Barrier Wall Delineation (Eff. 12-15-93) (Rev. 1-1-97)	
27		Bicycle Racks (Eff. 4-1-94) (Rev. 1-1-97)	
28		Reserved	
29		Reserved	
30		Reserved	
31		Night Time Inspection of Roadway Lighting (Eff. 5-1-96)	
32		Reserved	
33		English Substitution of Metric Bolts (Eff. 7-1-96)	
34		English Substitution of Metric Reinforcement Bars (Eff. 4-1-96) (Rev. 1-1-03)	183
35		Polymer Modified Emulsified Asphalt (Eff. 5-15-89) (Rev. 1-1-04)	
36		Corrosion Inhibitor (Eff. 3-1-80) (Rev. 7-1-99)	
37		Quality Control of Concrete Mixtures at the Plant-Single A (Eff. 8-1-00) (Rev. 1-1-04)	
38		Quality Control of Concrete Mixtures at the Plant-Double A (Eff. 8-1-00) (Rev. 1-1-04)	
39		Quality Control/Quality Assurance of Concrete Mixtures (Eff. 4-1-92) (Rev. 3-1-05)	
40		Traffic Barrier Terminal Type 1, Special (Eff. 8-1-94) (Rev. 1-1-03)	
41		Reserved	
42		Segregation Control of Bituminous Concrete (Eff. 7-15-97)	
43		Reserved	220

TABLE OF CONTENTS

LOCATION OF PROJECT	1
DESCRIPTION OF PROJECT	1
WORKING DAYS (BDE)	1
TRAFFIC CONTROL PLAN	1
CALCIUM CHLORIDE ACCELERATOR FOR PORTLAND CEMENT CONCRETE PATCHING (BDE)	3
CHAIR SUPPORTS (BDE)	4
CONCRETE ADMIXTURES (BDE)	4
CURING AND PROTECTION OF CONCRETE CONSTRUCTION (BDE)	8
EPOXY COATING ON REINFORCEMENT (BDE)	15
FLAGGER VESTS (BDE)	15
HAND VIBRATOR (BDE)	16
MINIMUM LANE WIDTH WITH LANE CLOSURE (BDE)	16
MULTILANE PAVEMENT PATCHING (BDE)	16
PARTIAL PAYMENTS (BDE)	16
PAYMENTS TO SUBCONTRACTORS (BDE)	
PERSONAL PROTECTIVE EQUIPMENT (BDE)	18
PORTABLE CHANGEABLE MESSAGE SIGNS (BDE)	
PORTLAND CEMENT (BDE)	20
PORTLAND CEMENT CONCRETE (BDE)	20
PORTLAND CEMENT CONCRETE PATCHING (BDE)	21
PUBLIC CONVENIENCE AND SAFETY (BDE)	24
SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)	24
TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)	24
WORK ZONE PUBLIC INFORMATION SIGNS (BDE)	
WORK ZONE SPEED LIMIT SIGNS (BDE)	26
WORK ZONE TRAFFIC CONTROL (BDE)	26
WORK ZONE TRAFFIC CONTROL DEVICES (BDE)	27

STATE OF ILLINOIS

SPECIAL PROVISIONS

The following Special Provisions supplement the "Standard Specifications for Road and Bridge Construction," adopted January 1, 2002, the latest edition of the "Manual on Uniform Traffic Control Devices for Streets and Highways," and the "Manual of Test Procedures for Materials" in effect on the date of invitation for bids, and the Supplemental Specifications and Recurring Special Provisions indicated on the Check Sheet included herein which apply to and govern the construction of FAI Routes 57 & 64, D-7 Pavt. Patching 2005-3 in Jefferson County and in case of conflict with any part or parts of said Specifications, the said Special Provisions shall take precedence and shall govern.

LOCATION OF PROJECT

This project is located in Jefferson County on FAI 57/64 from the north tri-level to the south trilevel through the City of Mt. Vernon.

DESCRIPTION OF PROJECT

The work included in this section shall consist of Class A Patching, and any other work necessary to complete this section.

WORKING DAYS (BDE)

Effective: January 1, 2002

The Contractor shall complete the work within 20 working days.

TRAFFIC CONTROL PLAN

Traffic Control shall be in accordance with the applicable sections of the Standard Specifications for Roads and Bridge Construction, the applicable guidelines contained in the Illinois Manual on Uniform Traffic Control Devices for Streets and Highways, these Special Provisions and any special details and Highway Standards contained herein and in the plans.

All signs utilized for Traffic Control and Protection shall be new or shall have new sheeting on them. Any additional cost incurred in meeting this requirement shall be included in the cost of the contract.

Special attention is called to Articles 107.09, 107.14 and 107.15 of the Standard Specifications for Road and Bridge Construction, the following Highway Standards and Recurring Special Provisions relating to Traffic Control:

Highway Standards:

701400 701401 (Special) 701411

<u>Standard 701400</u> – This standard shall be used at the approach to actual lane closure.

<u>Standard 701401 (Special):</u> The following requirements in addition to Standard 701401 are applicable:

The work hours for patching shall start after 8:00 P.M. Monday through Thursday. All patching, curing cleanup and traffic control removal shall be completed and all lanes open to traffic before 8:00 A.M. of the next day. A minimum of 5 hours of curing is required for all patches in this area.

Direction Indicator Barricades will be required in all lane closure tapers.

All workers involved with the night patching operation will be required to wear high visibility leg and wrist bands while on the job.

Every operation is required to have a light tower capable of lighting the entire work area for each operation, which includes sawing, removal, pouring, finishing and covering. Vehicle lights or a small spotlight mounted on a vehicle shall not be considered a light tower.

One changeable message sign in each direction/approach will be required in addition to those required with Standard 701400. The messages and locations of these signs shall be determined by the Engineer.

The Department has other projects being constructed in the vicinity of Location # 1 which may require coordination of Traffic Control. The Contractor shall be responsible for covering conflicting signs or providing additional signs as determined by the Engineer. Any delays caused by this coordination or additional expense incurred shall be the sole responsibility of the contractor.

Special attention should be taken during the patching in the vicinity of the EB I-64/ SB I-57 merge. The details shown in the plans provide a general guideline on the Traffic Control and Protection for this area but adjustments may be made by the Engineer to maintain a safe environment for both the traveling public and the workers. The cost of implementing any changes made by the Engineer will be included in the cost of Traffic Control and Protection, Standard 701401 (Special) and no additional compensation shall be allowed.

Basis of Payment: This work will be paid for at the contract unit price LUMP SUM for TRAFFIC CONTROL AND PROTECTION, STANDARD 701401 (Special).

<u>Standard 701411:</u> This standard shall apply any time the right lane (driving lane) of FAI Routes 57 or 64 are closed in proximity to an exit or entrance ramp. Ramps shall remain open at all times.

The following items shall be adhered to during patching operations on ramps.

- 1. Construction shall be accomplished so as to leave at least one-half of the pavement and the adjacent shoulder open to traffic at all times.
- 2. Work shall be confined to the same side for the entire length of the ramp.

- 3. Type I or II barricades or drums at 50 foot centers shall be used at all times when the ramp width is restricted. A 100 foot taper of barricades or drums at 25 foot spacing shall be installed in advance of the work area.
- 4. The following signs shall be required in advance of the taper as directed by the Engineer:
 - a. "ROAD CONSTRUCTION AHEAD" (W20-1(0)-48).
 - b. "BARRICADE AHEAD" (W20-I100(0)-48).
 - c. "KEEP LEFT" (R4-7B-2430), OR "KEEP RIGHT" (R4-7A-2430).
 - d. "FLAGMAN AHEAD" (W20-7(0)-48), OR (W20-7A(0)-48).
- 5. A flagger or flaggers shall be required while any workers or equipment are on the pavement.
- 6. When traffic control is in place during non-working hours, flashing lights shall be installed above the first two warning signs and all barricades and/or drums shall have steady burn lights.

The Engineer will determine the required traffic control for any operation not covered above.

Traffic control will be measured and paid for as detailed above and no additional payment will be allowed for alterations of the traffic control standards as described above.

Basis of Payment: This work will be paid for at the contract unit price EACH for TRAFFIC CONTROL AND PROTECTION, STANDARD 701411 at the locations specified by the Engineer.

CALCIUM CHLORIDE ACCELERATOR FOR PORTLAND CEMENT CONCRETE PATCHING (BDE)

Effective: January 1, 2001

The Contractor has the option to use a calcium chloride accelerator for Class PP-1 or Class PP-2 concrete.

80031

CHAIR SUPPORTS (BDE)

Effective: November 1, 2002 Revised: November 2, 2002

Revise the fourth and fifth paragraphs of Article 421.06(a) to read:

"Pavement reinforcement shall be supported on steel chair supports at the depth below the pavement surface as indicated on the plans. The Contractor shall submit prints of shop drawings showing details of chair supports and their spacing to the Engineer and obtain the Engineer's approval before any fabrication is begun.

The chair supports shall possess the necessary rigidity and be spaced at intervals close enough to hold the reinforcement at the proper depth and position. However, the spacing of the chair supports shall not exceed 900 mm (3 ft) transversely or 1.2 m (4 ft) longitudinally. The chair supports shall be fabricated with sand plates."

80077

CONCRETE ADMIXTURES (BDE)

Effective: January 1, 2003 Revised: July 1, 2004

Revise Article 1020.05(b) of the Standard Specifications to read:

"(b) Admixtures. Except as specified, the use of admixtures to increase the workability or to accelerate the hardening of the concrete will be permitted only when approved in writing by the Engineer. The Department will maintain an Approved List of Concrete Admixtures. When the Department permits the use of a calcium chloride accelerator, it shall be according to Article 442.02, Note 5.

When the atmosphere or concrete temperature is 18 °C (65 °F) or higher, a retarding admixture meeting the requirements of Article 1021.03 shall be used in the Class BD Concrete and portland cement concrete bridge deck overlays. The amount of retarding admixture to be used will be determined by the Engineer. The proportions of the ingredients of the concrete shall be the same as without the retarding admixture except that the amount of mixing water shall be reduced, as may be necessary, in order to maintain the consistency of the concrete as required. In addition, a high range water-reducing admixture shall be used in Class BD Concrete. The amount of high range water-reducing admixture will be determined by the Engineer. At the option of the Contractor, a water-reducing admixture may be used. Type I cement shall be used.

For Class PC and PS Concrete, a retarding admixture may be added to the concrete mixture when the concrete temperature is 18 °C (65 °F) or higher. Other admixtures may be used when approved by the Engineer, or if specified by the contract. If an accelerating admixture is permitted by the Engineer, it shall be the non-chloride type.

At the Contractor's option, admixtures in addition to an air-entraining admixture may be used for Class PP-1 concrete. The accelerator shall be the non-chloride type. If a water-reducing or retarding admixture is used, the cement factor may be reduced a maximum 18 kg/cu m (0.30 hundredweight/cu yd). If a high range water-reducing admixture is used, the cement factor may be reduced a maximum 36 kg/cu m (0.60 hundredweight/cu yd). Cement factor reductions shall not be cumulative when using multiple admixtures. An accelerator shall always be added prior to a high range water-reducing admixture, if both are used.

If Class C fly ash or ground granulated blast-furnace slag is used in Class PP-1 concrete, a water-reducing or high range water-reducing admixture shall be used. However, the cement factor shall not be reduced if a water-reducing, retarding, or high range water-reducing admixture is used. In addition, an accelerator shall not be used.

For Class PP-2 or PP-3 concrete, a non-chloride accelerator followed by a high range water-reducing admixture shall be used, in addition to the air-entraining admixture. For Class PP-3 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-2 or PP-3 concrete, the Contractor has the option to use a water-reducing admixture. A retarding admixture shall not be used unless approved by the Engineer. A water-reducing, retarding, or high range water-reducing admixture shall not be used to reduce the cement factor.

When the air temperature is less than 13 °C (55 °F) for Class PP-1 or PP-2 concrete, the non-chloride accelerator shall be calcium nitrite.

For Class PP-4 concrete, a high range water-reducing admixture shall be used in addition to the air-entraining admixture. The Contractor has the option to use a water-reducing admixture. An accelerator shall not be used. For stationary or truck mixed concrete, a retarding admixture shall be used to allow for haul time. The Contractor has the option to use a mobile portland cement concrete plant according to Article 1103.04, but a retarding admixture shall not be used unless approved by the Engineer. A water-reducing, retarding, or high range water-reducing admixture shall not be used to reduce the cement factor.

If the Department specifies a calcium chloride accelerator for Class PP-1 concrete, the maximum chloride dosage shall be 1.0 L (1.0 quart) of solution per 45 kg (100 lb) of cement. The dosage may be increased to a maximum 2.0 L (2.0 quarts) per 45 kg (100 lb) of cement if approved by the Engineer. If the Department specifies a calcium chloride accelerator for Class PP-2 concrete, the maximum chloride dosage shall be 1.3 L (1.3 quarts) of solution per 45 kg (100 lb) of cement. The dosage may be increased to a maximum 2.6 L (2.6 quarts) per 45 kg (100 lb) of cement if approved by the Engineer.

For Class PV, MS, SI, RR, SC and SH concrete, at the option of the Contractor, or when specified by the Engineer, a water-reducing admixture or a retarding admixture may be used. The amount of water-reducing admixture or retarding admixture permitted will be determined by the Engineer. The air-entraining admixture and other admixtures shall be added to the concrete separately, and shall be permitted to intermingle only after they have separately entered the concrete batch. The sequence, method and equipment for adding the admixtures shall be approved by the Engineer. The water-reducing admixture shall not delay the initial set of the concrete by more than one hour. Type I cement shall be used.

When a water-reducing admixture is added, a cement factor reduction of up to 18 kg/cu m (0.30 hundredweight/cu yd), from the concrete designed for a specific slump without the admixture, will be permitted for Class PV, MS, SI, RR, SC and SH concrete. When an approved high range water-reducing admixture is used, a cement factor reduction of up to 36 kg/cu m (0.60 hundredweight/cu yd), from a specific water cement/ratio without the admixture, will be permitted based on a 14 percent minimum water reduction. This is applicable to Class PV, MS, SI, RR, SC and SH concrete. A cement factor below 320 kg/cu m (5.35 hundredweight/cu yd) will not be permitted for Class PV, MS, SI, RR, SC and SH concrete. A cement factor reduction will not be allowed for concrete placed underwater. Cement factor reductions shall not be cumulative when using multiple admixtures.

For use of admixtures to control concrete temperature, refer to Articles 1020.14(a) and 1020.14(b).

The maximum slumps given in Table 1 may be increased to 175 mm (7 in.) when a high range water-reducing admixture is used for all classes of concrete except Class PV and PP."

Revise Section 1021 of the Standard Specifications to read:

"SECTION 1021. CONCRETE ADMIXTURES"

1021.01 **General.** Admixtures shall be furnished in liquid form ready for use. The admixtures may be delivered in the manufacturer's original containers, bulk tank trucks or such containers or tanks as are acceptable to the Engineer. Delivery shall be accompanied by a ticket which clearly identifies the manufacturer and trade name of the material. Containers shall be readily identifiable to the satisfaction of the Engineer as to manufacturer and trade name of the material they contain.

Prior to inclusion of a product on the Department's Approved List of Concrete Admixtures, the manufacturer shall submit a report prepared by an independent laboratory accredited by the AASHTO Accreditation Program. The report shall show the results of physical tests conducted no more than five years prior to the time of submittal, according to applicable specifications.

Tests shall be conducted using materials and methods specified on a "test" concrete and a "reference" concrete, together with a certification that no changes have been made in the formulation of the material since the performance of the tests. Per the manufacturer's option, the cement content for all required tests shall either be according to applicable specifications or 335 kg/cu m (5.65 cwt/cu yd). Compressive strength test results for six months and one year will not be required.

In addition to the report, the manufacturer shall submit AASHTO T 197 water content and set time test results on the standard cement used by the Department. The test and reference concrete mixture shall contain a cement content of 335 kg/cu m (5.65 cwt/cu yd). The manufacturer may select their lab or an independent lab to perform this testing. The laboratory is not required to be accredited by the AASHTO Accreditation Program.

Prior to the approval of an admixture, the Engineer may conduct all or part of the applicable tests on a sample that is representative of the material to be furnished. The test and reference concrete mixtures tested by the Engineer will contain a cement content of 335 kg/cu m (5.65 cwt/cu yd). For freeze-thaw testing, the Department will perform the test according to Illinois Modified AASHTO T 161, Procedure B.

The manufacturer shall include in the submittal the following information according to ASTM C 494; the average and manufacturing range of specific gravity, the average and manufacturing range of solids in the solution, and the average and manufacturing range of pH. The submittal shall also include an infrared spectrophotometer trace no more than five years old.

When test results are more than seven years old, the manufacturer shall re-submit the infrared spectrophotometer trace and the report prepared by an independent laboratory accredited by the AASHTO Accreditation Program.

All admixtures, except chloride-based accelerators, shall contain no more than 0.3 percent chloride by mass (weight).

1021.02 Air-Entraining Admixtures. Air-entraining admixtures shall conform to the requirements of AASHTO M 154.

If the manufacturer certifies that the air-entraining admixture is an aqueous solution of Vinsol resin that has been neutralized with sodium hydroxide (caustic soda), testing for compliance with the requirements may be waived by the Engineer. In the certification, the manufacturer shall show complete information with respect to the formulation of the solution, including the number of parts of Vinsol resin to each part of sodium hydroxide. Before the approval of its use is granted, the Engineer will test the solution for its air-entraining quality in comparison with a solution prepared and kept for that purpose.

1021.03 Retarding and Water-Reducing Admixtures. The admixture shall comply with the following requirements:

- (a) The retarding admixture shall comply with the requirements of AASHTO M 194, Type B (retarding) or Type D (water-reducing and retarding).
- (b) The water-reducing admixture shall comply with the requirements of AASHTO M 194, Type A.
- (c) The high range water-reducing admixture shall comply with the requirements of AASHTO M 194, Type F (high range water-reducing) or Type G (high range water-reducing and retarding).

When a Type F or Type G high range water-reducing admixture is used, water-cement ratios shall be a minimum of 0.32.

Type F or Type G admixtures may be used, subject to the following restrictions:

For Class MS, SI, RR, SC and SH concrete, the water-cement ratio shall be a maximum of 0.44.

The Type F or Type G admixture shall be added at the jobsite unless otherwise directed by the Engineer. The initial slump shall be a minimum of 40 mm (1 1/2 in.) prior to addition of the Type F or Type G admixture, except as approved by the Engineer.

When a Type F or Type G admixture is used, retempering with water or with a Type G admixture will not be allowed. An additional dosage of a Type F admixture, not to exceed 40 percent of the original dosage, may be used to retemper concrete once, provided set time is not unduly affected. A second retempering with a Type F admixture may be used for all classes of concrete except Class PP and SC, provided that the dosage does not exceed the dosage used for the first retempering, and provided that the set time is not unduly affected. No further retempering will be allowed.

Air tests shall be performed after the addition of the Type F or Type G admixture.

1021.04 Set Accelerating Admixtures. The admixture shall comply with the requirements of AASHTO M 194, Type C (accelerating) or Type E (water reducing and accelerating)"

80094

CURING AND PROTECTION OF CONCRETE CONSTRUCTION (BDE)

Effective: January 1, 2004

Revise the second and third sentences of the eleventh paragraph of Article 503.06 of the Standard Specifications to read:

"Forms on substructure units shall remain in place at least 24 hours. The method of form removal shall not result in damage to the concrete."

Delete the twentieth paragraph of Article 503.22 of the Standard Specifications.

Revise the "Unit Price Adjustments" table of Article 503.22 of the Standard Specifications to read:

"UNIT PRICE ADJUSTMENTS	
Type of Construction	Percent Adjustment in Unit Price
For concrete in substructures, culverts (having a waterway opening of more than 1 sq m (10 sq ft)), pump houses, and retaining walls (except concrete pilings, footings and foundation seals): When protected by:	
Protection Method II Protection Method I	115% 110%
For concrete in superstructures: When protected by: Protection Method II Protection Method I	123% 115%
For concrete in footings: When protected by: Protection Method I, II or III	107%
For concrete in slope walls: When protected by: Protection Method I	107%"

Delete the fourth paragraph of Article 504.05(a) of the Standard Specifications.

Revise the second and third sentences of the fifth paragraph of Article 504.05(a) of the Standard Specifications to read:

"All test specimens shall be cured with the units according to Article 1020.13."

Revise the first paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"Curing and Low Air Temperature Protection. The curing and protection for precast, prestressed concrete members shall be according to Article 1020.13 and this Article."

Revise the first sentence of the second paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"For curing, air vents shall be in place, and shall be so arranged that no water can enter the void tubes during the curing of the members."

Revise the first sentence of the third paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"As soon as each member is finished, the concrete shall be covered with curing material according to Article 1020.13."

Revise the eighth paragraph of Article 504.06(c)(6) of the Standard Specifications to read:

"The prestressing force shall not be transferred to any member before the concrete has attained the compressive strength of 28,000 kPa (4000 psi) or other higher compressive release strength specified on the plans, as determined from tests of 150 mm (6 in.) by 300 mm (12 in.) cylinders cured with the member according to Article 1020.13. Members shall not be shipped until 28-day strengths have been attained and members have a vard age of at least 4 days."

Delete the third paragraph of Article 512.03(a) of the Standard Specifications.

Delete the last sentence of the second paragraph of Article 512.04(d) of the Standard Specifications.

Revise the "Index Table of Curing and Protection of Concrete Construction" table of Article 1020.13 of the Standard Specifications to read:

"INDEX TABLE OF (CURING AND PROTECTION OF	CONCRETE C	ONSTRUCTION
TYPE OF CONSTRUCTION	CURING METHODS	CURING PERIOD DAYS	LOW AIR TEMPERATURE PROTECTION METHODS
Cast-in-Place Concrete: 11/			
Pavement Shoulder	1020.13(a)(1)(2)(3)(4)(5) ^{3/5/}	3	1020.13(c)
Base Course Base Course Widening	1020.13(a)(1)(2)(3)(4)(5) ^{1/2/}	3	1020.13(c)
Driveway Median Curb Gutter Curb and Gutter Sidewalk Slope Wall	1020.13(a)(1)(2)(3)(4)(5) ^{4/5/}	3	1020.13(c) ^{16/}
Paved Ditch Catch Basin Manhole Inlet Valve Vault	1020.13(a)(1)(2)(3)(4)(5) ^{4/}	3	1020.13(c)
Pavement Patching	1020.13(a)(1)(2)(3)(4)(5) ^{2/}	3 ^{12/}	1020.13(c)
Pavement Replacement	1020.13(a)(1)(2)(3)(4)(5) ^{1/2/}	3	442.06(h) and 1020.13(c)
Railroad Crossing	1020.13(a)(3)(5)	1	1020.13(c)
Piles	1020.13(a)(3)(5)	7	1020.13(e)(1)(2)(3)
Footings Foundation Seals	1020.13(a)(1)(2)(3)(4)(5) ^{4/6/}	7	1020.13(e)(1)(2)(3)
Substructure	1020.13(a)(1)(2)(3)(4)(5) ^{1/7/}	7	1020.13(e)(1)(2)(3)
Superstructure (except deck)	1020.13(a)(1)(2)(3)(5) ^{8/}	7	1020.13(e)(1)(2)
Deck	1020.13(a)(5)	7	1020.13(e)(1)(2) ^{17/}
Retaining Walls	1020.13(a)(1)(2)(3)(4)(5) ^{1/7/}	7	1020.13(e)(1)(2)
Pump Houses	1020.13(a)(1)(2)(3)(4)(5) ^{1/}	7	1020.13(e)(1)(2)
Culverts	1020.13(a)(1)(2)(3)(4)(5) ^{4/6/}	7	1020.13(e)(1)(2) ^{18/}
Other Incidental Concrete	1020.13(a)(1)(2)(3)(5)	3	1020.13(c)
Precast Concrete: 11/			
Bridge Beams Piles Bridge Slabs Nelson Type Structural Member	1020.13(a)(3)(5) 9/10/	•	504.06(c)(6), 1020.13(e)(2) ^{19/}
All Other Precast Items	1020.13(a)(3)(4)(5) ^{2/9/10/}	As required. 14/	504.06(c)(6), 1020.13(e)(2) ^{19/}
Precast, Prestressed Concrete: 11/	\	1	
All Items	1020.13(a)(3)(5) ^{9/10/}		d504.06(c)(6), 1020.13(e)(2) ^{19/} s

Notes-General:

- 1/ Type I, membrane curing only
- 2/ Type II, membrane curing only
- 3/ Type III, membrane curing only
- 4/ Type I, II and III membrane curing
- 5/ Membrane curing will not be permitted between November 1 and April 15.
- 6/ The use of water to inundate footings, foundation seals or the bottom slab of culverts is permissible when approved by the Engineer, provided the water temperature can be maintained at 7 °C (45 °F) or higher.
- 7/ Asphalt Emulsion for Waterproofing may be used in lieu of other curing methods when specified and permitted according to Article 503.18.
- 8/ On non-traffic surfaces which receive protective coat according to Article 503.19, a linseed oil emulsion curing compound may be used as a substitute for protective coat and other curing methods. The linseed emulsion curing compound will be permitted between April 16 and October 31 of the same year, provided it is applied with a mechanical sprayer according to Article 1101.09 (b), and meets the material requirements of Article 1022.07.
- 9/ Steam curing (heat and moisture) is acceptable and shall be accomplished by the method specified in Article 504.06(c)(6).
- 10/ A moist room according to AASHTO M 201 is acceptable for curing.
- 11/ If curing is required and interrupted because of form removal for cast-in-place concrete items, precast concrete products, or precast prestressed concrete products, the curing shall be resumed within two hours from the start of the form removal.
- 12/ Curing maintained only until opening strength is attained, with a maximum curing period of three days.
- 13/ The curing period shall end when the concrete has attained the mix design strength. The producer has the option to discontinue curing when the concrete has attained 80 percent of the mix design strength or after seven days. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.
- 14/ The producer shall determine the curing period or may elect to not cure the product. All strength test specimens shall remain with the units and shall be subjected to the same curing method and environmental condition as the units, until the time of testing.
- 15/ The producer has the option to continue curing after strand release.
- 16/ When structural steel or structural concrete is in place above slope wall, Article 1020.13(c) shall not apply. The protection method shall be according to Article 1020.13(e)(1).
- 17/ When Article 1020.13(e)(2) is used to protect the deck, the housing may enclose only the bottom and sides. The top surface shall be protected according to Article 1020.13(e)(1).
- 18/ For culverts having a waterway opening of 1 sq m (10 sq ft) or less, the culverts may be protected according to Article 1020.13(e)(3).
- 19/ The seven day protection period in the first paragraph of Article 1020.13(e)(2) shall not apply. The protection period shall end when curing is finished. For the third paragraph of Article 1020.13(e)(2), the decrease in temperature shall be according to Article 504.06(c)(6)."

Add the following to Article 1020.13(a) of the Standard Specifications:

"(5) Wetted Cotton Mat Method. After the surface of concrete has been textured or finished, it shall be covered immediately with dry cotton mats. The cotton mats shall be placed in a manner which will not mar the concrete surface. A texture resulting from the cotton mat material is acceptable. The cotton mats shall then be wetted immediately and thoroughly soaked with a gentle spray of water. For bridge decks, a foot bridge shall be used to place and wet the cotton mats.

The cotton mats shall be maintained in a wetted condition until the concrete has hardened sufficiently to place soaker hoses without marring the concrete surface. The soaker hoses shall be placed on top of the cotton mats at a maximum 1.2 m (4 ft) spacing. The cotton mats shall be kept wet with a continuous supply of water for the remainder of the curing period. Other continuous wetting systems may be used if approved by the Engineer.

After placement of the soaker hoses, the cotton mats shall be covered with white polyethylene sheeting or burlap-polyethylene blankets.

For construction items other than bridge decks, soaker hoses or a continuous wetting system will not be required if the alternative method keeps the cotton mats wet. Periodic wetting of the cotton mats is acceptable.

For areas inaccessible to the cotton mats on bridge decks, curing shall be according to Article 1020.13(a)(3)."

Revise the first paragraph of Article 1020.13(c) of the Standard Specifications to read:

"Protection of Portland Cement Concrete, Other Than Structures, From Low Air Temperatures. When the official National Weather Service forecast for the construction area predicts a low of 0 °C (32 °F), or lower, or if the actual temperature drops to 0 °C (32 °F), or lower, concrete less than 72 hours old shall be provided at least the following protection:"

Delete Article 1020.13(d) and Articles 1020.13(d)(1),(2),(3),(4) of the Standard Specifications.

Revise the first five paragraphs of Article 1020.13(e) of the Standard Specifications to read:

"Protection of Portland Cement Concrete Structures From Low Air Temperatures. When the official National Weather Service Forecast for the construction area predicts a low below 7 °C (45 °F), or if the actual temperature drops below 7 °C (45 °F), concrete less than 72 hours old shall be provided protection. Concrete shall also be provided protection when placed during the winter period of December 1 through March 15. Concrete shall not be placed until the materials, facilities and equipment for protection are approved by the Engineer.

When directed by the Engineer, the Contractor may be required to place concrete during the winter period. If winter construction is specified, the Contractor shall proceed with the construction, including concrete, excavation, pile driving, steel erection and all appurtenant work required for the complete construction of the item, except at times when weather conditions make such operations impracticable.

Regardless of the precautions taken, the Contractor shall be responsible for protection of the concrete placed and any concrete damaged by cold temperatures shall be removed and replaced by the Contractor at his/her own expense."

Add the following at the end of the third paragraph of Article 1020.13(e)(1) of the Standard Specifications:

"The Contractor shall provide means for checking the temperature of the surface of the concrete during the protection period."

Revise the second sentence of the first paragraph of Article 1020.13(e)(2) of the Standard Specifications to read:

"The Contractor shall provide means for checking the temperature of the surface of the concrete or air temperature within the housing during the protection period."

Delete the last sentence of the first paragraph of Article 1020.13(e)(3) of the Standard Specifications.

Add the following Article to Section 1022 of the Standard Specifications:

"1022.06 Cotton Mats. Cotton mats shall consist of a cotton fill material, minimum 400 g/sq m (11.8 oz/sq yd), covered with unsized cloth or burlap, minimum 200 g/sq m (5.9 oz/sq yd), and be tufted or stitched to maintain stability.

Cotton mats shall be in a condition satisfactory to the Engineer. Any tears or holes in the mats shall be repaired.

Add the following Article to Section 1022 of the Standard Specifications:

"1022.07 Linseed Oil Emulsion Curing Compound. Linseed oil emulsion curing compound shall be composed of a blend of boiled linseed oil and high viscosity, heavy bodied linseed oil emulsified in a water solution. The curing compound shall meet the requirements of a Type I, II, or III according to Article 1022.01, except the drying time requirement will be waived. The oil phase shall be 50 ± 4 percent by volume. The oil phase shall consist of 80 percent by mass (weight) boiled linseed oil and 20 percent by mass (weight) Z-8 viscosity linseed oil. The water phase shall be 50 ± 4 percent by volume."

Revise Article 1020.14 of the Standard Specifications to read:

"1020.14 Temperature Control for Placement. Temperature control for concrete placement shall conform to the following requirements:

(a) Temperature Control other than Structures. The temperature of concrete immediately before placing, shall be not less than 10 °C (50 °F) nor more than 32 °C (90 °F). Aggregates and/or water shall be heated or cooled as necessary to produce concrete within these temperature limits.

When the temperature of the plastic concrete reaches 30 °C (85 °F), an approved retarding admixture shall be used or the approved water reducing admixture in use shall have its dosage increased by 50 percent over the dosage recommended on the Department's Approved List of Concrete Admixtures for the temperature experienced. The amount of retarding admixture to be used will be determined by the Engineer. This requirement may be waived by the Engineer when fly ash compensated mixtures are used.

Plastic concrete temperatures up to 35 °C (96 °F), as placed, may be permitted provided job site conditions permit placement and finishing without excessive use of water on and/or overworking of the surface. The occurrence within 24 hours of unusual surface distress shall be cause to revert to a maximum 32 °C (90 °F) plastic concrete temperature.

Concrete shall not be placed when the air temperature is below 5 °C (40 °F) and falling or below 2 °C (35 °F), without permission of the Engineer. When placing of concrete is authorized during cold weather, the Engineer may require the water and/or the aggregates to be heated to not less than 20 °C (70 °F) nor more than 65 °C (150 °F). The aggregates may be heated by either steam or dry heat prior to being placed in the mixer. The apparatus used shall heat the mass uniformly and shall be so arranged as to preclude the possible occurrence of overheated areas which might damage the materials. No frozen aggregates shall be used in the concrete.

For pavement patching, refer to Article 442.06(e) for additional information on temperature control for placement.

(b) Temperature Control for Structures. The temperature of concrete as placed in the forms shall be not less than 10 °C (50 °F) nor more than 32 °C (90 °F). Aggregates and/or water shall be heated or cooled as necessary to produce concrete within these temperature limits. When insulated forms are used, the temperature of the concrete mixture shall not exceed 25 °C (80 °F). If the Engineer determines that heat of hydration might cause excessive temperatures in the concrete, the concrete shall be placed at a temperature between 10 °C (50 °F) and 15 °C (60 °F), per the Engineer's instructions. When concrete is placed in contact with previously placed concrete, the temperature of the concrete may be increased as required to offset anticipated heat loss.

Concrete shall not be placed when the air temperature is below 7 °C (45 °F) and falling or below 4 °C (40 °F), without permission of the Engineer. When placing of concrete is authorized during cold weather, the Engineer may require the water and/or the aggregates to be heated to not less than 20 °C (70 °F) nor more than 65 °C (150 °F). The aggregates may be heated by either steam or dry heat prior to being placed in the mixer. The apparatus used shall heat the mass uniformly and shall be so arranged as to preclude the possible occurrence of overheated areas which might damage the materials. No frozen aggregates shall be used in the concrete.

When the temperature of the plastic concrete reaches 30 °C (85 °F), an approved retarding admixture shall be used or the approved water reducing admixture in use shall have its dosage increased by 50 percent over the dosage recommended on the Department's Approved List of Concrete Admixtures for the temperature experienced. The amount of retarding admixture to be used will be determined by the Engineer. This requirement may be waived by the Engineer when fly ash compensated mixtures are used.

(c) Temperature. The concrete temperature shall be determined according to ASTM C 1064."

80114

EPOXY COATING ON REINFORCEMENT (BDE)

Effective: April 1, 1997 Revised: January 1, 2003

For work outside the limits of bridge approach pavement, all references to epoxy coating in the Highway Standards and Standard Specifications for reinforcement, tie bars and chair supports will not apply for pavement, shoulders, curb, gutter, combination curb and gutter and median. 31578

FLAGGER VESTS (BDE)

Effective: April 1, 2003 Revised: April 1, 2005

Revise the first sentence of Article 701.04(c)(1) of the Standard Specifications to read:

"The flagger shall be stationed to the satisfaction of the Engineer and be equipped with a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments and approved flagger traffic control signs conforming to Standard 702001 and Article 702.05(e)."

Revise Article 701.04(c)(6) of the Standard Specifications to read:

"(6) Nighttime Flagging. The flagger station shall be lit by additional overhead lighting other than streetlights. The flagger shall be equipped with a fluorescent orange, fluorescent yellow/green, or a combination of fluorescent orange and fluorescent yellow/green garment meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 3 garments."

HAND VIBRATOR (BDE)

Effective: November 1, 2003

Add the following paragraph to Article 1103.17(a) of the Standard Specifications:

"The vibrator shall have a non-metallic head for areas containing epoxy coated reinforcement. The head shall be coated by the manufacturer. The hardness of the non-metallic head shall be less than the epoxy coated reinforcement, resulting in no damage to the epoxy coating. Slip-on covers will not be allowed."

80054

MINIMUM LANE WIDTH WITH LANE CLOSURE (BDE)

Effective: January 1, 2005

Add the following paragraph after the eighth paragraph of Article 701.04(a) of the Standard Specifications.

"The minimum lane width adjacent to a closed lane during paving, patching, and other moving operations on freeways and expressways shall be a minimum of 3 m (10 ft). The 3 m (10 ft) shall be clear, unobstructed, and free of channelizing devices or other obstacles."

80137

MULTILANE PAVEMENT PATCHING (BDE)

Effective: November 1, 2002

Pavement broken and holes opened for patching shall be completed prior to weekend or holiday periods. Should delays of any type or for any reason prevent the completion of the work, temporary patches shall be constructed. Material able to support the average daily traffic and meeting the approval of the Engineer shall be used for the temporary patches. The cost of furnishing, placing, maintaining, removing and disposing of the temporary work, including traffic control, shall be the responsibility of the Contractor.

80082

PARTIAL PAYMENTS (BDE)

Effective: September 1, 2003

Revise Article 109.07 of the Standard Specifications to read:

"109.07 Partial Payments. Partial payments will be made as follows:

(a) Progress Payments. At least once each month, the Engineer will make a written estimate of the amount of work performed in accordance with the contract, and the value thereof at the contract unit prices. The amount of the estimate approved as due for payment will be vouchered by the Department and presented to the State Comptroller for payment. No amount less than \$1000.00 will be approved for payment other than the final payment.

The failure to perform any requirement, obligation, or term of the contract by the Contractor shall be reason for withholding any progress payments until the Department determines that compliance has been achieved. Furthermore, progress payments may be reduced by liens filed pursuant to Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c).

(b) Material Allowances. At the discretion of the Department, payment may be made for materials, prior to their use in the work, when satisfactory evidence is presented by the Contractor. Satisfactory evidence includes justification for the allowance (to expedite the work, meet project schedules, regional or national material shortages, etc.), documentation of material and transportation costs, and evidence that such material is properly stored on the project or at a secure location acceptable and accessible to the Department.

Material allowances will be considered only for nonperishable materials when the cost, including transportation, exceeds \$10,000 and such materials are not expected to be utilized within 60 days of the request for the allowance. For contracts valued under \$500,000, the minimum \$10,000 requirement may be met by combining the principal (material) product of no more than two contract items. An exception to this two item limitation may be considered for any contract regardless of value for items in which material (products) are similar except for type and/or size.

Material allowances shall not exceed the value of the contract items in which used and shall not include the cost of installation or related markups. Amounts paid by the Department for material allowances will be deducted from estimates due the Contractor as the material is used. Two-sided copies of the Contractor's cancelled checks for materials and transportation must be furnished to the Department within 60 days of payment of the allowances or the amounts will be reclaimed by the Department."

80116

PAYMENTS TO SUBCONTRACTORS (BDE)

Effective: June 1, 2000 Revised: September 1, 2003

Federal regulations found at 49 CFR §26.29 mandate the Department to establish a contract clause to require Contractors to pay subcontractors for satisfactory performance of their subcontracts no later than 30 days from the receipt of each payment made to the Contractor.

State law addresses the timing of payments to be made to subcontractors. Section 7 of the Prompt Payment Act, 30 ILCS 540/7, generally requires that when a Contractor receives any payment from the Department, the Contractor is required to make corresponding, proportional payments to each subcontractor performing work within 15 calendar days after receipt of the state payment. Section 7 of the State Prompt Payment Act further provides that interest in the amount of 2% per month, in addition to the payment due, shall be paid to any subcontractor by the Contractor if the payment required by the Act is withheld or delayed without reasonable cause. The Act also provides that the time for payment required and the calculation of any interest due applies to transactions between subcontractors and lower-tier subcontractors throughout the contracting chain.

This Special Provision establishes the required federal contract clause, and adopts the 15 calendar day requirement of the Act for purposes of compliance with the federal regulation regarding payments to subcontractors. This contract is subject to the following payment obligations.

As progress payments are made to the Contractor in accordance with Article 109.07 of the Standard Specifications for Road and Bridge Construction, the Contractor shall make a corresponding partial payment within 15 calendar days to each subcontractor in proportion to the work satisfactorily completed by each subcontractor. The proportionate amount of partial payment due to each subcontractor shall be determined by the quantities measured or otherwise determined as eligible for payment by the Department and included in the progress payment to the Contractor. Subcontractors shall be paid in full within 15 calendar days after the subcontractor's work has been satisfactorily completed. The Contractor shall hold no retainage from the subcontractors.

This Special Provision does not create any rights in favor of any subcontractor against the State of Illinois or authorize any cause of action against the State of Illinois on account of any payment, nonpayment, delayed payment or interest claimed by application of the State Prompt Payment Act. The Department will neither determine the reasonableness of any cause for delay of payment nor enforce any claim to payment, including interest. Moreover, the Department will not approve any delay or postponement of the 15 day requirement. State law creates remedies available to any subcontractor or material supplier, regardless of tier, who has not been paid for work properly performed or material furnished. These remedies are a lien against public funds set forth in Section 23(c) of the Mechanics Lien Act, 770 ILCS 60/23(c), and a recovery on the Contractor's payment bond in accordance with the Public Construction Bond Act, 30 ILCS 550.

80022

PERSONAL PROTECTIVE EQUIPMENT (BDE)

Effective: July 1, 2004

All personnel, excluding flaggers, working outside of a vehicle (car or truck) within 7.6 m (25 ft) of pavement open to traffic shall wear a fluorescent orange, fluorescent yellow/green or a combination of fluorescent orange and fluorescent yellow/.green vest meeting the requirements of the American National Standards Institute specification ANSI/ISEA 107-1999 for Conspicuity Class 2 garments. Other types of garments may be substituted for the vest as long as the garments have manufacturers tags identifying them as meeting the ANSI Class 2 requirement.

PORTABLE CHANGEABLE MESSAGE SIGNS (BDE)

Effective: November 1, 1993

Revised: April 2, 2004

<u>Description</u>. This work shall consist of furnishing, placing, and maintaining changeable message sign(s) at the locations(s) shown on the plans or as directed by the Engineer.

The sign(s) shall be trailer mounted. The message panel shall be at least 2.1 m (7 ft) above the pavement, present a level appearance, and be capable of displaying up to eight characters in each of three lines at a time. Character height shall be 450 mm (18 in.).

The message panel shall be of either a bulb matrix or disc matrix design controlled by an onboard computer capable of storing a minimum of 99 programmed messages for instant recall. The computer shall be capable of being programmed to accept messages created by the operator via an alpha-numeric keyboard and able to flash any six messages in sequence. The message panel shall also be capable of being controlled by a computer from a remote location via a cellular linkage. The Contractor shall supply the modem, the cellular phone, and the necessary software to run the sign from a remote computer at a location designated by the Engineer. The Contractor shall promptly program and/or reprogram the computer to provide the messages as directed by the Engineer.

The message panel shall be visible from 400 m (1/4 mile) under both day and night conditions. The letters shall be legible from 250 m (750 ft).

The sign shall include automatic dimming for nighttime operation and a power supply capable of providing 24 hours of uninterrupted service.

The Contractor shall provide all preventive maintenance efforts s(he) deems necessary to achieve uninterrupted service. If service is interrupted for any cause and not restored within 24 hours, the Engineer will cause such work to be performed as may be necessary to provide this service. The cost of such work shall be borne by the Contractor or deducted from current or future compensation due the Contractor.

When the sign(s) are displaying messages, they shall be considered a traffic control device. At all times when no message is displayed, they shall be considered equipment.

<u>Basis of Payment</u>. When portable changeable message signs are shown on the Standard, this work will not be paid for separately but shall be considered as included in the cost of the Standard.

For all other portable changeable message signs, this work will be paid for at the contract unit price per calendar month for each sign as CHANGEABLE MESSAGE SIGN.

PORTLAND CEMENT (BDE)

Effective: January 1, 2005

Replace the first sentence of the second paragraph of Article 1001.01 of the Standard Specifications with the following:

"For portland cement according to ASTM C 150, the addition of up to 5.0 percent limestone by mass (weight) to the cement will not be permitted. Also, the total of all organic processing additions shall not exceed 1.0 percent by mass (weight) of the cement and the total of all inorganic processing additions shall not exceed 4.0 percent by mass (weight) of the cement."

80139

PORTLAND CEMENT CONCRETE (BDE)

Effective: November 1, 2002

Add the following paragraph after the fourth paragraph of Article 1103.01(b) of the Standard Specifications:

"The truck mixer shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Add the following paragraph after the first paragraph of Article 1103.01(c) of the Standard Specifications:

"The truck agitator shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Add the following paragraph after the first paragraph of Article 1103.01(d) of the Standard Specifications:

"The nonagitator truck shall be approved before use according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

Revise the first sentence of the first paragraph of Article 1103.02 of the Standard Specifications to read:

"The plant shall be approved before production begins according to the Bureau of Materials and Physical Research's Policy Memorandum, "Approval of Concrete Plants and Delivery Trucks"."

PORTLAND CEMENT CONCRETE PATCHING (BDE)

Effective: January 1, 2001 Revised: January 1, 2004

Revise Note 1 of Article 442.02 of the Standard Specifications, to read:

"Note 1. When patching ramp pavements and two lane pavements with two way traffic, Class PP-2, PP-3, or PP-4 concrete shall be used for Class A, Class B and Class C patching. For all other pavements, Class PP-1, PP-2, PP-3, or PP-4 concrete shall be used, at the Contractor's option, for Class A, Class B and Class C patching."

Delete Note 2 of Article 442.02 of the Standard Specifications.

Add the following to Article 442.02 of the Standard Specifications:

"(I) Calcium Chloride (Note 5).......1013.01

Note 5. The calcium chloride accelerator, when permitted by the Department, shall be Type L (Liquid) with a minimum of 32.0 percent by mass (weight) of calcium chloride."

Revise the first paragraph of Article 442.06(e) of the Standard Specifications to read:

"(e) Concrete Placement. For Class A, Class B and Class C Patches, concrete shall be placed according to Article 420.07 and governed by the limitations set forth in Article 1020.14, except that the maximum temperature of the mixed concrete immediately before placing shall be 35 °C (96 °F), the required use of an approved retarding admixture when the plastic concrete reaches 30 °C (85 °F) shall not apply."

Revise the first paragraph of Article 442.06(h) of the Standard Specifications to read:

"(h) Curing and Protection. In addition to Article 1020.13, when the air temperature is less than 13 °C (55 °F), the Contractor shall cover the patch with minimum R12 insulation until opening strength is reached. Insulation is optional when the air temperature is 13 °C - 35 °C (55 °F - 96 °F). Insulation shall not be placed when the air temperature is greater than 35 °C (96 °F)."

Revise the second paragraph of Article 701.05(e)(1)d.1. of the Standard Specifications to read:

"No open holes, broken pavement, or partially filled holes shall remain overnight for bituminous patching or when the Department specifies only Class PP-2, PP-3, or PP-4 concrete be used. The only exception is conditions beyond the control of the Contractor."

Revise Article 701.05(e)(2)b. of the Standard Specifications to read:

"b. Strength Tests. For patches constructed with Class PP-1, PP-2, PP-3, or PP-4 concrete, the pavement may be opened to traffic when test specimens cured with the patches have obtained a minimum flexural strength of 4150 kPa (600 psi) or a minimum compressive strength of 22,100 kPa (3200 psi) according to Article 1020.09.

For patches constructed with Class PP-2, PP-3, or PP-4 concrete which can obtain a minimum flexural strength of 4150 kPa (600 psi) or a minimum of compressive strength of 22,100 kPa (3200 psi) in 16 hours, the pavement may be opened to traffic at a lower opening strength. The specimens cured with the patches shall have obtained a minimum flexural strength of 2050 kPa (300 psi) or a minimum compressive strength of 11,000 kPa (1600 psi) according to Article 1020.09, to permit opening pavement to traffic.

With the approval of the Engineer, concrete strength may be determined according to AASHTO T 276. The strength-maturity relationship shall be developed from concrete which has an air content near the upper specification limit. The strength-maturity relationship shall be re-established if the mix design or materials are changed."

Revise Article 701.05(e)(2)c. of the Standard Specifications to read:

"c. Construction Operations. For Class PP-2, PP-3, or PP-4 concrete used on ramp pavements and two lane pavements with two way traffic, or when the Department specifies only Class PP-2, PP-3, or PP-4 concrete be used for other pavements, Contractor construction operations shall be performed in a manner which allows the patches to be opened the same day and before nightfall. If patches are not opened before nightfall, the additional traffic control shall be at the Contractor's expense. Any time patches cannot be opened before nightfall, the Contractor shall change subsequent construction operations or the mix design. The changes shall be at no additional cost to the Department."

Revise Table 1 of Article 1020.04 of the Standard Specifications by replacing Class PP concrete with the following:

"TABLE	1. CLASSES OF PORT	LAND CEMENT	CONCRETE AND MIX DESIG	GN CRITERIA
Class of Concrete	Use	Specification Section Reference	Cement Factor kg/cu m (cwt/cu yd)	Max. Water/Cement Ratio kg/kg (lb/lb)
PP-1	PCC Pavement Patching Bridge Deck Patching	442	Type I Cement 385 to 445 (6.50 to 7.50) Type III Cement 365 to 425 (6.20 to 7.20)	0.44

PP-2	PCC Pavement Patching Bridge Deck Patching	442	Type I Cement 435 (7.35)	0.38
PP-3	PCC Pavement Patching Bridge Deck Patching	442	Type III Cement 435 (7.35)	0.35
PP-4	PCC Pavement Patching Bridge Deck Patching	442	Rapid Hardening Cement 355 to 370 (6.00 to 6.25)	0.50

For PP-1, the Contractor has the option to replace the Type I Cement with Class C fly ash or ground granulated blast-furnace slag. The amount of cement replaced shall not exceed 15 percent by mass (weight), at a minimum replacement ratio of 1.5:1.

For PP-2, the Contractor has the option to replace the Type I cement with ground granulated blast-furnace slag. The amount of cement replaced shall not exceed 30 percent by mass (weight), at a minimum replacement ratio of 1:1.

For PP-3, in addition to the cement, 60 kg/cu m (100 lb/cu yd) of ground granulated blast-furnace slag and 30 kg/cu m (50 lb/cu yd) of microsilica are required. For an air temperature greater than 30 $^{\circ}$ C (85 $^{\circ}$ F), the Contractor has the option to replace the Type III cement with Type I cement.

For PP-4, the cement shall be from the Department's "Approved List of Packaged, Dry, Rapid Hardening Cementitious Materials for Concrete Repairs".

TABLE 1.	(CONT'D)	CLASSES OF PORTLAND	CEMENT CONCRET	E AND MIX	DESIGN CRITERIA
Class of Concrete	Slump, mm (in.)	Mix Design Compressive Strength, kPa (psi) Hours 48	Mix Design Flexural Strength, kPa (psi) Hours 48	Air Content, %	Coarse Aggregate Gradations Permitted
PP – 1	100 (4) Max	22,100 (3200)	4150 (600)	4.0 – 7.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 2	150 (6) Max	22,100 (3200)	4150 (600)	4.0 – 6.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 3	100 (4) Max	22,100 (3200)	4150 (600)	4.0 – 6.0	CA-7, CA-11, CA-13, CA14, or CA-16
PP – 4	150 (6) Max	22,100 (3200)	4150 (600)	4.0 – 6.0	CA-7, CA-11, CA-13, CA14, or CA-16

For PP-1, PP-2, PP-3 or PP-4; only CA-13, CA-14, or CA-16 may be used for bridge deck patching. In addition, the mix design strength at 48 hours shall be increased to 27,500 kPa (4,000 psi) compressive or 4,650 kPa (675 psi) flexural for bridge deck patching.

For PP-1, the slump may be increased to 150 mm (6 in.) Max if a high range water-reducing admixture is used."

Delete Article 1020.05(g) of the Standard Specifications. 80036

PUBLIC CONVENIENCE AND SAFETY (BDE)

Effective: January 1, 2000

Add the following paragraph after the fourth paragraph of Article 107.09 of the Standard Specifications.

"On weekends, excluding holidays, roadways with Average Daily Traffic of 25,000 or greater, all lanes shall be open to traffic from 3:00 P.M. Friday to midnight Sunday except where structure construction or major rehabilitation makes it impractical."

80015

SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE)

Effective: April 2, 2005

To account for the preparatory work and operations necessary for the movement of subcontractor personnel, equipment, supplies, and incidentals to the project site and for all other work or operations that must be performed or costs incurred when beginning work approved for subcontracting in accordance with Article 108.01 of the Standard Specifications, the Contractor shall make a mobilization payment to each subcontractor.

This mobilization payment shall be made at least 14 days prior to the subcontractor starting work. The amount paid shall be equal to 3 percent of the amount of the subcontract reported on form BC 260A submitted for the approval of the subcontractor's work.

This provision shall be incorporated directly or by reference into each subcontract approved by the Department.

80143

TRAFFIC CONTROL DEFICIENCY DEDUCTION (BDE)

Effective: April 1, 1992 Revised: January 1, 2005

To ensure a prompt response to incidents involving the integrity of work zone traffic control, the Contractor shall provide a telephone number where a responsible individual can be contacted 24 hours-a-day.

When the Engineer is notified, or determines a traffic control deficiency exists, he/she will notify and direct the Contractor to correct the deficiency within a specified time. The specified time, which begins upon notification to the Contractor, will be from 1/2 hour to 12 hours based upon the urgency of the situation and the nature of the deficiency. The Engineer shall be the sole judge.

A deficiency may be any lack of repair, maintenance, or non-compliance with the traffic control plan. A deficiency may also be applied to situations where corrective action is not an option such as the use of non-certified flaggers for short term operations; working with lane closures beyond the time allowed in the contract; or failure to perform required contract obligations such as traffic control surveillance.

If the Contractor fails to correct a deficiency within the specified time, a daily monetary deduction will be imposed for each calendar day or fraction thereof the deficiency exists. The calendar day(s) will begin with notification to the Contractor and end with the Engineer's acceptance of the correction. The daily monetary deduction will be either \$1,000 or 0.05 percent of the awarded contract value, whichever is greater. For those deficiencies where corrective action was not an option this monetary deduction will be immediate.

In addition, if the Contractor fails to respond, the Engineer may correct the deficiency and the cost thereof will be deducted from monies due or which may become due the Contractor. This corrective action will in no way relieve the Contractor of his/her contractual requirements or responsibilities.

57291

WORK ZONE PUBLIC INFORMATION SIGNS (BDE)

Effective: September 1, 2002 Revised: January 1, 2005

<u>Description</u>. This work shall consist of furnishing, erecting, maintaining, and removing work zone public information signs.

Camera-ready artwork for the signs will be provided to sign manufacturing companies upon request by contacting the Central Bureau of Operations at 217-782-2076. The sign number is W21-I116-6048.

<u>Freeways/Expressways</u>. These signs are required on freeways and expressways. The signs shall be erected as shown on Highway Standard 701400 and according to Article 702.05(a) of the Standard Specifications.

<u>All Other Routes</u>. These signs shall be used on other routes when specified on the plans. They shall be erected in pairs midway between the first and second warning signs.

<u>Basis of Payment</u>. This work will not be paid for separately but shall be considered as included in the cost of the Standard.

WORK ZONE SPEED LIMIT SIGNS (BDE)

Effective: April 2, 2004 Revised: April 15, 2004

Delete Article 702.05(c).

Revise Article 702.05(d) to read:

"(d) Work Zone Speed Limit Signs. Work zone speed limit sign assemblies shall be provided and located as shown on the plans. Two additional assemblies shall be placed 150 m (500 ft) beyond the last entrance ramp for each interchange. The individual signs that make up an assembly may be combined on a single panel. The sheeting for the signs shall be reflective and conform to the requirements of Article 1084.02.

All permanent "SPEED LIMIT" signs located within the work zone shall be removed or covered. This work shall be coordinated with the lane closure(s) by promptly establishing a reduced posted speed zone when the lane closure(s) are put into effect and promptly reinstating the posted speed zone when the lane closure(s) are removed.

The work zone speed limit signs and end work zone speed limit signs shown in advance of and at the end of the lane closure(s) shall be used for the entire duration of the closure(s).

The work zone speed limit signs shown within the lane closure(s) shall only be used when workers are present in the closed lane adjacent to traffic; at all other times, the signs shall be promptly removed or covered. The sign assemblies shown within the lane closure(s) will not be required when the worker(s) are located behind a concrete barrier wall.

80125

WORK ZONE TRAFFIC CONTROL (BDE)

Effective: April 2, 2004 Revised: January 2, 2005

Revise the first paragraph of Article 701.07(b) to read:

"(b) Standards 701401, 701422, and 701446 will be measured for payment on an each basis only when the traffic control and protection applies to isolated stationary work areas and does not involve or is not a part of other protected areas."

Revise the Article 701.07(c) to read:

"(c) Measured As Lump Sum. Traffic control and protection required under Standards 701201, 701206, 701306, 701326, 701336, 701400, 701406, 701421, 701501, 701502, 701601, 701602, 701606, 701701 and 701801 will be measured for payment on a lump sum basis. Traffic control protection required under Standards 701401, 701422, and 701446 will be measured for payment on a lump sum basis, except as specified under Article 701.07(b). Where the Contractor's operations result in daily changing, or two or more work areas each of which requires traffic control according to one of the above Standards, each work area installation will not be paid for separately, but shall be included in the lump sum price for the type of protection furnished."

Revise the first paragraph of Article 701.08(a) to read:

"(a) Traffic control and protection will be paid for at the contract unit price each for TRAFFIC CONTROL AND PROTECTION STANDARD 701316; TRAFFIC CONTROL AND PROTECTION STANDARD 701321; TRAFFIC CONTROL AND PROTECTION STANDARD 701431; TRAFFIC CONTROL AND PROTECTION STANDARD 701401; TRAFFIC CONTROL AND PROTECTION STANDARD 701402; TRAFFIC CONTROL AND PROTECTION STANDARD 701411; TRAFFIC CONTROL AND PROTECTION STANDARD 701422; TRAFFIC CONTROL AND PROTECTION STANDARD 701423; TRAFFIC CONTROL AND PROTECTION STANDARD 701431; or TRAFFIC CONTROL AND PROTECTION STANDARD 701446 at the location specified."

Revise the first paragraph of Article 701.08(b) to read:

"(b) Traffic control and protection indicated in Article 701.07(c) will be paid for at the contract lump sum price for TRAFFIC CONTROL AND PROTECTION STANDARD 701201; TRAFFIC CONTROL AND PROTECTION STANDARD 701206; TRAFFIC CONTROL AND PROTECTION STANDARD 701326; TRAFFIC CONTROL AND PROTECTION STANDARD 701326; TRAFFIC CONTROL AND PROTECTION STANDARD 701400; TRAFFIC CONTROL AND PROTECTION STANDARD 701401; TRAFFIC CONTROL AND PROTECTION STANDARD 701421; TRAFFIC CONTROL AND PROTECTION STANDARD 701422; TRAFFIC CONTROL AND PROTECTION STANDARD 701422; TRAFFIC CONTROL AND PROTECTION STANDARD 701502; TRAFFIC CONTROL AND PROTECTION STANDARD 701502; TRAFFIC CONTROL AND PROTECTION STANDARD 701601; TRAFFIC CONTROL AND PROTECTION STANDARD 701601; TRAFFIC CONTROL AND PROTECTION STANDARD 701601; TRAFFIC CONTROL AND PROTECTION STANDARD 701701; or TRAFFIC CONTROL AND PROTECTION STANDARD 701701;

80126

WORK ZONE TRAFFIC CONTROL DEVICES (BDE)

Effective: January 1, 2003 Revised: November 1, 2004

Add the following to Article 702.01 of the Standard Specifications:

"All devices and combinations of devices shall meet the requirements of the National Cooperative Highway Research Program (NCHRP) Report 350 for their respective categories. The categories are as follows:

Category 1 includes small, lightweight, channelizing and delineating devices that have been in common use for many years and are known to be crashworthy by crash testing of similar devices or years of demonstrable safe performance. These include cones, tubular markers, flexible delineators and plastic drums with no attachments. Category 1 devices shall be crash tested and accepted or may be self-certified by the manufacturer.

Category 2 includes devices that are not expected to produce significant vehicular velocity change but may otherwise be hazardous. These include drums and vertical panels with lights, barricades and portable sign supports. Category 2 devices shall be crash tested and accepted for Test Level 3.

Category 3 includes devices that are expected to cause significant velocity changes or other potentially harmful reactions to impacting vehicles. These include crash cushions, truck mounted attenuators and other devices not meeting the definitions of Category 1 or 2. Category 3 devices shall be crash tested and accepted for either Test Level 3 or the test level specified.

Category 4 includes portable or trailer-mounted devices such as arrow boards, changeable message signs, temporary traffic signals and area lighting supports. Currently, there is no implementation date set for this category and it is exempt from the NCHRP 350 compliance requirement.

The Contractor shall provide a manufacturer's self-certification letter for each Category 1 device and an FHWA acceptance letter for each Category 2 and Category 3 device used on the contract. The letters shall state the device meets the NCHRP 350 requirements for its respective category and test level, and shall include a detail drawing of the device."

Delete the third, fourth and fifth paragraphs of Article 702.03(b) of the Standard Specifications.

Delete the third sentence of the first paragraph of Article 702.03(c) of the Standard Specifications.

Revise the first sentence of the first paragraph of Article 702.03(e) of the Standard Specifications to read:

"Drums shall be nonmetallic and have alternating reflectorized Type AA or Type AP fluorescent orange and reflectorized white horizontal, circumferential stripes."

Add the following to Article 702.03 of the Standard Specifications:

"(h) Vertical Barricades. Vertical barricades may be used in lieu of cones, drums or Type II barricades to channelize traffic."

Delete the fourth paragraph of Article 702.05(a) of the Standard Specifications.

Revise the sixth paragraph of Article 702.05(a) of the Standard Specifications to read:

"When the work operations exceed four days, all signs shall be post mounted unless the signs are located on the pavement or define a moving or intermittent operation. When approved by the Engineer, a temporary sign stand may be used to support a sign at 1.2 m (5 ft) minimum where posts are impractical. Longitudinal dimensions shown on the plans for the placement of signs may be increased up to 30 m (100 ft) to avoid obstacles, hazards or to improve sight distance, when approved by the Engineer. "ROAD CONSTRUCTION AHEAD" signs will also be required on side roads located within the limits of the mainline "ROAD CONSTRUCTION AHEAD" signs."


Delete all references to "Type 1A barricades" and "wing barricades" throughout Section 702 of the Standard Specifications. 80097


STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

D-97-049-04

FAI ROUTE 57

D-7 PAVT PATCHING 2005-3 JEFFERSON COUNTY C-97-089-04

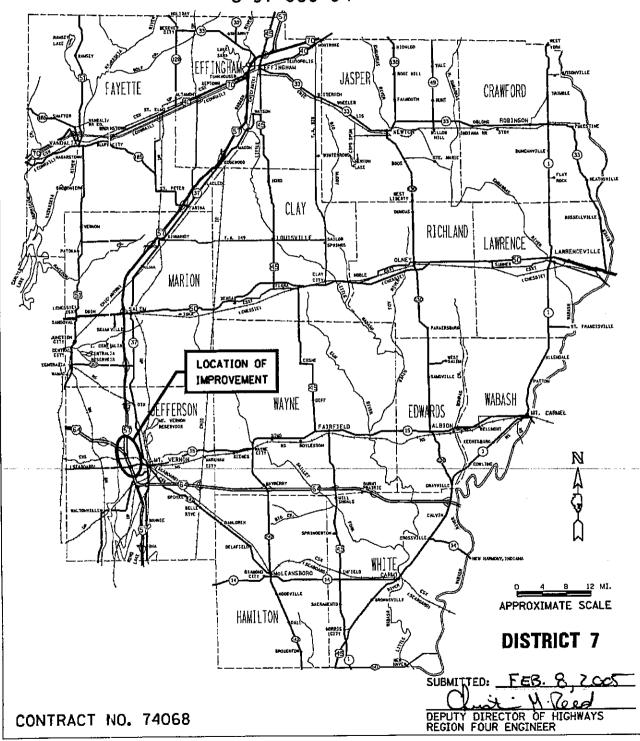

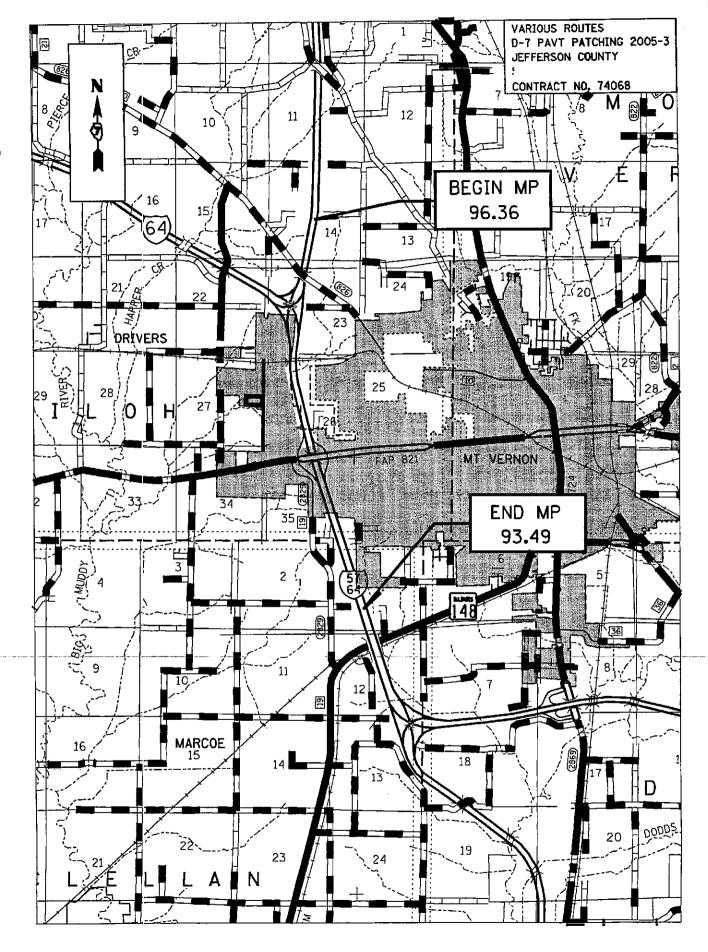

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	LOCATION MAP
3	INDEX OF SHEETS
4	GENERAL NOTES
5	SUMMARY OF QUANTITIES
6	PATCHING SCHEDULE

THE FOLLOWING STANDARDS ARE A PART OF THESE PLANS AND ARE INCLUDED AFTER THE PATCHING SCHEDULE.

000001-04 STANDARD SYMBOLS, ABBREVIATIONS, PATTERNS 001001 AREAS OF REINFORCEMENT REBARS 001006 DECIMAL OF AN INCH AND OF A FOOT 420001-05 PAVEMENT JOINTS 421001-01 BAR REINFORCEMENT FOR CRC PAVEMENT 442001-02 CLASS A PATCHES 701400-02 APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY 701411-03 LANE CLOSURE, MULTILANE AT ENTRANCE OR EXIT RAI	STD. NO.	DESCRIPTION
701411-03 LANE CLOSURE, MULTILANE AT ENTRANCE OR EXTERNA	001001 001006 420001-05 421001-01 442001-02 701400-02 701401-03	AREAS OF REINFORCEMENT REBARS DECIMAL OF AN INCH AND OF A FOOT PAVEMENT JOINTS BAR REINFORCEMENT FOR CRC PAVEMENT CLASS A PATCHES APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY LANE CLOSURE, FREEWAY/EXPRESSWAY
FOR SPEEDS > 45 MPH	701411-03	

GENERAL NOTES

THIS SECTION SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE PLANS, THE "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION", ADOPTED JANUARY 1, 2002, THE "SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS" INDICATED ON THE CHECK SHEET, AND "THE SPECIAL PROVISIONS" INCLUDED IN THE PROPOSAL.

THE WORK INCLUDED IN THE SECTION D-7 PATCHING 2005-3 CONSISTS OF CLASS A PAVEMENT PATCHING AND OTHER WORK NECESSARY TO COMPLETE THE SECTION.

THE ACTUAL LOCATIONS OF PAVEMENT PATCHING SHALL BE DETERMINED BY THE ENGINEER IN THE FIELD.

NO. 6 REINFORCEMENT BARS SHALL BE USED, LONGITUDINAL AS WELL AS TRANSVERSE, IN ALL CLASS A PATCHES.

IN ADDITION TO THE SPECIAL PROVISION "PORTLAND CEMENT CONCRETE PATCHING (BDE)", A MINIMUM CONCRETE TEMPERATURE OF 85 DEGREES SHALL BE MAINTAINED. HOT WATER MAY BE USED IF REQUIRED TO MAINTAIN THE MINIMUM TEMPARTURE. THE CONTRACTOR SHALL COVER THE PATCHES WITH A MINIMUM R12 INSULATING BLANKET REGARDLESS OF THE AIR TEMPERATURE. THE PATCHES SHALL BE CURED A MINIMUM OF 5 HOURS. CALCIUM CHLORIDE WILL BE SPECIFIED AT THE DOSAGE RATE OF 2.0-4.8 GAL/CU YD.

SUMMARY OF QUANTITIES

		DECORPTION	UNIT	100% STATE J000 URBAN
	PAY ITEM	DESCRIPTION		
•	44200561	CLASS A PATCHES, TYPE I, 11 INCH	SQ YD	4
	44200565	CLASS A PATCHES, TYPE II, 11 INCH	SQ YD	264
	44200569	CLASS A PATCHES, TYPE III, 11 INCH	SQ YD	173
	44200571	CLAS(3 A PATCHES, TYPE IV, 11 INCH	SQ YD	25
	44213000	PATCHING REINFORCEMENT	SQ YD	465
	44213200	SAW CUTS	FOOT	2573
	67100100	MOBILIZATION	L SUM	1
	70100305	TRAFFIC CONTROL AND PROTECTION, STANDARD 701400	L SUM	1
	7010420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	4
	X7010805	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401 (SPECIAL)	LSUM	1
	Z0075300	TIE BARS	EACH	9

Class A Patching

D-7 Pavt. Patching 2005-3 North and Southbound

| | | | | | | | |
 | |

 |

 |
 | _

 |

 | _
 | _ | _ | _

 | _

 | _ | $\overline{}$ | $\overline{}$ | _
 | _ | ┰ | т-
 | | ┰ | ┰╴ | Т | | ┰ | ٦. |
|-----------|---|---|--|---|--|--|--
--|--
--
--

--
--
--|--
--
--

--
--
---|--|--|---
--

--
---	--
--
--|--|---|--|---|--
--|--|---|---|-----------------|
| T Car | | ההה | 7 2 2 | 40.0 | 49.5 | 45.5 | 45.5 | 45.5
 | 49.5 | 49.5

 | 55.5

 | 73.5
 | 73.5

 | 45.5

 | 45.5
 | 45.5 | 45.5 | 45.5

 | 45.5

 | 45.5 | 45.5 | 55.5 | 65.5
 | 49.5 | 55.5 | 73.5
 | 73.5 | 2 6 | 73.5 | 7.5 | 7 7 7 | 7 7 7 | 2:22 |
| Sy | | 40.0 | 2,5 | p./ | 8.0 | 6.7 | 6.7 | 6.7
 | 8.0 | 8.0

 | 10.0

 | 16.0
 | 16.0

 | 6.7

 | 6.7
 | 6.7 | 6.7 | 6.7

 | 6.7

 | 6.7 | 87 | 10.01 | 7 7 7
 | 208 | 100 | 18.0
 | 200 | 0.0 | 75.0 | 200 | 0.7 | 3 5 | 2,2 |
| <u> </u> | | | | | | | |
 | |

 |

 |
 |

 |

 |
 | | |

 |

 | - | - |
 - | -
 | , | |

 | | | | \
\
+ |

 - | | |
| lype 4 | , | | | | | | |
 | |

 |

 |
 |

 |

 |
 | | - |

 |

 | | | | -
 | | | | | | | | |
 | | | 7.0.2
7.0.2 | | | | |
| lype 3 | | | | | | | |
 | |

 |

 | 16.0
 | 16.0

 |

 |
 | | |

 |

 | | | |
 | 1 | | 9
 | 0.01 | 16.0 | | 16.0 | | | |
| Type 2 | | | 10.0 | 6.7 | 8.0 | 6.7 | 6.7 | 6.7
 | 8.0 | 8.0

 | 10.0

 |
 |

 | 6.7

 | B O
 | 6.7 | 6.7 | . 0

 | 100

 | 700 | 0.0 | 000 | 10.0
 | 13.3 | 9.0
9.0 | 10:0
 | | | | | 6.7 | 6.7 | 10.0 |
| Type 1 | À | | | | | | |
 | |

 |

 |
 |

 |

 |
 | | |

 |

 | | | | | | | |
 | | |
 | | | | | | | |
| Thickness | | | %00.0 | 0.00% | 0.00% | 0.00% | %00 O | 0.00%
 | 0.00% | 00.0

 | 0.00%

 | 0.00%
 | 7000

 | 7000

 | 9000
 | 0.00% | 0.00% | 0.00%

 | 0.00%

 | 0.00% | 0.00% | 0.00% | 0.00%
 | 0.00% | 0.00% | 0.00%
 | 0.00% | 0.00% | 0.00% | 0.00% | %00'0 | 0.00% | 0.00% |
| Depth | | ļ | 11.0 | 11.0 | 11.0 | 11.0 | 110 | 110
 | 11.0 | 410

 | 110

 | 110
 |

 | 2 5

 | 2 3
 | 2 3 | 11.0 | 11.0

 | 11.0

 | 11.0 | 11.0 | 11.0 | 11.0
 | 11.0 | = | 11.0
 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 |
| Depth | Li . | | 11.0 | 11.0 | 110 | 110 | 7 | 2 0
 | 7 | 110

 | 110

 | 5 0
 | 2 2

 | 2 4

 | 0.11
 | 0,5 | 11.0 | 41.0

 | 11:0

 | 11.0 | 11.0 | 11.0 | 11.0
 | 11.0 | 11.0 | 11.0
 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 | 11.0 |
| Width | Щ | | 6.0 | 9 | 90 | 909 | 2 | 2 6
 | 200 | 200

 | 0.0

 | 45.0
 | 12.0

 | 12.0

 | 0.9
 | 0.0 | 6.0 | 0:9

 | 0.9

 | 6.0 | 6.0 | 6.0 | 0.9
 | 6.0 | 6.0 | 0.9
 | 12.0 | 12.0 | 15.0 | 12.0 | 6.0 | 0.9 | 6.0 |
| Length | Ħ | | 15.0 | 10.0 | 300 | 10.0 | 2 2 | 0.0
 | 10,0 | 2.5

 | 45.0

 | 12.0
 | 12.0

 | 12.0

 | 10.0
 | 10.0 | 10.0 | 10.0

 | 10.0

 | 10.0 | 10.0 | 10.0 | 15.0
 | 20.0 | 12.0 | 15.0
 | 12.0 | 12.0 | 15.0 | 12.0 | 10.0 | 10.0 | 15.0 |
| Post | | | 03.40 | 145 | 04.13 | 20.02 | 10.00 | 70.08
 | 80.08 | 90.09

 | 85.15

 | 85.13
 | 92.10

 | 95.17

 | 93.70
 | 93.74 | 94.27 | 94.33

 | 94.36

 | 94.37 | 94.38 | 94.99 | 95.05
 | 92.06 | 95.10 | 95.15
 | 95.17 | 94.15 | 94.16 | 94.24 | 94.26 | 94.49 | 94.73 |
| } | | | וטמט | 1000 | SBUL | SBOL | 2007 | SBUL
 | SBUL | Sept

 | Seul

 | SBUL
 | SBUL

 | SBDL

 | SBPL
 | SBPL | SBPL | SBPL

 | SBPL

 | THES | SBPL | SBPL | SBPL
 | SBPL | SBCL | SBPL
 | SBPL | NBDI | NBO | NBDI | NBDI | QBN | CHN |
| Number | | | ÷ | - - | 7 6 | 2 | * | c)
 | ۱۵ | ,

 | 0 (

 | ß,
 | 2

 | =

 | 12
 | 13 | 14 | 15

 | 16

 | 17 | 18 | 19 | 20
 | 21 | 22 | 23
 | 24 | 25 | 26 | 27 | 28 | 2 2 | 30 |
| | Post Length Width Depth Thickness Type 1 Type 2 1ype 3 1ype 4 115 pars Franciscon | Post Length Width Depth Thickness Type 1 Type 2 1ype 3 1ype 4 115 pars Fraviscon 8y sy sy ea sy | Post Length Width Depth Thickness Type 1 lype 2 lype 3 lype 4 lie bals Faving. | Post Length Width Depth Thickness Type 1 Type 2 1ype 3 1ype 3 1ype 3 1ype 4 1 10.0 | Post Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Type 3 Type 4 Type 3 Type 4 Type 4 Type 4 Type 4 Type 5 Type 4 Type 5 Type 5 Type 6 Type 7 Type | Post Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Type 3 Type 4 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Type 4 Type 5 Type 6 Type 6 Type 7 Type | Post Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Type 6 Type 6 Type 6 Type 7 Type | Post Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Type 3 Type 4 Type 3 Type 4 Type 4 Type 4 Type 5 Type 4 Type 5 Type 6 Type 6 Type 6 Type 7 Type | Post Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Type 3 Type 4 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Type 6 Type 6 Type 6 Type 7 Type | SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 5.7 97.0 8.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 6.7 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0 6.7 95.0 17.0</td><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 6.7 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.0 11.0 11.0 0.00% 6.7
6.7 6.7</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 10.0 6.7 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.13 12.0 6.0 11.0 11.0 0.00% 8.0</td><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 5.7 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 11.0 11.0 0.00%</td><td>SEDL 93.49 15.0 6.0 11.0 10.0% 10.0 6.7 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 190.4 190.4 190.4 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.09 12.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0</td><td>SEDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Thickness Type 3 Type 4 Thickness Thickness Type 3 Type 4 Thickness Thickness Type 3 Thickness Thickness</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 0.00% SP sy sy</td><td>SBDL 93.49 1.50 6.0 11.0 1.0 1.00 8y 1.00 1.00 SBDL 94.15 1.0 6.0 11.0 1.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.05 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0</td><td>SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0 11.0 10.0 6.0 10.0 6.0 10.0
SBDL 95.10 10.0</td><td>SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4</td></t<><td>SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0<</td><td>SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0</td><td> Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6</td><td> Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty</td><td>SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0</td><td>SBDL 93.49 1.0<</td><td> Sedical Section</td></td></th<></td></th<></td></th<></td></th<></td></th<></td></t<> | SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 6.7 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0 6.7 95.0 17.0</td><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 6.7 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 10.0 SBDL 94.15 10.0
6.0 11.0 11.0 0.00% 6.7 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.0 11.0 11.0 0.00% 6.7</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 10.0 6.7 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.13 12.0 6.0 11.0 11.0 0.00% 8.0</td><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 5.7 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 11.0 11.0 0.00%</td><td>SEDL 93.49 15.0 6.0 11.0 10.0% 10.0 6.7 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 190.4 190.4 190.4 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.09 12.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0</td><td>SEDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Thickness Type 3 Type 4 Thickness Thickness Type 3 Type 4 Thickness Thickness Type 3 Thickness Thickness</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 0.00% SP sy sy</td><td>SBDL 93.49 1.50 6.0 11.0 1.0 1.00 8y 1.00 1.00 SBDL 94.15 1.0 6.0 11.0 1.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.05 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0</td><td>SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04
 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0 11.0 10.0 6.0 10.0 6.0 10.0 SBDL 95.10 10.0</td><td>SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4</td></t<><td>SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0<</td><td>SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0</td><td> Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6</td><td> Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty</td><td>SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0</td><td>SBDL 93.49 1.0<</td><td> Sedical Section</td></td></th<></td></th<></td></th<></td></th<></td></th<> | SBDL 93.49 15.0 6.0 11.0 10.0 6.7 95.0 17.0 | SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 6.7 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.0 11.0 11.0 0.00% 6.7
 6.7 6.7</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 10.0 6.7 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.13 12.0 6.0 11.0 11.0 0.00% 8.0</td><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 5.7 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 11.0 11.0 0.00%</td><td>SEDL 93.49 15.0 6.0 11.0 10.0% 10.0 6.7 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 190.4 190.4 190.4 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.09 12.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0</td><td>SEDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Thickness Type 3 Type 4 Thickness Thickness Type 3 Type 4 Thickness Thickness Type 3 Thickness Thickness</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 0.00% SP sy sy</td><td>SBDL 93.49 1.50 6.0 11.0 1.0 1.00 8y 1.00 1.00 SBDL 94.15 1.0 6.0 11.0 1.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.05 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0</td><td>SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0
 11.0 10.0 6.0 10.0 6.0 10.0 SBDL 95.10 10.0</td><td>SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4</td></t<><td>SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0<</td><td>SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0</td><td> Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6</td><td> Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty</td><td>SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0</td><td>SBDL 93.49 1.0<</td><td> Sedical Section</td></td></th<></td></th<></td></th<></td></th<> | SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.0 11.0 11.0 0.00% 6.7</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 10.0 6.7 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.13 12.0 6.0 11.0 11.0 0.00% 8.0</td><td>SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 5.7 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 11.0 11.0 0.00%</td><td>SEDL 93.49 15.0 6.0 11.0 10.0% 10.0 6.7 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10.0
 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 190.4 190.4 190.4 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.09 12.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0</td><td>SEDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Thickness Type 3 Type 4 Thickness Thickness Type 3 Type 4 Thickness Thickness Type 3 Thickness Thickness</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 0.00% SP sy sy</td><td>SBDL 93.49 1.50 6.0 11.0 1.0 1.00 8y 1.00 1.00 SBDL 94.15 1.0 6.0 11.0 1.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.05 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0</td><td>SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0 11.0 10.0 6.0 10.0 6.0 10.0 SBDL 95.10 10.0</td><td>SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4</td></t<><td>SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0<</td><td>SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0</td><td> Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6</td><td> Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty</td><td>SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0
6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0</td><td>SBDL 93.49 1.0<</td><td> Sedical Section</td></td></th<></td></th<></td></th<> | SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 8.0 8.0 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.0 11.0 11.0 0.00% 6.7 | SBDL 93.49 1.50 6.0 11.0 11.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 10.0 6.7 10.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.13 12.0 6.0 11.0 11.0 0.00% 8.0 | SBDL 93.49 15.0 6.0 11.0 11.0 10.0% 5.7 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 11.0 11.0 0.00% | SEDL 93.49 15.0 6.0 11.0 10.0% 10.0 6.7 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 190.4 190.4 190.4 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.09 12.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0</td><td>SEDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Thickness Type 3 Type 4 Thickness Thickness Type 3 Type 4 Thickness Thickness Type 3 Thickness Thickness</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 0.00% SP sy sy</td><td>SBDL 93.49 1.50 6.0 11.0 1.0 1.00 8y 1.00 1.00 SBDL 94.15 1.0 6.0 11.0 1.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7
 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.05 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0</td><td>SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0 11.0 10.0 6.0 10.0 6.0 10.0 SBDL 95.10 10.0</td><td>SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4</td></t<><td>SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0<</td><td>SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0</td><td> Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6</td><td> Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty</td><td>SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0</td><td>SBDL 93.49 1.0<</td><td> Sedical Section</td></td></th<></td></th<> | SBDL 93.49 15.0 6.0 11.0 10.0 <th< td=""><td>SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 190.4 190.4 190.4 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL
95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.09 12.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0</td><td>SEDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Thickness Type 3 Type 4 Thickness Thickness Type 3 Type 4 Thickness Thickness Type 3 Thickness Thickness</td><td>SBDL 93.49 1.50 6.0 11.0 11.0 0.00% SP sy sy</td><td>SBDL 93.49 1.50 6.0 11.0 1.0 1.00 8y 1.00 1.00 SBDL 94.15 1.0 6.0 11.0 1.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.05 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0</td><td>SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0 11.0 10.0 6.0 10.0 6.0 10.0 SBDL 95.10 10.0</td><td>SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4</td></t<><td>SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0<</td><td>SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0</td><td> Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6</td><td> Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty</td><td>SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0</td><td>SBDL 93.49 1.0<</td><td> Sedical Section</td></td></th<> | SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 190.4 190.4 190.4 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.07 10.0 6.0 11.0 11.0 0.00% 6.7
6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.09 12.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 | SEDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 4 Thickness Type 3 Type 4 Thickness Thickness Type 3 Type 4 Thickness Thickness Type 3 Thickness Thickness | SBDL 93.49 1.50 6.0 11.0 11.0 0.00% SP sy sy | SBDL 93.49 1.50 6.0 11.0 1.0 1.00 8y 1.00 1.00 SBDL 94.15 1.0 6.0 11.0 1.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.02 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.05 12.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 <t< td=""><td>SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0</td><td>SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0 11.0 10.0 6.0 10.0 6.0 10.0 SBDL 95.10 10.0</td><td>SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4</td></t<> <td>SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0<</td> <td>SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0</td> <td> Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6</td> <td> Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty</td> <td>SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0</td> <td>SBDL 93.49 1.0<</td> <td> Sedical Section</td> | SBDL 93.49 15.0 6.0 11.0 10.0% 8y 8y 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 8.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 10.0 6.7 10.0 6.7 6.7 10.0 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 10.0 6.7 6.7 8.0 8.0 8.0 8.0 8.0 8.0 8.0
 8.0 8.0 | SBDL 93.49 150 6.0 11.0 11.0 0.00% 5.7 19.0 10.0 10.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 6.7 10.0 6.7 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 SBDL 95.16 12.0 6.0 11.0 11.0 10.0 6.0 10.0 6.0 10.0 SBDL 95.10 10.0 | SBDL 93.49 Longth Width Depth Thickness Type 1 Type 3 Type 4 Type 4 | SBDL 93.49 Length Width Depth Thickness Type 1 Type 2 Type 3 Type 3 Type 4 Ten page 1 Ten page 1 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 9.7 10.0 SBDL 94.16 10.0 6.0 11.0 11.0 10.0 6.7 8.0 8.0 SBDL 95.02 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 8.0 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.03 10.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.13 12.0 6.0 11.0 11.0 10.0% 6.7 6.7 6.7 6.7 SBDL 95.16 12.0 6.0 11.0 11.0 0.00% 8.0 8.0< | SBDL 93.49 15.0 6.0 11.0 1.0 0.00% 8.0 87 1996 3 1996 4 16.0 SBDL 93.49 15.0 6.0 11.0 11.0 0.00% 6.7 10.0 8.0 8.0 SBDL 94.15 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 6.7 6.7 6.7 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.04 10.0 6.0 11.0 11.0 0.00% 8.0 8.0 8.0 8.0 SBDL 95.15 12.0 6.0 11.0 11.0 0.00% 8.0 10.0 | Post Length Width Depth Thickness Type 2 Type 3 Type 4 Top 6 Top 6 | Post Length Width Depth Informees Type 2 Type 3 Type 4 Type 4 Type 5 Type 4 Type 5 Ty | SBDL 95.49 1.60 6.0 11.0 11.0 10.0% 10.0 8.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 10.0 6.0 8.0 | SBDL 93.49 1.0< | Sedical Section |

Class A Patching

D-7 Pavt. Patching 2005-3 North and Southbound

0	_	_	г	Т	Т	-1	1	T	Ţ	1	T	-	-	T	T	1	丁	٦	_	\neg		Γ	(<u>.</u>
4421320	Saw Cut	#	45.5	į	0.04	79.5	37.5	45.5	79.5	49.5	45.5	49.5	49.5	25.5	200	53.5	45.5	85.5	53.5	85.5			ļ	25/3.0
4213000	Pavt Rein	sy	6.7		٥,	20.0	6.0	6.7	20.0	8.0	6.7	8.0	8.0	17.0	0.	8.9	5.3	17.8	8.9	17.8			, 200	400.4
0022300	Tie Bars	69	-																				0	9.0
4200571 Z	Type 4	s		†		1														İ			-	25.01
4200569	Type 3	òs		1		20.0			20.0					,	ş: /-			17.8		17.8			1	173.4
Measured % Change 44200561 44200565 44200569 44200571 Z0075300 44213000 44213200	Type 2	. S	2.7	7	6.7			6.7		8.0	6.7	8.0	0 8	3		6,0	5.3		6.8					264.3
44200561	Type 1	ò					4.0						-											4.0
% Change	Thickness		/4000	0.00%	0.00%	0.00%	%00.0	%00.0	%00.0	%00.0	%00.0	%00.0	78000	0.00.0	0.00%	0.00%	0.00%	0.00%	%00.0	0.00%				Totals
Measured	Depth			2:-	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	C L	21	11.0	11.0	11.0	11.0	11.0	11.0				
Plan			,	U.1.1	11.0	11.0	11.0	11.0	11.0	11.0	11.0	110	,	?	11.0	11.0	11.0	11.0	11.0	11.0				- -
	Width	#		0.0	6.0	12.0	6.0	6.0	12.0	6.0	6.0	9		0.0	16.0	8.0	8.0	16.0	8.0	16.0				
	l enoth	#		10.0	10.0	15.0	6.0	10.0	15.0	12.0	10.0	12.0	2 5	12.0	10.0	10.0	6.0	10.0	10.0	10.0				
Mile	1	Í		94.96	96.25	96.28	96.36	94.15	94.16	77 76	94 79	200	20	94.94	4+65	4+90	6+50	60+0	10+00	11+20	3			
ouci	2	-		ZBD ZBD	IOBN	CEN	NBD	GRN	idan	Iden	Jan	Non L	אם ו	NBPL	SBOn	SR On	S S On	10 E		5000				
1 dyted	himbor			3	8	33	34	35	36	37	, ac	36	S	64	41	40	43	2 2	F W	2 4	2			


유

쫎

Number Ea.

SHALL BE HELD IN RESERVE SOLELY FOR THIS PURPOSE AND SHALL NOT BE USED IN ANOTHER

LANE CLOSURE.

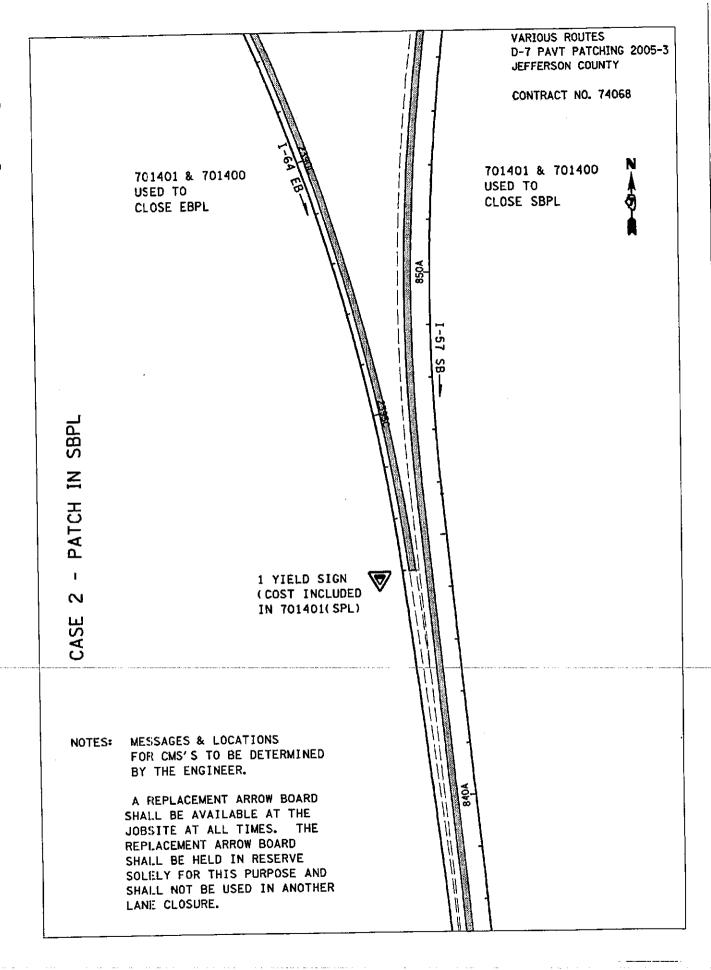

ILLINOIS DEPARTMENT OF LABOR

PREVAILING WAGES FOR JEFFERSON COUNTY EFFECTIVE APRIL 2005

The Prevailing rates of wages are included in the Contract proposals which are subject to Check Sheet #5 of the Supplemental Specifications and Recurring Special Provisions. The rates have been ascertained and certified by the Illinois Department of Labor for the locality in which the work is to be performed and for each craft or type of work or mechanic needed to execute the work of the Contract. As required by Prevailing Wage Act (820 ILCS 130/0.01, et seq.) and Check Sheet #5 of the Contract, not less than the rates of wages ascertained by the Illinois Department of Labor and as revised during the performance of a Contract shall be paid to all laborers, workers and mechanics performing work under the Contract. Post the scale of wages in a prominent and easily accessible place at the site of work.

If the Illinois Department of Labor revises the prevailing rates of wages to be paid as listed in the specification of rates, the contractor shall post the revised rates of wages and shall pay not less than the revised rates of wages. Current wage rate information shall be obtained by visiting the Illinois Department of Labor web site at http://www.state.il.us/agency/idol/ or by calling 312-793-2814. It is the responsibility of the contractor to review the rates applicable to the work of the contract at regular intervals in order to insure the timely payment of current rates. Provision of this information to the contractor by means of the Illinois Department of Labor web site satisfies the notification of revisions by the Department to the contractor pursuant to the Act, and the contractor agrees that no additional notice is required. The contractor shall notify each of its subcontractors of the revised rates of wages.

Jefferson County Prevailing Wage for April 2005

Trade Name	RG TYP			FRMAN *M-F			H/W =====	Pensn	Vac	Trng
ASBESTOS ABT-GEN	ALL		19.650	20.100 1.5			4.750	4.800	0.000	0.500
ASBESTOS ABT-MEC	BLD		24.010	25.010 1.5	1.	5 2.0	2.920		0.000	0.000
BOILERMAKER	BLD		27.000	29.500 1.5	1.	5 2.0	7.020	10.21	0.000	0.210
BRICK MASON	BLD		24.190	25.690 1.5	1.	5 2.0	5.250	4.900	0.000	0.425
CARPENTER	BLD		26.330	27.830 1.5	1.	5 2.0	4.450	3.250	0.000	0.350
CARPENTER	HWY		26.330	28.080 1.5	1.	5 2.0	4.450	3.250	0.000	0.350
CEMENT MASON	BLD		23.500	24.500 1.5	1.	5 2.0	4.200			0.100
CEMENT MASON	HWY		22.650			5 2.0		2.750		0.200
CERAMIC TILE FNSHER	BLD		24.190	0.000 1.5				4.900	0.000	0.425
ELECTRICIAN	ALL			32.230 1.5				5.400	0.000	0.450
ELECTRONIC SYS TECH	BLD			23.380 1.5			5.150		0.000	0.440
FLOOR LAYER	BLD		25.220	25.970 1.5			4.450	3.250	0.000	0.330
GLAZIER	BLD		22.050	0.000 1.5				3.600	0.000	0.200
HT/FROST INSULATOR IRON WORKER	BLD ALL		28.790 24.540	29.790 1.5 26.040 1.5			4.250 5.710	7.360	0.000	0.000
LABORER	BLD			20.100 1.5					0.000	0.500
LABORER	HWY		19.650	20.100 1.5				4.600	0.000	0.500
MACHINIST	BLD		34.540	36.290 2.0				4.100		0.000
MARBLE FINISHERS	BLD		24.190	0.000 1.5					0.000	
MARBLE MASON	BLD			25.690 1.5					0.000	0.425
MILLWRIGHT	BLD			27.830 1.5			4.450	3.250	0.000	
MILLWRIGHT	HWY		26.830	28.580 1.5	1.	5 2.0	4.450	3.250	0.000	0.350
OPERATING ENGINEER	ALL	1	24.650	25.780 1.5	1.	5 2.0	5.600	9.900	0.000	1.000
OPERATING ENGINEER	ALL	2	23.520	25.780 1.5	1.	5 2.0	5.600	9.900	0.000	1.000
OPERATING ENGINEER	ALL	3	19.040	25.780 1.5	1.	5 2.0	5.600	9.900	0.000	1.000
OPERATING ENGINEER	ALL	4	19.100	25.780 1.5	1.	5 2.0	5.600	9.900	0.000	1.000
OPERATING ENGINEER	ALL	5	18.770	25.780 1.5	1.	5 2.0	5.600	9.900	0.000	1.000
OPERATING ENGINEER	ALL	6	25.200	25.780 1.5	1.				0.000	1.000
OPERATING ENGINEER	ALL		25.500	25.780 1.5			5.600			1.000
OPERATING ENGINEER	ALL		25.780	25.780 1.5				9.900		
PAINTER	ALL		19.750					3.250		0.250
PAINTER OVER 30FT	ALL		22.850	23.350 1.5				3.250	0.000	
PAINTER PWR EQMT	ALL		22.850	23.350 1.5 27.830 1.5			3.900 4.450	3.250 3.250	0.000	0.250
PILEDRIVER PILEDRIVER	BLD HWY		26.830	28.580 1.5			4.450	3.250	0.000	0.350
PIPEFITTER	BLD			31.350 1.5					0.000	
PLASTERER	BLD			24.500 1.5			4.200			
PLUMBER	BLD			31.350 1.5			5.500			
ROOFER	BLD			19.050 1.5			4.150			
SHEETMETAL WORKER	ALL			27.720 1.5			5.750			
SPRINKLER FITTER	BLD		29.390	30.890 1.5	1.	5 2.0	6.100	4.950	0.000	0.250
STONE MASON	BLD		24.190	25.690 1.5	1.	5 2.0	5.250	4.900	0.000	0.425
TERRAZZO FINISHER	BLD		24.190	0.000 1.5	1.	5 2.0	5.250	4.900	0.000	0.425
TERRAZZO MASON	BLD		28.500	28.800 1.5		5 2.0	0.000	2.950	0.000	0.000
TRUCK DRIVER			24.385	0.000 1.5			6.500			
TRUCK DRIVER			24.785	0.000 1.5			6.500			
TRUCK DRIVER			24.985	0.000 1.5			6.500			
TRUCK DRIVER			25.235	0.000 1.5			6.500			
TRUCK DRIVER			25.985	0.000 1.5			6.500			
TRUCK DRIVER			19.508	0.000 1.5			6.500			
TRUCK DRIVER TRUCK DRIVER			19.828 19.988	0.000 1.5 0.000 1.5			6.500 6.500			
TRUCK DRIVER TRUCK DRIVER			20.188	0.000 1.5			6.500			
TRUCK DRIVER			20.188	0.000 1.5			6.500			
TUCKPOINTER	BLD			25.690 1.5			5.250			
20011101111111	טניני		_ 1.1/0			2.0	3.230	1.700	3.300	J. 12J

Legend:

M-F>8 (Overtime is required for any hour greater than 8 worked each day, Monday through Friday.

OSA (Overtime is required for every hour worked on Saturday)

OSH (Overtime is required for every hour worked on Sunday and Holidays)

H/W (Health & Welfare Insurance)

Pensn (Pension)

Vac (Vacation)

Trng (Training)

Explanations

JEFFERSON COUNTY

The following list is considered as those days for which holiday rates of wages for work performed apply: New Years Day, Memorial/Decoration Day, Fourth of July, Labor Day, Veterans Day, Thanksgiving Day, Christmas Day. Generally, any of these holidays which fall on a Sunday is celebrated on the following Monday. This then makes work performed on that Monday payable at the appropriate overtime rate for holiday pay. Common practice in a given local may alter certain days of celebration such as the day after Thanksgiving for Veterans Day. If in doubt, please check with IDOL.

Oil and chip resealing (O&C) means the application of road oils and liquid asphalt to coat an existing road surface, followed by application of aggregate chips or gravel to coated surface, and subsequent rolling of material to seal the surface.

EXPLANATION OF CLASSES

ASBESTOS - GENERAL - removal of asbestos material/mold and hazardous materials from any place in a building, including mechanical systems where those mechanical systems are to be removed. This includes the removal of asbestos materials/mold and hazardous materials from ductwork or pipes in a building when the building is to be demolished at the time or at some close future date.

ASBESTOS - MECHANICAL - removal of asbestos material from mechanical systems, such as pipes, ducts, and boilers, where the mechanical systems are to remain.

CERAMIC TILE FINISHER, MARBLE FINISHER, TERRAZZO FINISHER

Assisting, helping or supporting the tile, marble and terrazzo mechanic by performing their historic and traditional work assignments required to complete the proper installation of the work covered by said crafts. The term "Ceramic" is used for naming the classification only, and is in no a limitation of the product handled. Ceramic takes into consideration most hard tiles.

ELECTRONIC SYSTEMS TECHNICIAN

Installation, service and maintenance of low-voltage systems which

utilizes the transmission and/or transference of voice, sound, vision, or digital for commercial, education, security and entertainment purposes for the following: TV monitoring and surveillance, background/foreground music, intercom and telephone interconnect, field programming, inventory control systems, microwave transmission, multi-media, multiplex, radio page, school, intercom and sound burglar alarms and low voltage master clock systems.

Excluded from this classification are energy management systems, life safety systems, supervisory controls and data acquisition systems not intrinsic with the above listed systems, fire alarm systems, nurse call systems and raceways exceeding fifteen feet in length.

TRUCK DRIVER - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION Class 1. Drivers on 2 axle trucks hauling less than 9 ton. Air compressor and welding machines and brooms, including those pulled by separate units, truck driver helpers, warehouse employees, mechanic helpers, greasers and tiremen, pickup trucks when hauling materials, tools, or workers to and from and on-the-job site, and fork lifts up to 6,000 lb. capacity.

- Class 2. Two or three axle trucks hauling more than 9 ton but hauling less than 16 ton. A-frame winch trucks, hydrolift trucks, vactor trucks or similar equipment when used for transportation purposes. Fork lifts over 6,000 lb. capacity, winch trucks, four axle combination units, and ticket writers.
- Class 3. Two, three or four axle trucks hauling 16 ton or more. Drivers on water pulls, articulated dump trucks, mechanics and working forepersons, and dispatchers. Five axle or more combination units.
- Class 4. Low Boy and Oil Distributors.
- Class 5. Drivers who require special protective clothing while employed on hazardous waste work.

 TRUCK DRIVER OIL AND CHIP RESEALING ONLY.

This shall encompass laborers, workers and mechanics who drive contractor or subcontractor owned, leased, or hired pickup, dump, service, or oil distributor trucks. The work includes transporting materials and equipment (including but not limited to, oils, aggregate supplies, parts, machinery and tools) to or from the job site; distributing oil or liquid asphalt and aggregate; stock piling material when in connection with the actual oil and chip contract. The Truck Driver (Oil & Chip Resealing) wage classification does not include supplier delivered materials.

OPERATING ENGINEERS

GROUP I. Cranes, Dragline, Shovels, Skimmer Scoops, Clamshells or Derrick Boats, Pile Drivers, Crane-Type Backhoes, Asphalt Plant Operators, Concrete Plant Operators, Dredges, Asphalt Spreading Machines, All Locomotives, Cable Ways, or Tower Machines, Hoists, Hydraulic Backhoes, Ditching Machines or Backfiller, Cherrypickers, Overhead Cranes, Roller, Steam or Gas, Concrete Pavers, Excavators, Concrete Breakers, Concrete Pumps, Bulk Cement Plants, Cement Pumps, Derrick-Type Drills, Boat Operators, Motor Graders or Pushcats, Scoops or Tournapulls, Bulldozers, Endloaders or Fork Lifts, Power Blade or Elevating Graders, Winch Cats, Boom or Winch Trucks or Boom Tractors, Pipe Wrapping or Painting Machines, Asphalt Plant Engineer, Journeyman Lubricating Engineer, Drills (other than Derrick Type), Mud Jacks, or Well Drilling Machines, Boring Machines or Track Jacks, Mixers, Conveyors (Two), Air Compressors (Two), Water Pumps regardless of

size (Two), Welding Machines (Two), Siphons or Jets (Two), Winch Heads or Apparatuses (Two), Light Plants (Two), Waterblasters (two), All Tractors regardless of size (straight tractor only), Fireman on Stationary Boilers, Automatic Elevators, Form Grading Machines, Finishing Machines, Power Sub-Grader or Ribbon Machines, Longitudinal Floats, Distributor Operators on Trucks, Winch Heads or Apparatuses (One), Mobil Track air and heaters (two to five), Heavy Equipment Greaser, Relief Operator, Assistant Master Mechanic and Heavy Duty Mechanic, all Operators (except those listed below).

GROUP II. Assistant Operators.

GROUP III. Air Compressors (One), Water Pumps, regardless of Size (One), Waterblasters (one), Welding Machine (One), Mixers (One Bag), Conveyor (One), Siphon or Jet (One), Light Plant (One), Heater (One), Immobile Track Air (One), and Self Propelled Walk-Behind Rollers. GROUP IV. Asphalt Spreader Oilers, Fireman on Whirlies and Heavy Equipment Oilers, Truck Cranes, Dredges, Monigans, Large Cranes - (Over 65-ton rated capacity) Concrete Plant Oiler, Blacktop Plant Oiler, and Creter Crane Oiler (when required).

GROUP V. Oiler.

GROUP VI. Master Mechanics, Operators on equipment with Booms, including jibs, 100 feet and over, and less than 150 feet long.

GROUP VII. Operators on equipment with Booms, including jibs, 150 feet and over, and less than 200 feet long.

GROUP VIII. Operators on Equipment with Booms, including jibs, 200 feet and over; Tower Cranes; Whirlie Cranes; and Operator Foreman.

Other Classifications of Work:

For definitions of classifications not otherwise set out, the Department generally has on file such definitions which are available. If a task to be performed is not subject to one of the classification of pay set out, the Department will upon being contacted state which neighboring county has such a classification and provide such rate, such rate being deemed to exist by reference in this document. If no neighboring county rate applies to the task, the Department shall undertake a special determination, such special determination being then deemed to have existed under this determination. If a project requires these, or any classification not listed, please contact IDOL at 618/993-7271 for wage rates or clarifications.

LANDSCAPING

Landscaping work falls under the existing classifications for laborer, operating engineer and truck driver. The work performed by landscape plantsman and landscape laborer is covered by the existing classification of laborer. The work performed by landscape operators (regardless of equipment used or its size) is covered by the classifications of operating engineer. The work performed by landscape truck drivers (regardless of size of truck driven) is covered by the classifications of truck driver.