


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
774		EFFINGHAM	344	124A
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT				
• 107WRS-1, 107BY, 107BY-1 & 107B-2				
CONTRACT NO. 94827				

SHEET NO. 6
OF 14 SHEETS

Tier	Station	Soil Nailed Wall Work Points			Segmental Concrete Block Wall Work Points		
		Offset	Top of Wall Elevation	Bottom of Wall Elevation	Offset	Top of Wall Elevation	Bottom of Wall Elevation
7	1027+75.00	70'-3"	586.20	580.68	68'-0"	586.20	581.18
7	1028+00.00	70'-3"	587.22		68'-0"	587.22	
7	1028+25.00	70'-3"	587.22	582.74	68'-0"	587.22	583.24
6	1027+20.00	66'-3"	580.17	574.41	64'	580.17	574.90
6	1027+27.00	66'-3"	580.68		64'		
6	1027+50.00	66'-3"			64'	582.17	
6	1027+75.00	66'-3"	580.68		64'		
6	1028+25.00	66'-3"	582.74		64'	585.26	
6	1028+50.00	66'-3"			64'	585.29	
6	1029+00.00	66'-3"	586.34		64'	586.34	
6	1029+50.00	66'-3"	588.36		64'	588.36	
6	1029+60.00	66'-3"	588.36	584.23	64'	588.36	584.73
5	1026+95.00	62'-3"	573.70	569.41	60'	573.70	569.91
5	1027+00.00	62'-3"	574.41		60'		
5	1027+20.00	62'-3"	574.41		60'	576.92	
5	1029+60.00	62'-3"	584.23		60'		
5	1029+75.00	62'-3"			60'	587.35	
5	1029+93.00	62'-3"	585.55	581.58	60'	587.35	582.05
5	1032+07.00	62'-3"	594.18	588.66	60'	594.18	589.17
5	1032+50.00	62'-3"	595.24	589.73	60'	595.24	590.23
5	1032+93.00	62'-3"	596.19	590.66	60'	596.19	591.16
4	1026+81.00	58'-3"	569.41	564.86	56'	571.37	565.36
4	1026+95.00	58'-3"	569.41		56'		
4	1029+93.00	58'-3"	581.58		56'		
4	1030+00.00	58'-3"	581.83	577.83	56'	584.34	578.33
4	1030+20.00	58'-3"	582.62	578.62	56'	584.34	579.13
4	1030+90.00	58'-3"	587.64	581.09	56'	587.60	581.60
4	1031+00.00	58'-3"	587.96	581.45	56'	587.96	581.94
4	1031+20.00	58'-3"	588.62		56'	588.62	
4	1031+35.00	58'-3"	588.62		56'	588.62	583.12
4	1031+35.00	58'-3"	585.12		56'		
4	1031+50.00	58'-3"	584.57	583.05	56'		
4	1031+67.00	58'-3"	588.64		56'	590.07	584.06
4	1031+67.00	58'-3"	586.07		56'		
4	1032+00.00	58'-3"		584.50	56'	591.01	585.00
4	1032+07.00	58'-3"	588.66		56'		
4	1032+50.00	58'-3"	589.73	585.73	56'	592.24	586.23
4	1032+93.00	58'-3"	590.66		56'		
4	1033+00.00	58'-3"	590.79	586.81	56'	593.32	587.31
4	1033+27.00	58'-3"	591.30	587.28	56'	593.32	587.78
3	1026+50.00	54'-3"	564.11	559.60	52'	564.11	560.09
3	1026+57.00	54'-3"	564.86		52'		
3	1026+81.00	54'-3"	564.86		52'	567.37	
3	1030+00.00	54'-3"	577.83	573.83	52'	580.34	574.33
3	1030+20.00	54'-3"	578.62		52'	581.13	
3	1030+29.00	54'-3"	578.99		52'	581.13	575.47
3	1030+29.00	54'-3"	577.44		52'		
3	1030+50.00	54'-3"	577.21	575.68	52'		
3	1030+72.00	54'-3"	581.09		52'	583.00	577.01
3	1030+72.00	54'-3"	579.01		52'		
3	1030+90.00	54'-3"	581.09		52'		
3	1031+00.00	54'-3"	581.45	577.45	52'	583.96	577.94
3	1031+35.00	54'-3"			52'	585.12	
3	1031+50.00	54'-3"	583.05	579.06	52'	584.57	579.56
3	1031+67.00	54'-3"			52'	586.07	
3	1032+00.00	54'-3"	584.50	580.50	52'	587.01	581.01
3	1032+50.00	54'-3"	585.73	581.73	52'	588.24	582.23
3	1033+00.00	54'-3"	586.81	582.81	52'	589.32	583.31
3	1033+27.00	54'-3"	587.28		52'	589.79	
3	1033+43.00	54'-3"	587.57	583.56	52'	589.79	584.07

Tier	Station	Soil Nailed Wall Work Points			Segmental Concrete Block Wall Work Points		
		Offset	Top of Wall Elevation	Bottom of Wall Elevation	Offset	Top of Wall Elevation	Bottom of Wall Elevation
2	1026+32.00	50'-3"	559.60	554.86	48'	561.37	555.37
2	1026+50.00	50'-3"	559.60		48'		
2	1030+00.00	50'-3"	573.83	569.83	48'	576.34	570.33
2	1030+29.00	50'-3"			48'	577.45	
2	1030+50.00	50'-3"	575.68	571.70	48'	577.21	572.20
2	1030+72.00	50'-3"			48'	579.00	
2	1031+00.00	50'-3"	577.45	573.45	48'	579.96	573.95
2	1031+50.00	50'-3"	579.06	575.06	48'	581.57	575.56
2	1032+00.00	50'-3"	580.50	576.50	48'	583.01	577.00
2	1032+50.00	50'-3"	581.73	577.73	48'	584.24	578.23
2	1033+00.00	50'-3"	582.81	578.81	48'	585.32	579.31
2	1033+43.00	50'-3"	583.56		48'	586.08	
2	1033+50.00	50'-3"	583.68	579.69	48'	586.08	580.19
2	1033+68.00	50'-3"	584.00	580.13	48'	586.08	580.63
1	1026+10.00	46'-3"	554.86	549.99	44'	555.17	550.49
1	1026+32.00	46'-3"	554.86		44'	557.37	
1	1030+00.00	46'-3"	569.83	565.84	44'	572.34	566.34
1	1030+50.00	46'-3"	571.70	567.71	44'	574.21	568.21
1	1031+00.00	46'-3"	573.45	569.46	44'	575.96	569.96
1	1031+50.00	46'-3"	575.06	571.07	44'	577.57	571.57
1	1032+00.00	46'-3"	576.50	572.51	44'	579.01	573.01
1	1032+50.00	46'-3"	577.73	573.74	44'	580.24	574.24
1	1033+00.00	46'-3"	578.81	574.82	44'	581.32	575.32
1	1033+50.00	46'-3"	579.69	575.70	44'	582.20	576.20
1	1033+68.00	46'-3"			44'	582.65	
1	1033+81.00	46'-3"	580.46	576.47	44'	582.65	576.98

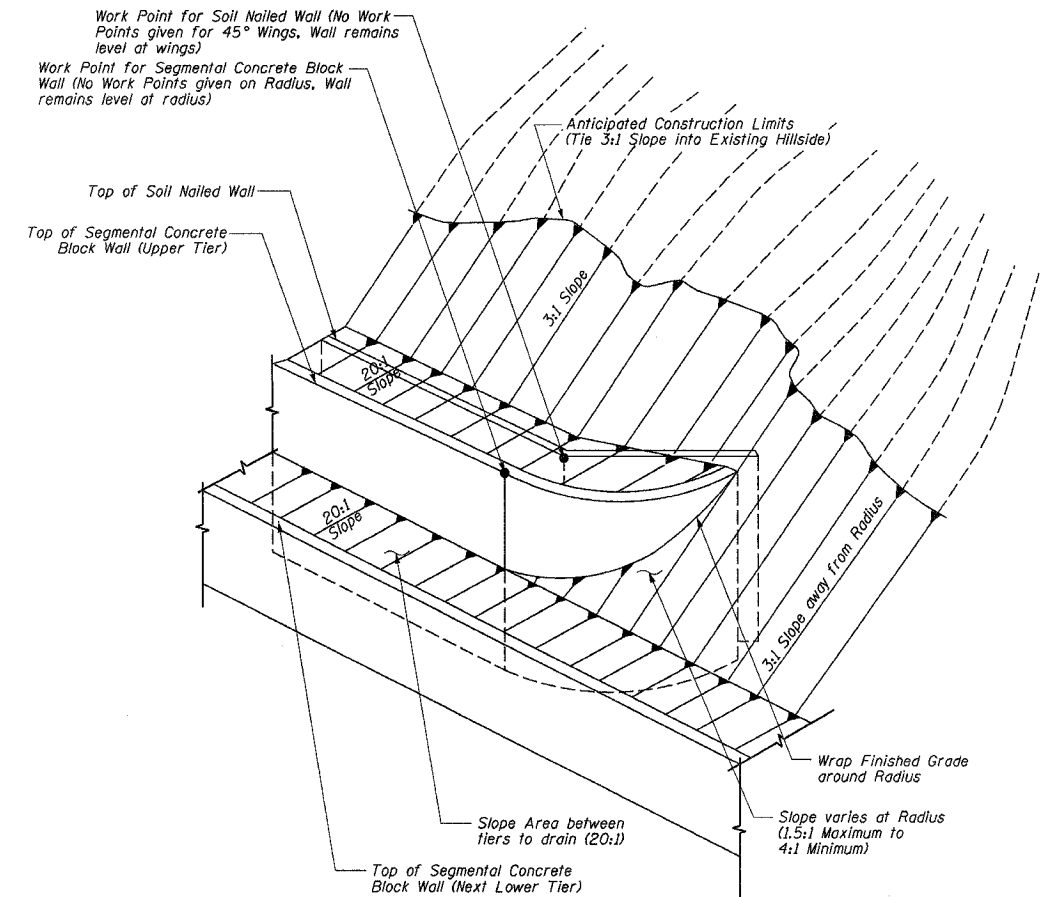

WORK POINT AND FINAL GRADING DETAIL

WALL ELEVATIONS
ILLINOIS ROUTE 32/33
F.A.P. ROUTE 774
SECTION 107 WRS-1, 107BY,
107BY-1 & 107B-2
EFFINGHAM COUNTY
RETAINING WALL
STA. 1026+03.00 LT. TO STA. 1033+86.00 LT.
STRUCTURE NUMBER 025-W008