



## TYPICAL CROSS SECTION SHOWING STEP CONSTRUCTION ON EXISTING FILL

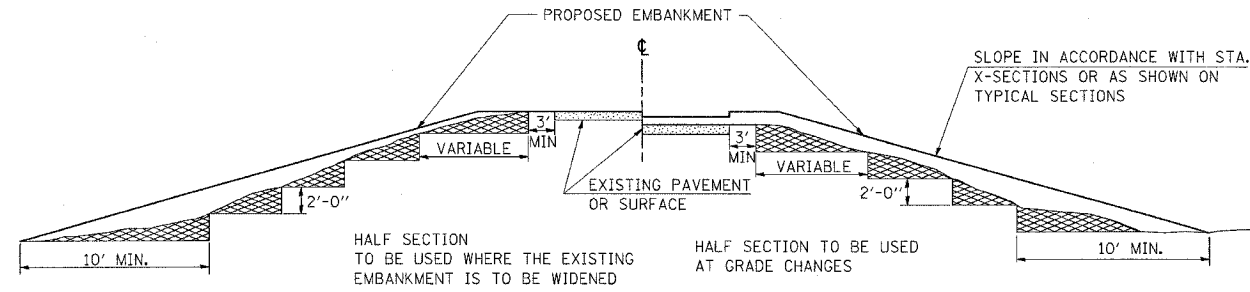

 MATERIAL TO BE REMOVED AND REPLACED IN THE EMBANKMENT IN ACCORDANCE WITH ART. 205.04 OF THE STANDARD SPECIFICATION. COST TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED BECAUSE OF THIS WORK.


REVISIONS  
 REDRAWN 2-15-89  
 REVISED 8-15-94  
 CHECKED 6-3-99  
 REVISED

STD. 9-16

## TEMPORARY DITCH CHECKS


F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1887	6B-1	WILLIAMSON	27	19
STA. 262+55		TO STA. 263+25		
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT	
CONTRACT NUMBER 98655				

### PLACEMENT OF TEMPORARY STRAW BALE DITCH CHECK IN DRAINAGEWAY



POINTS A SHOULD BE HIGHER THAN POINT B

### SPACING BETWEEN TEMPORARY DITCH CHECKS




L = THE DISTANCE SUCH THAT POINTS A AND B ARE OF EQUAL ELEVATION  
 B = THE LOW POINT IN CENTER OF CHECK

REVISIONS  
 REDRAWN 9-01-99  
 REVISED 10-03-01  
 CHECKED 6-3-99  
 REVISED

STD. 9-108

## SEEDING & MULCHING

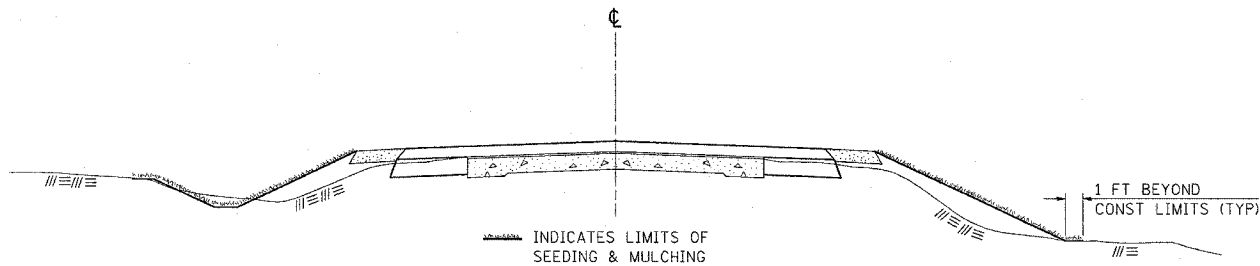

### GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CONSTRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIMESTONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

REVISIONS  
 REDRAWN 2-15-89  
 REVISED 8-15-94  
 CHECKED 6-3-99  
 REVISED

STD. 9-12