



# Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

January 7, 2011

SUBJECT: FAI Route 80  
Project ACIM-080-4 (191) 141  
Section 99-5-Y  
Will County  
Contract No. 60I47  
Item No. 105, January 21, 2011 Letting  
Addendum A

## NOTICE TO PROSPECTIVE BIDDERS:

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

1. Revised page iv of the Table of Contents to the Special Provisions.
2. Added pages 224 - 260 to the Special Provisions.
3. Revised sheets 1, 173 & 183 of the Plans.
4. Added sheets 176A & 176B to the Plans.

Prime contractors must utilize the enclosed material when preparing their bid and must include any Schedule of Prices changes in their bidding proposal.

Bidders using computer-generated bids are cautioned to reflect any and all Schedule of Prices changes, if involved, into their computer programs.

Very truly yours,

Scott E. Stitt, P.E.  
Acting Engineer of Design and Environment

A handwritten signature in black ink, appearing to read 'Ted B. Walschleger P.E.'.

By: Ted B. Walschleger, P. E.  
Engineer of Project Management

cc: Diane O'Keefe, Region 1, District 1; Mike Renner; Estimates

TBW:MS:jc

IMPACT ATTENUATORS (BDE).....	179
IMPACT ATTENUATORS, TEMPORARY (BDE).....	180
IMPROVED SUBGRADE (BDE).....	182
LIQUIDATED DAMAGES (BDE).....	184
MULCH (BDE).....	184
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM / EROSION AND SEDIMENT CONTROL DEFICIENCY DEDUCTION (BDE) .....	187
PAVEMENT MARKING REMOVAL (BDE).....	188
PAVEMENT PATCHING (BDE).....	188
PAYMENTS TO SUBCONTRACTORS (BDE) .....	188
POST MOUNTING OF SIGNS (BDE).....	189
PRECAST CONCRETE HANDLING HOLES (BDE) .....	190
RAISED REFLECTIVE PAVEMENT MARKERS (BDE).....	191
SEEDING (BDE) .....	191
SELF-CONSOLIDATING CONCRETE FOR PRECAST PRODUCTS (BDE).....	193
SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE) .....	195
TEMPORARY EROSION CONTROL (BDE) .....	195
TRAFFIC CONTROL SURVEILLANCE (BDE).....	198
BITUMINOUS MATERIALS COST ADJUSTMENTS (BDE) (RETURN FORM WITH BID).....	198
STEEL COST ADJUSTMENT (BDE) (RETURN FORM WITH BID) .....	201
STORM WATER POLLUTION PREVENTION PLAN.....	205
NOTICE OF INTENT.....	221
TRENCH AND BACKFILL FOR ELECTRICAL WORK .....	224
FIBER OPTIC INTERCONNECT CABINET .....	224
ELECTRIC SERVICE INSTALLATION – GROUND MOUNT .....	226
FIBER OPTIC CABLE, SINGLE MODE.....	228
MODIFICATION OF EXISTING CCTV DISTRIBUTION SYSTEM.....	241
CCTV EQUIPMENT .....	245

Revised 01/07/2011

## **TRENCH AND BACKFILL FOR ELECTRICAL WORK**

Effective: January 1, 2011

Revise the first sentence of Article 819.03(a) of the Standard Specifications to read:

“Trench. Trenches shall have a minimum depth of 30 in. (760 mm) or as otherwise indicated on the plans, and shall not exceed 12 in. (300 mm) in width without prior approval of the Engineer.”

Revise the second sentence of Article 819.03(b) of the Standard Specifications to read:

“The installation depth shall have a minimum depth of 30 in. (760 mm) below the finished grade or as shown on the plans.”

Revise the first sentence of Article 819.05 of the Standard Specifications to read:

“Underground cable marking tape shall have a reinforced metallic detection strip.”

Revise the second paragraph of Article 1066.05 of the Standard Specifications to read:

“The tape shall be a woven reinforced polyethylene tape with a metallic core or backing that is detectable.”

## **FIBER OPTIC INTERCONNECT CABINET**

Effective: January 1, 2011

Description. This item shall consist of furnishing and installing an outside plant fiber optic interconnect cabinet. The cabinet shall have sufficient space and mounting appurtenances to store a total of six 96-fiber cable splices, 120v power, and a shelf for the installation of media converts and Ethernet switches. The splice enclosures used for determining the size shall be full size closures, i.e., not a “mini” variant. The cabinet shall be similar to a Multilink 4 Bay OTN cabinet. The minimum dimensions of the cabinet shall be 78”W x36”D x 62”H, however the cabinet may need to be larger to accommodate the number of splice enclosures specified.

Enclosure.

Main Body: 1/8” Aluminum 5052-H32.  
Hardware: Type 304 Stainless Steel.  
Finish: Polyester Powder Coated.  
Racks: 3/16” Aluminum, E.I.A. / T.I.A. spacing (10-32 threads).  
Doors: Minimum of 4 with 3 point latches, padlock able.

Main Cabinet:

2 - 19”-23” Adjustable width racks, also adjustable front to rear position (43” tall)  
2 - 19”23” Adjustable width racks, swing out for ease of rear equipment access (40” tall)  
Minimum of 166” of total inches of rack space (95 RU)

Added 01/07/2011

The lock shall be Corbin #2 and two keys shall be supplied to the Department with each lock. The keys shall be removable in the locked position only.

A data pocket of high impact thermoplastic material shall be provided. The nominal dimensions of this pocket shall be 12 inches by 12 inches.

Collar studs shall be provided for mounting the stainless steel backboard panel.

The interconnect cabinet at the I-355 interchange shall have 120v power extended from the existing lighting controller as a part of this item. The cables, raceway, and trench and backfill shall be paid for separately. All other work to provide power to the cabinet shall be included in the cost of this item.

The contractor may provide a rack mounted DC power supply to power the media converters and Ethernet switches as long as the power supply is fully coordinated with the other equipment manufacturers. Otherwise a sufficient quantity of 120v outlets shall be provided for the individual power supplies. Outlets shall be surge protected and shall rated for the environment. Standard corded outlet strips are not acceptable.

The outlets shall be of sufficient quantity to provide outlets for all equipment required in the cabinet plus and additional spare duplex outlet. A surge suppressor shall be provided for the outlets. The outlets shall be suitable for the application and cannot be typical indoor power strips.

Installation. The cabinet shall be installed on a concrete foundation as a part of this item. The Contractor shall confirm the orientation of the cabinet, with the Engineer, prior to installing the foundation. A reinforced portland cement concrete foundation shall be constructed in accordance with the cabinet manufacturer's instructions and shall be a minimum of 36" deep. The top of the foundation shall extend a minimum of 12-inches above grade.

Two 4-inch diameter galvanized steel conduit stub out with large radius sweeps shall be provide on each side of the cabinet foundation for a total of eight.

The cabinet shall be set plumb and level on the foundation. It shall be fastened to the anchor rods with hot-dipped galvanized or stainless steel nuts and washers. Foundation mounted lighting controllers shall be caulked at the base with silicone.

All conduit entries shall be sealed with a rodent and dust/moisture barrier.

Work Pad. A poured, 5 inch thick concrete pad, extending not less than 48 in. from the foundation edge shall be provided on all four sides of the cabinet.

Method Of Measurement. Fiber optic interconnect cabinet shall be counted, each installed.

Basis Of Payment. This item shall be paid at the contract unit each for **FIBER OPTIC INTERCONNECT CABINET** as specified.

Added 01/07/2011

## **ELECTRIC SERVICE INSTALLATION – GROUND MOUNT**

Effective: January 1, 2011

Revise Section 805 of the Standard Specifications to read:

### **Description.**

This work shall consist of all materials and labor required to install, modify, or extend the electric service installation.

### **General.**

The electric service installation shall be the electric service disconnecting means and it shall be identified as suitable for use as service equipment.

The electric utility contact information is noted on the plans and represents the current information at the time of contract preparation. The Contractor must request in writing for service and/or service modification within 10 days of contract award and must follow-up with the electric utility to assure all necessary documents and payment are received by the utility. The Contractor shall forward copies of all correspondence between the contractor and utility company. The service agreement and sketch shall be submitted for signature to the Engineer.

### **Materials.**

General. The completed control panel shall be constructed in accordance with UL Std. 508A, Industrial Control Panel, and carry the UL label. Wire terminations shall be UL listed.

Enclosure. The cabinet shall be UL 50, NEMA Type 3R unfinished single door design with back panel. The cabinet shall be fabricated from Type 5052 H-32 aluminum with the frame and door 0.125-inch (3.175 mm) thick, the top 0.250-inch (6.350 mm) thick and the bottom 0.500-inch (12.70 mm) thick. Seams shall be continuous welded and ground smooth. The door and door opening shall be double flanged. The door shall be approximately 80% of the front surface, with a full length tamperproof stainless steel .075-inch (1.91 mm) thick hinge bolted to the cabinet with stainless steel carriage bolts and nylocks nuts. The locking mechanism shall be slam-latch type with a keyhole cover. The cabinet shall be sized to adequately house all required components with extra space for arrangement and termination of wiring. A minimum size of 40-inches (1000 mm) high, 16-inches (400 mm) wide and 15-inches (375 mm) in depth is required. The cabinet shall include a meter socket compatible and coordinated with the electric utility. The cabinet shall be mounted upon a square Type A concrete foundation as indicated on the plans. The foundation shall be included in the cost of this item and not paid for separately.

Surge Protector. Overvoltage protection, with LED indicator, shall be provided for the 120 volt load circuit by the means MOV and thermal fusing technology. The response time shall be <5n seconds and operate within a range of -40C to +85C. The surge protector shall be UL 1449 Listed.

Circuit Breakers. Circuit breakers shall be standard UL listed molded case, thermal-magnetic bolt-on type circuit breakers with trip free indicating handles. 120 volt circuit breakers shall have an interrupting rating of not less than 65,000 rms symmetrical amperes.

Added 01/07/2011

Unless otherwise indicated, the main disconnect circuit breaker for the traffic signal controller shall be rated 60 amperes, 120 V and the auxiliary circuit breakers shall be rated 10 amperes, 120 V.

Fuses, Fuseholders and Power Indicating Light. Fuses shall be small-dimensional cylindrical fuses of the dual element time-delay type. The fuses shall be rated for 600 V AC and shall have a UL listed interrupting rating of not less than 10,000 rms symmetrical amperes at rated voltage. The power indicating light shall be LED type with a green colored lens and shall be energized when electric utility power is present.

Ground and Neutral Bus Bars. A single copper ground and neutral bus bar, mounted on the equipment panel shall be provided. Ground and neutral conductors shall be separated on the bus bar. Compression lugs, plus 2 spare lugs, shall be sized to accommodate the cables with the heads of the connector screws painted green for ground connections and white for neutral connections.

Utility Services Connection. The Contractor shall notify the Utility Company marketing representative a minimum of 30 working days prior to the anticipated date of hook-up. This 30 day advance notification will begin only after the Utility Company marketing representative has received service charge payments from the Contractor. Prior to contacting the Utility Company marketing representative for service connection, the service installation controller cabinet and cable must be installed for inspection by the Utility Company.

Ground Rod. Ground rods shall be copper-clad steel, a minimum of 10 feet (3.0m) in length, and 3/4 inch (20mm) in diameter. Ground rod resistance measurements to ground shall be 25 ohms or less. If necessary additional rods shall be installed to meet resistance requirements at no additional cost to the contract.

Concrete Foundation. This work shall include a concrete foundation as specified and as indicated in the plans. Add the following to Article 878.03 of the Standard Specifications:

All anchor bolts shall be according to Article 1006.09, with all anchor bolts hot dipped galvanized a minimum of 12 in. (300 mm) from the threaded end. foundations shall be a minimum depth of 48 inches (1220 mm).

### **Installation.**

General. The Contractor shall confirm the orientation of the traffic service installation and its door side with the engineer, prior to installation. All conduit entrances into the service installation shall be sealed with a pliable waterproof material.

Pole Mounted. Brackets designed for pole mounting shall be used. All mounting hardware shall be stainless steel. Mounting height shall be as noted on the plans or as directed by the Engineer.

Ground Mounted. The service installation shall be mounted plumb and level on the foundation and fastened to the anchor bolts with hot-dipped galvanized or stainless steel nuts and washers. The space between the bottom of the enclosure and the top of the foundation shall be caulked at the base with silicone.

Added 01/07/2011

**Basis of Payment.**

The service installation shall be paid for at the contract unit price each for **SERVICE INSTALLATION** of the type specified which shall be payment in full for the work described herein. Utility company charges shall be paid for under the pay item Electric Utility Service Connection..

**FIBER OPTIC CABLE, SINGLE MODE**

Effective: January 1, 2011

**Description.** The Contractor shall furnish and install loose-tube, single-mode, fiber optic cable of the number of fibers specified as shown in the plans and as directed by the Engineer.

Other ancillary components, required to complete the fiber optic cable plant, including but not limited to, moisture and water sealants, cable caps, fan-out kits, etc., shall be included in the cost of fiber optic cable and will not be paid for separately.

**Materials** The single-mode, fiber optic cable shall incorporate a loose, buffer-tube design. The cable shall be an accepted product of the United States Department of Agriculture Rural Utilities Service (RUS) 7 CFR 1755.900 and meet the requirements of ANSI/ICEA Standard for Fiber Optic Outside Plant Communications Cable, ANSI/ICEA S-87-640-1999 for a single sheathed, non-armored cable, and shall be new, unused and of current design and manufacture.

**Fibers.**

The cables shall use dispersion unshifted fibers. The optical and physical characteristics of the un-cabled fibers shall include:

The single-mode fiber shall meet EIA/TIA-492CAAA, "Detail Specification for Class IVa Dispersion-Unshifted Single-Mode Optical Fibers," and ITU recommendation G.652.D, "Characteristics of a single-mode optical fiber cable."

<b>Physical Construction</b>			
<b>Requirement</b>		<b>Units</b>	<b>Value</b>
Cladding Diameter		( $\mu\text{m}$ )	125.0 $\pm$ 0.7
Core-to-Cladding Concentricity		( $\mu\text{m}$ )	$\leq$ 0.5
Cladding Non-Circularity			$\leq$ 0.7 %
Mode Field Diameter	1310 nm	( $\mu\text{m}$ )	9.2 $\pm$ 0.4
	1550 nm		10.4 $\pm$ 0.5
Coating Diameter		( $\mu\text{m}$ )	245 $\pm$ 5
Colored Fiber Nominal Diameter		( $\mu\text{m}$ )	253 - 259
Fiber Curl radius of curvature		(m)	> 4.0 m

Added 01/07/2011

<b>Optical Characteristics</b>			
<b>Requirement</b>		<b>Units</b>	<b>Value</b>
Cabled Fiber Attenuation		1310 nm	≤ 0.4
		1550 nm	≤ 0.3
Point discontinuity		1310 nm	≤ 0.1
		1550 nm	≤ 0.1
Macrobend Attenuation	Turns	Mandrel OD	
	1	32 ± 2 mm	< 0.05 at 1550 nm
	100	50 ± 2 mm	< 0.05 at 1310 nm
	100	50 ± 2 mm	< 0.10 at 1550 nm
	100	60 ± 2 mm	< 0.05 at 1550 nm
	100	60 ± 2 mm	< 0.05 at 1625 nm
Cable Cutoff Wavelength ( $\lambda_{cct}$ )		(nm)	< 1260
Zero Dispersion Wavelength ( $\lambda_0$ )		(nm)	1302 ≤ $\lambda_0$ ≤ 1322
Zero Dispersion Slope ( $S_0$ )		(ps/(nm <sup>2</sup> •km))	≤ 0.089
Total Dispersion	1550 nm	(ps/(nm•km))	≤ 3.5
	1285-1330 nm		≤ 17.5
	1625 nm		≤ 21.5
Cabled Polarization Mode Dispersion		(ps/km <sup>2</sup> )	≤ 0.2
IEEE 802.3 GbE - 1300 nm Laser Distance		(m)	up to 5000
Water Peak Attenuation: 1383 ± 3 nm		(dB/km)	≤ 0.4

### Cable Construction.

The number of fibers in each cable shall be as specified on the plans.

Optical fibers shall be placed inside a loose buffer tube. The nominal outer diameter of the buffer tube shall be 3.0 mm. Each buffer tube shall contain up to 12 fibers. The fibers shall not adhere to the inside of the buffer tube.

Each fiber shall be distinguishable by means of color coding in accordance with TIA/EIA-598-B, "Optical Fiber Cable Color Coding." The fibers shall be colored with ultraviolet (UV) curable inks.

Buffer tubes containing fibers shall be color coded with distinct and recognizable colors in accordance with TIA/EIA-598-B, "Optical Fiber Cable Color Coding." Buffer tube colored stripes shall be inlaid in the tube by means of co-extrusion when required. The nominal stripe width shall be 1 mm.

For cables containing more than 12 buffer tubes, standard colors are used for tubes 1 through 12 and stripes are used to denote tubes 13 through 24. The color sequence applies to tubes containing fibers only, and shall begin with the first tube. If fillers are required, they shall be placed in the inner layer of the cable. The tube color sequence shall start from the inside layer and progress outward.

In buffer tubes containing multiple fibers, the colors shall be stable across the specified storage and operating temperature range and shall not be subject to fading or smearing onto each other. Colors shall not cause fibers to stick together.

Added 01/07/2011



The buffer tubes shall be resistant to external forces and shall meet the buffer tube cold bend and shrinkback requirements of 7 CFR 1755.900.

Fillers may be included in the cable core to lend symmetry to the cable cross-section where needed. Fillers shall be placed so that they do not interrupt the consecutive positioning of the buffer tubes. In dual layer cables, any fillers shall be placed in the inner layer. Fillers shall be nominally 2.5 mm or 3.0 mm in outer diameter.

The central member shall consist of a dielectric, glass reinforced plastic (GRP) rod (optional steel central member). The purpose of the central member is to provide tensile strength and prevent buckling. The central member shall be overcoated with a thermoplastic when required to achieve dimensional sizing to accommodate buffer tubes/fillers.

Each buffer tube shall contain a water-swellaable yarn for water-blocking protection. The water-swellaable yarn shall be non-nutritive to fungus, electrically non-conductive, and homogeneous. It shall also be free from dirt or foreign matter. This yarn will preclude the need for other water-blocking material; the buffer-tube shall be gel-free. The optical fibers shall not require cleaning before placement into a splice tray or fan-out kit.

Buffer tubes shall be stranded around the dielectric central member using the reverse oscillation, or "S-Z", stranding process.

Water swellaable yarn(s) shall be applied longitudinally along the central member during stranding.

Two polyester yarn binders shall be applied contrahelically with sufficient tension to secure each buffer tube layer to the dielectric central member without crushing the buffer tubes. The binders shall be non-hygroscopic, non-wicking, and dielectric with low shrinkage.

For single layer cables, a water swellaable tape shall be applied longitudinally around the outside of the stranded tubes/fillers. The water swellaable tape shall be non-nutritive to fungus, electrically non-conductive, and homogenous. It shall also be free from dirt and foreign matter.

For dual layer cables, a second (outer) layer of buffer tubes shall be stranded over the original core to form a two layer core. A water swellaable tape shall be applied longitudinally over both the inner and outer layer. The water swellaable tape shall be non-nutritive to fungus, electrically non-conductive, and homogenous. It shall also be free from dirt and foreign matter.

The cables shall contain one ripcord under the sheath for easy sheath removal.

Tensile strength shall be provided by the central member, and additional dielectric yarns as required.

The dielectric yarns shall be helically stranded evenly around the cable core.

The cables shall be sheathed with medium density polyethylene (MDPE). The minimum nominal jacket thickness shall be 1.4 mm. Jacketing material shall be applied directly over the tensile strength members (as required) and water swellaable tape. The polyethylene shall contain carbon black to provide ultraviolet light protection and shall not promote the growth of fungus.

Added 01/07/2011

The MDPE jacket material shall be as defined by ASTM D1248, Type II, Class C, Category 4 and Grades J4, E7 and E8.

The jacket or sheath shall be free of holes, splits, and blisters.

The cable jacket shall contain no metal elements and shall be of a consistent thickness.

Cable jackets shall be marked with the manufacturer's name, month and year of manufacture, sequential meter or foot markings, a telecommunication handset symbol as required by Section 350G of the National Electrical Safety Code (NESEC), fiber count, and fiber type. The actual length of the cable shall be within -0/+1% of the length markings. The print color shall be white, with the exception that cable jackets containing one or more co-extruded white stripes, which shall be printed in light blue. The height of the marking shall be approximately 2.5 mm.

The maximum pulling tension shall be 2700 N (608 lbf) during installation (short term) and 890 N (200 lbf) long term installed.

The shipping, storage, and operating temperature range of the cable shall be -40°C to +70°C. The installation temperature range of the cable shall be -30°C to +70°C.

### **General Cable Performance Specifications**

The fiber optic cable manufacturer shall provide documentation and certify that the fiber optic cable complies with the following EIA-455-xxx Fiber Optic Test Procedures (FOTP):

When tested in accordance with FOTP-3, "*Procedure to Measure Temperature Cycling Effects on Optical Fibers, Optical Cable, and Other Passive Fiber Optic Components*," the change in attenuation at extreme operational temperatures (-40°C and +70°C) shall not exceed 0.15 dB/km at 1550 nm for single-mode fiber and 0.3 dB/km at 1300 nm for multimode fiber.

When tested in accordance with FOTP-82, "*Fluid Penetration Test for Fluid-Blocked Fiber Optic Cable*," a one meter length of unaged cable shall withstand a one meter static head or equivalent continuous pressure of water for one hour without leakage through the open cable end.

When tested in accordance with FOTP-81, "*Compound Flow (Drip) Test for Filled Fiber Optic Cable*," the cable shall exhibit no flow (drip or leak) of filling and/or flooding material at 70°C.

When tested in accordance with FOTP-41, "*Compressive Loading Resistance of Fiber Optic Cables*," the cable shall withstand a minimum compressive load of 220 N/cm (125 lbf/in) applied uniformly over the length of the sample. The 220 N/cm (125 lbf/in) load shall be applied at a rate of 2.5 mm (0.1 in) per minute. The load shall be maintained for a period of 1 minute. The load shall then be decreased to 110 N/cm (63 lbf/in). Alternatively, it is acceptable to remove the 220 N/cm (125 lbf/in) load entirely and apply the 110 N/cm (63 lbf/in) load within five minutes at a rate of 2.5 mm (0.1 in) per minute. The 110 N/cm (63 lbf/in) load shall be maintained for a period of 10 minutes. Attenuation measurements shall be performed before release of the 110 N/cm (63 lbf/in) load.

Added 01/07/2011

The change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fibers and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-104, "*Fiber Optic Cable Cyclic Flexing Test*," the cable shall withstand 25 mechanical flexing cycles around a sheave diameter not greater than 20 times the cable diameter. The change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fiber and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-25, "*Repeated Impact Testing of Fiber Optic Cables and Cable Assemblies*," except that the number of cycles shall be two at three locations along a one meter cable length and the impact energy shall be at least 4.4 Nm (in accordance with ICEA S-87-640)", the change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fiber and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-33, "*Fiber Optic Cable Tensile Loading and Bending Test*," using a maximum mandrel and sheave diameter of 560 mm, the cable shall withstand a rated tensile load of 2670N (601 lbf) and residual load of 30% of the rated installation load. The axial fiber strain shall be  $\leq 60\%$  of the fiber proof level after completion of 60 minute conditioning and while the cable is under the rated installation load. The axial fiber strain shall be  $\leq 20\%$  of the fiber proof level after completion of 10 minute conditioning and while the cable is under the residual load. The change in attenuation at residual load and after load removal shall not exceed 0.15 dB at 1550 nm for single mode fiber and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-85, "*Fiber Optic Cable Twist Test*," a length of cable no greater than 2 meters shall withstand 10 cycles of mechanical twisting. The change in attenuation shall not exceed 0.15 dB at 1550 nm for single-mode fiber and 0.30 dB at 1300 nm for multimode fiber.

When tested in accordance with FOTP-37, "*Low or High Temperature Bend Test for Fiber Optic Cable*," the cable shall withstand four full turns around a mandrel of  $\leq 20$  times the cable diameter after conditioning for four hours at test temperatures of  $-30^{\circ}\text{C}$  and  $+60^{\circ}\text{C}$ . Neither the inner or outer surfaces of the jacket shall exhibit visible cracks, splits, tears, or other openings. The change in attenuation shall not exceed 0.30 dB at 1550 nm for single mode fiber and 0.50 dB at 1300 nm for multimode fiber.

### **Quality Assurance Provision**

All cabled optical fibers > 1000 meters in length shall be 100% attenuation tested. The attenuation of each fiber shall be provided with each cable reel. The cable manufacturer shall be TL 9000 registered.

### **Packaging**

Top and bottom ends of the cable shall be available for testing. Both ends of the cable shall be sealed to prevent the ingress of moisture. Each reel shall have a weather resistant reel tag attached identifying the reel and cable. The reel tag shall include the following information:

Added 01/07/2011

- Cable Number
- Gross Weight
- Shipped Cable Length in Meters
- Job Order Number
- Product Number
- Customer Order Number
- Date Cable was Tested
- Manufacturer Order Number
- Cable Length Markings
  - a: Top (inside end of cable)
  - b: Bottom (outside end of cable)

The reel (one flange) marking shall include:

- Manufacturer
- Country of origin
- An arrow indicating proper direction of roll when handling
- Fork lift-handling illustration
- Handling Warnings.

Each cable shall be accompanied by a cable data sheet. The cable data sheet shall include the following information:

- Manufacturer Cable Number
- Manufacturer Product Number
- Manufacturer Factory Order Number
- Customer Name
- Customer Cable Number
- Customer Purchase Order Number
- Mark for Information
- Ordered Length
- Maximum Billable Length
- Actual Shipped Length
- Measured Attenuation of Each Fiber

The cable shall be capable of withstanding a minimum-bending radius of 20 times its outer diameter during installation and 10 times its outer diameter during operation without changing the characteristics of the optical fibers.

The cable shall meet all of specified requirements under the following conditions:

- Shipping/storage temperature: -58° F to +158° F (-50° C to +70° C)
- Installation temperature: -22° F to +158° F (-30° C to +70° C)
- Operating temperature: -40° F to +158° F (-40° C to +70° C)
- Relative humidity from 0% to 95%, non-condensing

**Optical Patch Cords and Pigtails.**

The optical patch cords and pigtails shall comply with the following:

Added 01/07/2011

- The optical patch cords shall consist of a section of single fiber, jacketed cable equipped with optical connectors at both ends.
- The factory installed connector furnished as part of the optical patch cords and pigtails shall meet or exceed the requirements for approved connectors specified herein.
- The fiber portion of each patch cord and pigtail shall be a single, jacketed fiber with optical properties identical to the optical cable furnished under this contract.
- The twelve fiber single-mode fiber optic cable shall be installed as a pigtail with factory installed ST compatible connectors.
- The patch cords shall comply with Telcordia GR-326-CORE

### **Connectors.**

The optical connectors shall comply with the following:

- All connectors shall be factory installed ST compatible connectors. Field installed connectors shall not be allowed.
- Maximum attenuation 0.4dB, typical 0.2dB.
- No more than 0.2dB increase in attenuation after 1000 insertions.
- Attenuation of all connectors will be checked and recorded at the time of installation with an insertion test minimum 5 times checked with an OTDR.
- All fibers shall be connectorized at each end.
- All fibers shall terminate at a fiber patch panel
- Unused fibers will be protected with a plastic cap to eliminate dust and moisture.
- Termination shall be facilitated by splicing factory OEM pigtails on the end of the bare fiber utilizing the fusion splicing method. Pigtails shall be one meter in length.

## **CONSTRUCTION REQUIREMENTS**

### **Experience Requirements.**

Personnel involved in the installation, splicing and testing of the fiber optic cables shall meet the following requirements:

- A minimum of three (3) years experience in the installation of fiber optic cables, including fusion splicing, terminating and testing single mode fibers.
- Install two systems where fiber optic cables are outdoors in conduit and where the systems have been in continuous satisfactory operation for at least two years. The Contractor shall submit as proof, photographs or other supporting documents, and the names, addresses and telephone numbers of the operating personnel who can be contacted regarding the installed fiber optic systems.
- One fiber optic cable system (which may be one of the two in the preceding paragraph), which the Contractor can arrange for demonstration to the Department representatives and the Engineer.

Installers shall be familiar with the cable manufacturer's recommended procedures for installing the cable.

Added 01/07/2011

This shall include knowledge of splicing procedures for the fusion splicer being used on this project and knowledge of all hardware such as breakout (furcation) kits and splice closures. The Contractor shall submit documented procedures to the Engineer for approval and to be used by Construction inspectors.

Personnel involved in testing shall have been trained by the manufacturer of the fiber optic cable test equipment to be used, in fiber optic cable testing procedures. Proof of this training shall be submitted to the Engineer for approval. In addition, the Contractor shall submit documentation of the testing procedures and a copy of the test equipment operation manual for approval by the Engineer.

### **Installation in Raceways.**

The Contractor shall provide a cable-pulling plan, identifying where the cable will enter the underground system and the direction of pull. This plan will address locations where the cable is pulled out of a handhole, coiled in a figure eight, and pulled back into the hand hole. The plan shall address the physical protection of the cable during installation and during periods of downtime. The cable-pulling plan shall be provided to the Engineer for approval a minimum of 15 working days prior to the start of installation. The Engineer's approval shall be for the operation on the freeway and does not include an endorsement of the proposed procedures. The Contractor is responsible for the technical adequacy of the proposed procedures.

During cable pulling operations, the Contractor shall ensure that the minimum bending of the cable is maintained during the unreeling and pulling operations. Entry guide chutes shall be used to guide the cable into the handhole conduit ports. Lubricating compound shall be used to minimize friction. Corner rollers (wheels), if used, shall not have radii less than the minimum installation-bending radius of the cable. A series array of smaller wheels can be used for accomplishing the bend if the cable manufacturers specifically approve the array.

The pulling tension shall be continuously measured and shall not be allowed to exceed the maximum tension specified by the manufacturer of the cable. Fuse links and breaks can be used to ensure that the cable tensile strength is not exceeded. The pulling system shall have an audible alarm that sounds whenever a pre-selected tension level is reached. Tension levels shall be recorded continuously and shall be given to the Engineer.

The cable shall be pulled into the conduit as a single component, absorbing the pulling force in all tension elements. The central strength member and Aramid yarn shall be attached directly to the pulling eye during cable pulling. "Basket grip" or "Chinese-finger type" attachments, which only attach to the cable's outer jacket, shall not be permitted. A breakaway swivel, rated at 95% of the cable manufacturer's approved maximum tensile loading, shall be used on all pulls. When simultaneously pulling fiber optic cable with other cables, separate grooved rollers shall be used for each cable.

To minimize the exposure of the backbone cable and to facilitate the longer lengths of fiber optic cable, the Contractor shall use a "blown cable" (pneumatically assisted) technique to place the fiber optic cable.

Where cable is to be pulled through existing conduit which contains existing cables, optical or other, the existing cables shall be removed and reinstalled with the fiber optic cable as indicated on the plans.

Added 01/07/2011

The removal of the cable(s) shall be paid for separately. Reinstallation of the existing cables, if indicated on the plans, along with the fiber optic cable shall be included in this item for payment.

### **Tracer Wire**

A tracer wire shall be installed with all fiber optic cable runs. One tracer wire shall be installed along with the fiber optic cable in each raceway. If a raceway has more than one fiber optic cable, only one tracer wire per raceway is required. If there are parallel raceways, a tracer wire is required in each raceway that contains a fiber optic cable. Tracer wire shall be installed in raceway segments which are metallic to provide a continuous tracer wire system.

The tracer wire shall be a direct burial rated, number 12 AWG (minimum) solid (.0808" diameter), steel core soft drawn high strength tracer wire. The wire shall have a minimum 380 pound average tensile break strength. The wire shall have a 30 mil high density yellow polyethylene (HDPE) jacket complying with ASTM-D-1248, and a 30 volt rating.

Connection devices used shall be as approved by the tracer wire manufacturer, except wire nuts of any type are not acceptable and shall not be used.

The cost of the tracer wire shall be included in the cost of the fiber optic cable and not paid for separately.

### **Construction Documentation Requirements**

#### Installation Practices for Outdoor Fiber Optic Cable Systems

The Contractor shall examine the proposed cable plant design. At least one month prior to starting installation of the fiber optic cable plant, the Contractor shall prepare and submit to the Engineer for review and approval, ten (10) copies of the Contractor's "Installation Practices for Outdoor Fiber Optic Cable Systems" manual. This manual shall address the Contractor's proposed practices covering all aspects of the fiber optic cable plant. This submittal shall include all proposed procedures, list of installation equipment, and splicing and test equipment. Test and quality control procedures shall be detailed as well as procedures for corrective action.

#### **Operation and Maintenance Documentation**

After the fiber optic cable plant has been installed, ten (10) complete sets of Operation and Maintenance Documentation shall be provided. The documentation shall, as a minimum, include the following:

- Complete and accurate as-built diagrams showing the entire fiber optic cable plant including locations of all splices.
- Final copies of all approved test procedures
- Complete performance data of the cable plant showing the losses at each splice location and each terminal connector.
- Complete parts list including names of vendors.

Added 01/07/2011

## **Testing Requirements**

The Contractor shall submit detailed test procedures for approval by the Engineer. All fibers (terminated and unterminated) shall be tested bi-directionally at both 1310 nm and 1550 nm with both an Optical Time Domain Reflectometer (OTDR) and a power meter with an optical source. For testing, intermediate breakout fibers may be concatenated and tested end-to-end. Any discrepancies between the measured results and these specifications will be resolved to the satisfaction of the Engineer. Unterminated (non-connectorized) fibers shall be tested with an approved bare fiber adapter.

The Contractor shall provide the date, time and location of any tests required by this specification to the Engineer at least 5 days before performing the test. Upon completion of the cable installation, splicing, and termination, the Contractor shall test all fibers for continuity, events above 0.1 dB, and total attenuation of the cable. The test procedure shall be as follows:

A Certified Technician utilizing an Optical Time Domain Reflectometer (OTDR) and Optical Source/Power Meter shall conduct the installation test. The Technician is directed to conduct the test using the standard operating procedures defined by the manufacturer of the test equipment. All fibers installed shall be tested in both directions.

A fiber ring or fiber box shall be used to connect the OTDR to the fiber optic cable under test at both the launch and receive ends. The tests shall be conducted at 1310 and 1550 nm for all fibers.

At the completion of the test, the Contractor shall provide two copies of documentation of the test results to the Project Engineer. The test documentation shall be submitted as both a bound copy and a CDROM and shall include the following:

### **Cable & Fiber Identification:**

- Cable ID
- Cable Location - beginning and end point
- Fiber ID, including tube and fiber color
- Wavelength
- Pulse width (OTDR)
- Refractory index (OTDR)
- Operator Name
- Date & Time
- Setup Parameters
- Range (OTDR)
- Scale (OTDR)
- Setup Option chosen to pass OTDR "dead zone"

### **Test Results shall include:**

- OTDR Test results
- Total Fiber Trace
- Splice Loss/Gain
- Events > 0.10 dB
- Measured Length (Cable Marking)
- Total Length (OTDR)
- Optical Source/Power Meter Total Attenuation (dB/km)

Added 01/07/2011



Sample Power Meter Tabulation:

Power Meter Measurements (dB)									
Location		Fiber No.	Cable Length (km)	A to B		B to A		Bidirectional Average	
A	B			1310 nm	1550 nm	1310 nm	1550 nm	1310 nm	1550 nm
		1							
		2							
Maximum Loss									
Minimum Loss									

The OTDR test results file format must be Bellcore/Telcordia compliant according to GR-196-CORE Issue 2, OTDR Data Standard, GR 196, Revision 1.0, GR 196, Revision 1.1, GR 196, Revision 2.0 (SR-4731) in a ".SOR" file format. These results shall also be provided in tabular form, see sample below:

Sample OTDR Summary					
Cable Designation:	<i>TCF-1K-03</i>	OTDR Location:	<i>Pump Sta. 67</i>	Date:	<i>1/1/00</i>
Fiber Number	Event Type	Event Location	Event Loss (dB)		
			1310 nm	1550 nm	
<i>1</i>	<i>Splice</i>	<i>23500 Ft.</i>	<i>.082</i>	<i>.078</i>	
<i>1</i>	<i>Splice</i>	<i>29000 Ft.</i>	<i>.075</i>	<i>.063</i>	
<i>2</i>	<i>Splice</i>	<i>29000 Ft.</i>	<i>.091</i>	<i>.082</i>	
<i>3</i>	<i>Splice</i>	<i>26000 Ft.</i>	<i>.072</i>	<i>.061</i>	
<i>3</i>	<i>Bend</i>	<i>27000 Ft.</i>	<i>.010</i>	<i>.009</i>	

The following shall be the criteria for the acceptance of the cable:

The test results shall show that the dB/km loss does not exceed +3% of the factory test or 1% of the cable's published production loss. However, no event shall exceed 0.10 dB. If any event is detected above 0.10 dB, the Contractor shall replace or repair the fiber including that event point.

The total loss of the cable (dB), less events, shall not exceed the manufacturer's production specifications as follows: 0.5 dB/km at both 1310 and 1550 nm.

If the total loss exceeds these specifications, the Contractor shall replace or repair that cable run at the no additional cost to the state, both labor and materials. Elevated attenuation due to exceeding the pulling tension during installation shall require the replacement of the cable run at no additional cost to the State, including labor and materials.

**Splicing Requirements**

Splices shall be made at locations shown on the Plans. Any other splices shall be permitted only with the approval of the Engineer. Splices will be paid for separately.


Added 01/07/2011

**Slack Storage of Fiber Optic Cables.**

Included as a part of this item, slack fiber shall be supplied as necessary to allow splicing the fiber optic cables in a controlled environment, such as a splicing van or tent. After splicing has been completed, the slack fiber shall be stored underground in handholes or in the raised base adapters of ground mounted cabinets in accordance with the fiber optic cable manufacturer's guidelines. Fiber optic cable slack shall be 100 feet for each cable at each splice location, above or below ground. Fiber optic cable slack shall be 50 feet for each cable at access points, above or below ground, where splicing is not involved. This slack shall be measured for payment.

Fiber optic cable shall be tagged inside handholes with yellow tape containing the text: "CAUTION - FIBER OPTIC CABLE." In addition, permanent tags, as approved by the engineer, shall be attached to all cable in a hand hole or other break-out environment. These tags shall be stainless steel, nominally 0.75" by 1.72", and permanently embossed. These tags shall be attached with stainless steel straps, and shall identify the cable number, the number of fibers, and the specific fiber count. Tags and straps shall be Panduit or approved equal. See figure below:

Added 01/07/2011

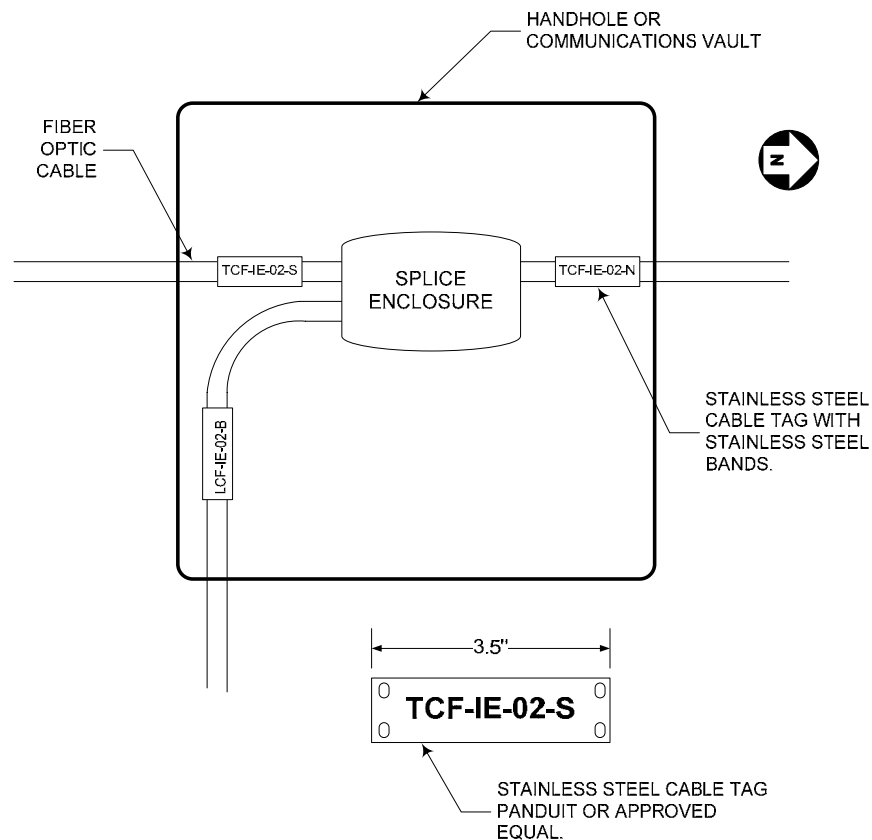

**NOTES:**

1. INNER DUCT NOT SHOWN FOR CLARITY.
2. CABLE SLACK NOT SHOWN FOR CLARITY.
3. CONFIRM CABLE DESIGNATIONS WITH ENGINEER DURING SHOP DRAWING SUBMITTAL.

Label the destination of each trunk cable onto the cable in each handhole, vault or cable termination panel.

**Method of Measurement** Fiber optic cable will be measured for payment in feet in place installed and tested. Fiber optic cable will be measured horizontally and vertically between the changes in direction, including slack cable. The entire lengths of cables installed in buildings will be measured for payment

**Basis of Payment** This work will be paid for at the contract unit price per foot for **FIBER OPTIC CABLE** of the type, size, and number of fibers specified. Payment shall not be made until the cable is installed, spliced and tested in compliance with these special provisions.

Added 01/07/2011

## **MODIFICATION OF EXISTING CCTV DISTRIBUTION SYSTEM**

January 1, 2011

General. The CCTV (Closed Circuit Television) Distribution System is a fully integrated IP multicast system, comprised primarily of Cisco network hardware and software, providing multi-point internet protocol based video images and control over Ethernet to multiple monitoring center locations while minimizing bandwidth demand upon the system.

The system shall be generally configured to collect video images and connect control from field mounted cameras at distribution node locations and to produce video images and controls at designated distribution nodes and at three monitoring locations under this contract work.

The three monitoring locations to be addressed by this contract under this item are:

- | The ComCenter at the District 1 Headquarters in Schaumburg
- | The ITS Office in Schaumburg
- | The Traffic Systems Center in Oak Park

The system shall utilize existing CCTV elements, and shall include all materials and equipment necessary to integrate the new cameras into the existing system. The work under this Special Provision includes the coordination with camera equipment provided under this contract, adjacent contract(s), and coordination with existing CCTV equipment as indicated, including adjustments of or supplements to the equipment as may be required

Video Control software. The existing control software is ICX's 360 Cameleon Enterprise camera control. Included in this item, the Contactor shall provide 20 (twenty) Enterprise software license units. The contractor shall also provision all cameras for both I-80 contracts, 60M59 and 60I47, for the ICX 360 Cameleon system. This shall include, but not limited to, the GUI, encoders, decoders, cameras etc. to enable the proposed cameras operational throughout the video distribution system.

Ten video decoders, codecs, shall be included in this item which shall be fully coordinated with the CCTV Equipment item which is described elsewhere herein.

The decoders shall be dedicated hardware devices. The codec shall be a single video channel type to transfer "full motion" 30 frame-per-second high quality D1 color video at up to 20 Megabits per second. The units shall operate to produce a robust data communications stream that shall allow for both video and audio transmission and shall be immune to timing disruptions in the existing IP multi-cast system.

The units shall be rack-mountable, or single unit chassis for single unit installation complete with power supplies as required, operating from a 120-volt single phase AC power input. Units mounted in VCPs or other control building shall be rack mountable and include standard 19" racks with dual redundant power supplies.

Decoders shall have multi-stream format detection, and decode H.264, MPEG-4 and MJPEG streams.

Added 01/07/2011

Approvable codecs shall be compatible with and demonstrably interoperable with the standard codec product of at least one other vendor. Final approval of codec equipment shall be dependent upon a demonstration test of multi-vendor interoperability. Initial submittal information shall include documentation of this interoperability and a demonstration testing plan for approval by the Engineer.

The CODEC decoders shall be Optelecom-NKF series S-60 D-MC, or approved equal by the Engineer. The Approved equal shall be 100% interchangeable with the specified unit with respect to functionality and performance.

Materials shall be supplied to satisfy the following:

<b>Video</b>	<b>Requirements</b>
Video channels	1x PAL/NTSC (Auto/PAL/NTSC)
Output level	1 Vpp ( $\pm 3$ dB)
Compression algorithms	H.264 BP (ISO/IEC 14496-10), MJPEG, MPEG-4 (ISO/IEC 14496-2, ISMA comp.)
Type of streaming	UDP/IP (multi- and/or unicast)
Decoding latency	TBD
Resolution	D1, ½D1, 2CIF, CIF, QCIF, VGA
GOP structure	I, IP
Frame rate	1 to 30 fps
On Screen Display (OSD)	3x Text lines (configurable: position, color, border/outline color, font size), 1x image in BMP, GIF, or JPEG format configurable: position, scaling)
Live View encoder (MJPEG)	HTTP, FTP pull
Connector type	BNC 75Ω (gold plated center pin)

<b>Transmission interface</b>	<b>Requirements</b>
Number of interfaces	1
Interface 10/100Base-TX	Fast Ethernet Auto Negotiation, half-duplex/full-duplex, 10/100 Mb
SFP option	Empty SFP slot for 100 Mbps SFP device
Protocols	H.264 BP, MPEG-4 ES, (M)JPEG, RTP, RTCP, RTSP, TCP, UDP, IP, DHCP, IGMPv2,(S)NTP, MX/IP, HTTP, SNMP v2, FTP, TelNet, SAP, UPnP
Connector type	RJ45

<b>Power</b>	<b>Requirements</b>
Power consumption	<5W
Rack-mount units	MC 10 and MC11 power supply cabinets
Stand-alone units (/SA)	11 to 19 VDC (PSA-12 DC/25 or PSR-12 DC)

Added 01/07/2011

Management	Requirements
LED status indicators	
DC	Power-on indicator (green)
SYNC	All links are operational (green); failure in RX stream(s) (yellow); failure in TX stream(s) (red)
Ethernet port	Green LED: on=100 Mb, off=10 Mb; Amber LED: on=link okay, flashes with activity
Network Management & Control	SNMP v2, MX™, HTTP API, HTML (password protected)

Environmental	Requirements
Operating temperature	+14° F to +140° F (-10 °C to +60 °C)
Relative humidity	<95% as long as there is no condensation.
MTBF	TBD
Safety & EMC	TBD

Contact Closures	Requirements
Number of channels	2x in, 2x out
Number of streams	2x 3 (multi- and/or unicast)
Output	Fail-safe, potential-free
Connector type	RJ45

Data	Requirements
Number of channels	2 (full-duplex)
Number of streams	2x 3 (multi- and/or unicast)
Interfaces	1x RS232 1x RS422/485 (2- or 4-wire)
Stream	TCP/UDP/MX configurable
Data rate	300 b/s to 230.4 kb/s
Connector type	RJ45

Audio	Requirement
Number of channels	2 (stereo, full-duplex)
Number of streams	3 (multi- and/or unicast)
Maximum bandwidth	20 Hz to 20 kHz
Sampling resolution	8/16-bits linear PCM or G.711
Input level	Adjustable, mic or line
Output level	Adjustable, 3 Vrms max.
Input impedance	>20 kΩ or 600Ω bal.
Output impedance	<100Ω bal.
Connector type	RJ45

The decoders shall be UL listed and be type-accepted to 47 CFR (FCC), Part 15, Type A.

The Codecs shall be the standard product of an established North American manufacturer. The manufacturer shall have been in business for a minimum of 7 years. The manufacturer shall provide a minimum of a twelve (12) month warranty from the date of installation. The manufacturer shall provide technical support via email, fax and telephone. The above forms of support shall be provided Monday through Friday, 8:00am to 5:00pm EST.

Added 01/07/2011

The Manufacturer shall also have a repair facility within North America.

The units shall be 19-inch rack-mountable, complete with power supplies as required for the rack configurations indicated on the plans, operating from a 120-volt single phase AC power input

The codecs shall be fully capable of transmitting the PTZ commands of the CCTV camera manufacturer being furnished under this contract as well as existing Philips/Bosch, Pelco, Vicon and Cohu camera commands. Serial data will be transmitted over TCP-IP. Each serial port must support IP addressing with the ability to select the appropriate IP socket number. The codecs must provide the ability to establish an IP connection directly from a workstation to any encoder IP address and socket number to pass serial data. Transmission of serial data must be independent of the video stream. Any serial data conversion required by the codec to communicate to the camera shall be included in this pay item and shall not be paid for separately.

The Encoder/Decoder serial data port must support Multicast data to broadcast a single serial data input to multiple remote encoder serial data port recipient. Bi-directional data must be supported on the codecs.

A demonstration of this low speed serial data transfer shall be required before material submittal approval is given. See submittal requirements in this Special Provision.

Codec operation and management. Each unit must support a local console accessible using one of the serial interfaces to provide access to all configuration menus of the product including the initial IP address configuration as well as for troubleshooting purposes. The interface must be menu driven for novice users.

All units (encoders and decoders) must support SNMPv2 management protocol to provide the ability to control and monitor all configuration parameters and diagnostics from any 3rd party SNMP management application.

The Encoders/Decoders must support firmware updates from a central site. Updates must be downloadable to a single unit or by bulk via a single command from a firmware utility application via the Ethernet network. The firmware utility application must provide confirmation of the successful and unsuccessful updates. Upon completing of the update, the units must resume to original configuration without the need to reload the unit configuration.

Ethernet Switches. An Industrial hardened 19-port Gigabit Ethernet switch shall be provided and provisioned at the fiber optic interconnect cabinet to connect the I-80 cameras. The switch shall have Gigabit single mode fiber optic ports with a minimum range of 70km to establish a connection with the equipment specified herein at the D1 Headquarters. Connectors shall be of the ST Type. The switch shall have redundant power supplies an operating temperature range of -40°C to +85°C without the use of fans. All printed circuit boards shall receive a factory applied conformal coating. The switch shall be a Ruggedcom RSG2100 or approved equal.

A 9-port industrial hardened Gigabit Ethernet switch with power supply shall be installed at the D1 Headquarters and shall be provisioned to connect to the existing Video Distribution System.

Added 01/07/2011

The switch shall have Gigabit single mode fiber optic ports with a minimum range of 70km to establish a connection with the equipment specified herein at the I-80/I-355 Interchange. Connectors shall be of the ST Type. The switch shall be a Ruggedcom RS900G or approved equal.

Both switches shall be fully coordinated with each other as well the existing Video Distribution System equipment and fully compliant with multicast standards as well as QoS.

Provisioning of IP routing and switching equipment. The Contractor shall fully integrate all the equipment to be installed with the existing video distribution system as a part of this item and this coordination will require technical services of the existing system integrator, AT&T, a Cisco Systems Integrator (Contact: Jim Patterson, AT&T, 217.801.2329) and coordination with the State Electrical Maintenance Contractor. This work shall be included in the item and will not be paid for separately.

Method of Measurement. The modification of existing video distribution system shall be measured for payment as lump sum when furnished, installed, configured, warranted, made fully operational, and tested as detailed herein.

Basis Of Payment. This work will be paid for at the contract lump sum price for **MODIFICATION OF EXISTING VIDEO DISTRIBUTION SYSTEM** which shall be for the work as specified herein.

## **CCTV EQUIPMENT**

Effective: January 1, 2011

### **Description.**

This item shall consist of furnishing and installing equipment for the control and distribution of CCTV video from the CCTV camera to the Fiber Optic Interconnect Cabinet. Transmission for the video and control signal shall be by fiber optic cable as specified elsewhere herein and as indicated in the plans. Distribution from the Fiber Optic Interconnect Cabinet shall be as specified for the item Modification of Existing Video Distribution System.

The transmission of the video over fiber shall include fiber transceivers at the camera location and the VCP. The video CODEC encoder specified herein shall be co-located in the CCTV equipment cabinet.

The CODEC encoders are specified and included as a part of this item and shall be fully coordinated with the decoders.

The CODEC decoders are specified and paid for as a part of the Modification of Existing Video Distribution System pay item and shall be fully coordinated and of the same manufacturer as the video CODEC encoders specified herein.

Added 01/07/2011



**CODEC Quantity Tabulation**

CODEC Type	Location							
	At Camera		D1 H.Q.		ITS Office		TSC	
<b>Contract</b>	60147	60M59	60147	60M59	60147	60M59	60147	60M59
<b>Encoder</b>	4	5	0	0	0	0	0	0
<b>Decoder</b>	0	0	2	2	1	1	2	2

**Construction Requirements**

General. The Contractor shall prepare and submit a shop drawing detailing the complete closed-circuit television cabinet equipment installation. The shop drawings shall identify the installation and specifications of all components to be supplied, for approval of the Engineer. Particular emphasis shall be given to the cabling and the interconnection of all of the components.

The Contractor shall demonstrate a prototype assembly using the proposed components. This demonstration shall take place at a Contractor selected and Engineer approved location. These conformance tests shall be completed prior to the delivery of any completed assemblies to the project site. Any deviations from these specifications that are identified during this testing shall be corrected prior to shipment of the assembly to the project site.

Appropriate connectors shall be furnished and installed to interface the in-cabinet components to the integrated dome camera assembly. The Contractor shall mount the in-cabinet components in the equipment cabinet and connect them to AC power, communications, and video feeds.

Testing. The Contractor shall test each installed CCTV Cabinet Equipment. The test shall be conducted from the field cabinet using the standard communication protocol and a laptop computer. The Contractor shall verify that the camera can be fully exercised and moved through the entire limits of Pan, Tilt, Zoom, Focus and Iris adjustments, using both the manual control and presets. In addition, a video monitor and an oscilloscope shall verify that the video signal meets or exceeds the specified requirements.

The Contractor shall repeat the test at the Fiber Optic Interconnect Cabinet.

The Contractor shall maintain a log of all testing and the corresponding results. A representative of the Contractor and a representative of the Engineer shall sign the log as witnessing the results. Records of all tests shall be submitted to the Engineer prior to accepting the installation.

Documentation. One copy of all operations and maintenance manuals for each CCTV component shall be delivered for each assembly installed. In addition, full documentation for all software and associated protocols shall be supplied to the Department on a CD-ROM. The Department reserves the right to provide this documentation to other parties who may be contracted with in order to provide overall integration or maintenance of this item.

Warranty. The Contractor shall warranty all materials and workmanship including labor for a period of two years after the completion and acceptance of the installation, unless other warranty requirements prevail.

Added 01/07/2011

The warranty period shall begin when the Contractor completes all construction obligations related to this item and when the components for this item have been accepted, which shall be documented as the final completion date in the construction status report. This warranty shall include repair and/or replacement of all failed components via a factory authorized depot repair service. All items sent to the depot for repair shall be returned within two weeks of the date of receipt at the facility. The depot location shall be in the United States. Repairs shall not require more than two weeks from date of receipt and the provider of the warranty shall be responsible for all return shipping costs.

The depot maintainer designated for each component shall be authorized by the original manufacturer to supply this service. A warranty certificate shall be supplied for each component from the designated depot repair site indicating the start and end dates of the warranty. The certificate shall be supplied at the conclusion of the system acceptance test and shall be for a minimum of two years after that point. The certificate shall name the Department as the recipient of the service. The Department shall have the right to transfer this service to other private parties who may be contracted to perform overall maintenance of the facility.

### **Materials.**

#### **Enclosure.**

CCTV Cabinet. The CCTV Cabinet, as a minimum, shall be a Hoffman Enclosures Model A30H2410SS6LP, Electromate Enclosures Model E-30H2410SSLP, or approved equal. The cabinet shall be NEMA 4X compliant. The nominal dimensions of the cabinet shall be 30 inches high by 24 inches wide by 10 inches deep. These manufacturers and model numbers are included as a guide to indicate the type of cabinet to be provided and may not be the exact manufacturer and part numbers. Due to contractor selection of equipment to be utilized, the cabinet may need to be larger. The contractor shall be responsible for providing an adequately sized cabinet and shall be included in the bid unit price for this item.

The cabinet shall be fabricated of 14 gauge Type 304 or Type 316L stainless steel. All seams shall be continuously welded and ground smooth with no holes or knockouts. The cabinet shall be fabricated with a rolled lip around three sides of the door and on all sides of the enclosure openings to exclude liquids and contaminants. A stainless steel door clamp assembly shall assure a watertight seal. A seamless gasket shall be included to assure a watertight and dust-tight seal.

The cabinet shall have provisions for padlocking in the closed position. The lock shall be Corbin #2 and two keys shall be supplied to the Department with each lock. The keys shall be removable in the locked position only.

A data pocket of high impact thermoplastic material shall be provided. The nominal dimensions of this pocket shall be 12 inches by 12 inches.

Collar studs shall be provided for mounting the stainless steel backboard panel.

The cabinet shall be unpainted. Cover, sides, top, and bottom shall have a smooth brushed finish.

Stainless Steel Panel. The cabinet shall be furnished with a stainless steel panel. It shall mount on the collar studs fabricated with the CCTV cabinet.

Added 01/07/2011

Installation. The cabinet shall be installed as indicated on the detail drawings by means compatible with the type of CCTV camera structure selected by the Contractor.

**Closed Circuit Television Camera Power Supply.**

The Closed Circuit Television Camera Power Supply shall supply power to the camera dome assembly. The power supply shall be a Treehaven Technologies RVSFB120XLB or approved equal. The requirements include:

Input voltage	120 VAC $\pm$ 10%
Output voltage	24 VAC $\pm$ 10%
Operating Temperature Range:	-40°C to +70°C (minimum)
Storage Temperature Range:	-40°C to +75°C (minimum)

The power supply shall include an AC power indicator with power on/off switch. All outputs shall be fused. The power supply shall be sized for the dome units being supplied, considering pan/tilt, heating, and blower requirements, and shall not be less than 100 VA.

Over-voltage Protection. Over-voltage protection shall be provided on the power conductors, camera control conductors, and the video cables. The specific protection is based on the elements being protected.

Incoming Power Protection. The incoming power shall be protected with a filtering surge protector that absorbs power line noise and switching transients. The specified performance shall be as follows:

Peak current	20 kA (8x20 $\mu$ s waveshape)
Life Test	5% change
Clamp voltage	280 V typical @ 20 kA
Response time	$\leq$ 5 ns
Continuous service current	10 amps max. 120 VAC/60 Hz
Operating Temperature	-40°C to +75°C (minimum)
Nominal dimensions	7.15 inches by 3.13 inches by 2.3 inches

Video Cable Protection. The coaxial cable from the camera shall be protected with gas tubes and silicon avalanche devices. The units shall include re-settable fuses to protect against sneak currents. Specific requirements include:

Frequency	0 to 20 MHz
Peak surge current	20 kA (8x20 $\mu$ s waveshape)
Technology	Hybrid, solid-state
Attenuation	0.1 dB at 10 MHz
Response time	$\leq$ 1 ns
Protection	Line-to-shield
Input/output connectors	BNC
Impedance	75 ohms
Temperature range	-40°C to +75°C (minimum)
Humidity	0% to 95% (non-condensing)
Clamping voltage	6 V
Nominal dimensions	4.5 inches by 1.5 inches by 1.25 inches

Added 01/07/2011

The video cable protector shall be UL listed.

Camera Control Cable Protection. The camera control cable protector shall protect the RS-422/RS-485 signal and bi-phase signal leads going to the camera dome assembly. Specific requirements include:

Technology	Hybrid, solid-state
Response time	≤5 ns
Protection	Line-to-ground
Input/output connectors	terminal block
Temperature range	-40°C to +75°C (minimum)
Humidity	0% to 95% (non-condensing)
Clamping voltage	7.25 V (maximum); ≤7.0 V (typical)
Nominal dimensions	4.5 inches by 3.3 inches by 1.8 inches

The protector shall protect a minimum of four conductors. [Transmit Data (2 wires) and Receiver Data (2 wires)]

### **Fiber Optic Cable Termination**

The Contractor shall include all necessary wires and cables necessary to interconnect the components of the CCTV cabinet. The Contractor shall provide a factory terminated patch block with a 12 fiber pigtail of sufficient length to connect to the lateral splice handhole without the use of any intermediate splices. The patch block shall be a Fiber Connections, Gator Patch II or approved equal..

### **Fiber Optic Distribution**

Fiber Optic Media Converter Pair. The CCTV Cabinet Equipment shall include a matched pair fiber optic media converter pair as described herein. The media converter pair shall be industrially hardened and have an operating temperature range of -40°C to +85°C without the use of fans. The media converter pair shall be single mode, ST type connector, Ruggedcom RMC or approved equal with a minimum range of 15km. The far end of the media converters shall be installed in the fiber optic interconnect cabinet and the installation shall be fully coordinated with any adjacent contractors. All connections/cables to the media converters shall be included in this item.

### **Video CODEC**

Video Encoders and Decoders. Video encoders and decoders (codecs) shall be dedicated hardware devices, and except for differences between encoders and decoders they shall all of the same type from the same common manufacturer. The codec shall be a single video channel type to transfer "full motion" 30 frame-per-second high quality D1 color video via H.264, MPEG-4, and MPEG-2 video compression at up to 20 Megabits per second. The units shall operate to produce a robust data communications stream that shall allow for both video and audio transmission and shall be immune to timing disruptions in the existing IP multi-cast system.

The units shall be rack-mountable, or single unit chassis for single unit installation complete with power supplies as required, operating from a 120-volt single phase AC power input. Unit mounted in VCPs or other control building shall include a standard 19" rack with dual redundant power supplies.

Added 01/07/2011

Encoder units shall accept NTSC video BNC input, Ethernet RJ-45 communications, and RJ45 serial data input connections.

Approvable codecs shall be compatible with and demonstrably interoperable with the standard codec product of at least one other vendor. Final approval of codec equipment shall be dependent upon a demonstration test of multi-vendor interoperability. Initial submittal information shall include documentation of this interoperability and a demonstration testing plan for approval by the Engineer.

The CODEC encoders shall be Optelecom-NKF series C-60 E-MC, or approved equal by the Engineer. The Approved equal shall be 100% interchangeable with the specified unit with respect to functionality and performance.

The encoders shall interface the serial communications port of the CCTV camera assembly through the fiber optic video link where indicated. Using the Ethernet port on the encoder and its IP address, commands shall be exchanged between the camera control computer at the Communications Center and the serial port of the CCTV camera.

Materials shall be supplied to satisfy the following:

<b>VIDEO</b>	<b>Requirements</b>
Video channels	1x PAL/NTSC (Auto/PAL/NTSC)
Input level	1 V <sub>pp</sub> (±3 dB)
Compression algorithm	H.264 BP (ISO/IEC 14496-10) MPEG-2 (ISO/IEC 13818-2), MJPEG, MPEG-4 (ISO/IEC 14496-2, ISMA comp.)
Type of streaming	UDP/IP (multi- and/or unicast)
Number of output streams	Up to 20
Input impedance	75Ω/Hi-Z selectable
Video Motion Detection	Yes (user-defined masking)
Encoding latency	<130 ms typ.
Resolution	D1, ½D1, 2CIF, CIF, QCIF, VGA
GOP structure	I, IP (selectable/user profiles)
Frame rate	1 to 30 fps
Quad streaming	1 D1@30fps H264 + D1@30fps MPEG-2+ D1@30fps MPEG-4 + CIF@1fps MJPEG
Output data rate	up to 20 Mb/s (CBR or VBR selectable/user profiles)
Video settings	User profiles, contrast, brightness, color saturation, hue, sharpness
On Screen Display (OSD)	3x Text lines (configurable: position, color, border/outline color, font size), 1x image in BMP, GIF, or JPEG format (configurable: position, scaling)
Live View Encoder (MJPEG)	HTTP, FTP pull
Connector type	BNC 75Ω (gold plated center pin)

Added 01/07/2011

<b>DATA</b>	<b>Requirements</b>
Number of channels	2 (full-duplex)
Number of streams	2x 3 (multi- and/or unicast)
Interfaces	1x RS232
	1x RS422/485 (2- or 4-wire)
Stream	TCP/UDP/MX configurable
Data rate	300 b/s to 230.4 kb/s
Connector type	RJ45

<b>TRANSMISSION</b>	<b>Requirements</b>
Number of interfaces	1
Interface 10/100Base-TX	Fast Ethernet
	Auto Negotiation, half-duplex/full-duplex, 10/100 Mb/SFP option
	Empty SFP slot for 100 Mbps SFP device
Protocols	H. 264 BP, MPEG-4 ES, MPEG-2 TS, MPEG-2 ES, (M)JPEG, RTP, RTCP, RTSP, TCP, UDP, IP, DHCP, IGMPv2,
	(S)NTP, MX/IP, HTTP, SNMP v2, FTP, TelNet, DiffServ, SAP, UPnP
Connector type	RJ45

<b>Management</b>	
LED status indicators	
DC	Power-on indicator (green)
NV	No video on input (red)
SYNC	All links are operational (green); failure in RX stream(s) (yellow); failure in TX stream(s) (red)
Ethernet port	Green LED: on=100 Mb, off=10 Mb; Amber LED: on=link okay, flashes with activity
Network Management & Control	SNMP v2, MX™, HTTP API, HTML (password protected)

<b>Power</b>	
Power consumption	<5W
Rack-mount units	MC 10 and MC11 power supply cabinets
Stand-alone units (/SA)	11 to 19 VDC (PSA-12 DC/25 or PSR-12 DC)

<b>ENVIRONMENTAL</b>	<b>Requirements</b>
Operating temperature	-40° F to +165° F (-40 °C to +74 °C)
Relative humidity	<95%,no condensation.

The encoders and decoders shall be UL listed and be type-accepted to 47 CFR (FCC), Part 15, Type A.

The Codecs shall be the standard product of an established North American manufacturer. The manufacturer shall have been in business for a minimum of 7 years. The manufacturer shall provide a minimum of a twelve (12) month warranty from the date of installation. The manufacturer shall provide technical support via email, fax and telephone. The above forms of support shall be provided Monday through Friday, 8:00am to 5:00pm EST.

Added 01/07/2011

The Manufacturer shall also have a repair facility within North America.

The units shall be 19-inch rack-mountable, complete with power supplies as required for the rack configurations indicated on the plans, operating from a 120-volt single phase AC power input

The codecs shall be fully capable of transmitting the PTZ commands of the CCTV camera manufacturer being furnished under this contract as well as existing Philips/Bosch, Pelco, Vicon and Cohu camera commands. Serial data will be transmitted over TCP-IP. Each serial port must support IP addressing with the ability to select the appropriate IP socket number. The codecs must provide the ability to establish an IP connection directly from a workstation to any encoder IP address and socket number to pass serial data. Transmission of serial data must be independent of the video stream. Any serial data conversion required by the codec to communicate to the camera shall be included in this pay item and shall not be paid for separately.

The Encoder/Decoder serial data port must support Multicast data to broadcast a single serial data input to multiple remote encoder serial data port recipient. Bi-directional data must be supported on the codecs.

A demonstration of this low speed serial data transfer shall be required before material submittal approval is given. See submittal requirements in this Special Provision.

#### Codec operation and management.

Each unit must support a local console accessible using one of the serial interfaces to provide access to all configuration menus of the product including the initial IP address configuration as well as for troubleshooting purposes. The interface must be menu driven for novice users.

All units (encoders and decoders) must support SNMPv2 management protocol to provide the ability to control and monitor all configuration parameters and diagnostics from any 3rd party SNMP management application.

The Encoders/Decoders must support firmware updates from a central site. Updates must be downloadable to a single unit or by bulk via a single command from a firmware utility application via the Ethernet network. The firmware utility application must provide confirmation of the successful and unsuccessful updates. Upon completing of the update, the units must resume to original configuration without the need to reload the unit configuration.

#### Still Picture Capture

The codec shall be capable of capturing a still image in JPEG format and automatically transferring this image to an FTP site. The resolution of the image shall be user selectable with a default size of 704x480 pixels. The frequency of captures shall be user settable and shall as a minimum range from 1 picture every 30 seconds to 1 picture every five minutes..

Still picture logo placement capability. As a part of the still image capture, a graphic overlay image shall be added to the captured image. The graphic image shall be user selectable, in JPEG, BMP or GIF formats. The overlay shall also be user positional.

Added 01/07/2011

### Special Submittal Requirements and Operational Demonstration

As a part of the product catalog cut submittal, the Contractor shall provide a demonstration of the codecs at the time of the initial product submittal. The manufacturer shall demonstrate the following interoperability with at least one other codec manufacturer. Compatibility shall also include successful transmission of PTZ commands. The demonstration shall be comprised of the following parts:

- **Codec CCTV camera PTZ compatibility.** The demonstration shall include a pair of the proposed codecs, a proposed CCTV camera, and a CCTV camera of another manufacturer other than the proposed CCTV which is of a manufacturer already installed in the State system.
- **Video interoperability.** The demonstration shall demonstrate the following interoperability: The proposed encoder shall be capable of encoding a video stream that is decodable by at least one other Manufacturer compiling with this specification, or of a manufacturer which equipment is presently in use by IDOT District 1 at the time of bidding. The interoperability demonstration shall be conducted in multicast mode.
- **Software video decoding.** A software based video decoder with PTZ control shall be provided for viewing and controlling a video stream remotely over the IP network.
- **Video snapshot capability.** A fully functional copy of the proposed video snapshot program shall be provided for the demonstration and throughout the 10 day period described herein.

After a successful demonstration of the above requirements, the codec pair shall remain with the Department for 10 working days for further observation. After 10 working days, the Contractor may pick up the codec pair. All costs for this demonstration shall be included in the cost of this pay item. It is the Contractor's responsibility to provide all hardware (including dome CCTV cameras and Ethernet switches) and software to perform the demonstrations as specified.

**Method Of Measurement.** CCTV equipment shall be counted, each installed.

**Basis Of Payment.** This item shall be paid at the contract unit each for **CCTV EQUIPMENT** of the distribution method specified.

Added 01/07/2011