


ELEVATION

* Align end shoe with holes in Steel Railing on bridge

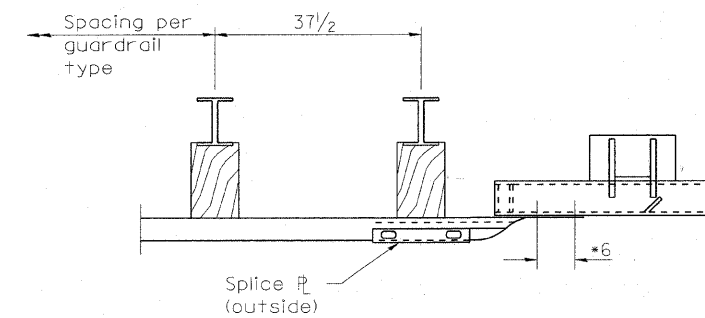

PLAN

GENERAL NOTES

- This detail for use at departure ends only.
- See standard 630001 for details of guardrail not shown.
- After tightening, cut the bolts flush with nuts, and damage the bolt head to prevent it from loosening.
- See Special Provision for additional requirements.
- See Bridge Plans for details of Steel Railing, Special.

COPYRIGHT © 2010 BY BAXTER & WOODMAN, INC. ...
 LICENSE NO. 184-00121 - EXPIRES 4/30/2011
 2/7/2011 5:05:52 PM

| | | | | | | | | | | |
|--------------|-------------|----------------|------------------------------|---|--|-------------------------|----------------|---|-------|---------------|
| FILE NAME = | USER NAME = | DESIGNED - BLB | REVISED - PER MCDOT 12/31/10 | MCHENRY COUNTY DIVISION OF TRANSPORTATION GRAF ROAD BRIDGE OVER LAWRENCE CREEK | TRAFFIC BARRIER TERMINAL (SPECIAL) STRUCTURE NO. 056-3182 | TR | SECTION | COUNTY | TOTAL | SHEET |
| | | CHECKED - BAB | REVISED - | | | 0037 | 06-00322-00-BR | MCHENRY | 54 | 43 |
| PLOT SCALE = | | DRAWN - BCD | REVISED - | | | C-91-358-06 | | CONTRACT NO. 63569 | | |
| PLOT DATE = | | CHECKED - BLB | REVISED - | | | SHEET NO. 1 OF 1 SHEETS | | FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT | | BROS-00016831 |