


**I-57 OVERLAY TYPICAL SECTION**

STA 271+94.00 TO STA 273+53.33 (WITHOUT BARRIER WALL)  
 STA 273+53.33 TO STA 276+69.00 (WITH BARRIER WALL)

ADDITIONAL CONCRETE SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE COST OF THE PCC BASE COURSE, 10".

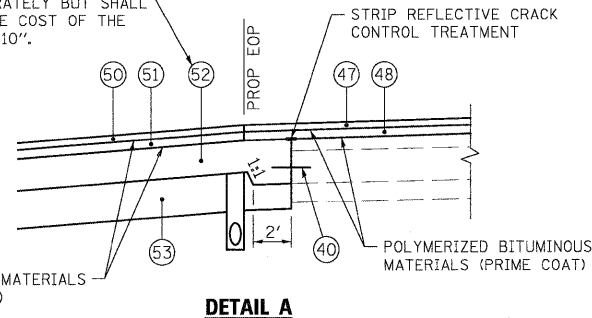

**I-57**


STRUCTURAL DESIGN TRAFFIC: YEAR 2025  
 PV = 79.8% SU = 3.0% MU = 17.8%  
 ROAD/STREET CLASSIFICATION: URBAN-INTERSTATE  
 PERCENT OF STRUCTURAL DESIGN TRAFFIC IN DESIGN LANE:  
 P = 32 S = 45 M = 45  
 TRAFFIC FACTOR: ACTUAL TF = 71.4 AC TYPE = AC-20  
 MINIMUM TF = 10.0  
 PG GRADE: BINDER = SBS PG70-22 SURFACE = SBS PG70-22  
 SUBGRADE SUPPORT RATING: POOR

**LEGEND - EXISTING**

- ① BITUMINOUS OVERLAY, (VARIES) 7" TO 7 1/4"
- ② BITUMINOUS OVERLAY, (VARIES) 3" TO 3 5/8"
- ③ P.C.C. PAVEMENT, 10"
- ④ SUB-BASE GRANULAR MATERIAL, 6"
- ⑤ SUB-BASE GRANULAR MATERIAL, 4"
- ⑥ BITUMINOUS SHOULDER, (VARIES) 10" TO 11 1/4"
- ⑦ BITUMINOUS SHOULDER, 8 3/4"
- ⑧ BITUMINOUS SHOULDER, 7"
- ⑨ CAM SHOULDER, 10"
- ⑩ CAM SHOULDER, 6"
- ⑪ AGGREGATE SHOULDER
- ⑫ TYPE B-6.12 CURB & GUTTER
- ⑬ BITUMINOUS CONCRETE SURFACE COURSE, 1 1/2"
- ⑭ EXISTING GROUND
- ⑮ BRIDGE PIER
- ⑯ CONCRETE DITCH
- ⑰ SUBSURFACE DRAINAGE SYSTEM
- ⑱ DRAINAGE DITCH
- ⑲ CONCRETE SLOPE WALL

**LEGEND - PROPOSED**

- ⑳ CONTINUOUSLY REINFORCED CONCRETE PAVEMENT, 12 1/4"
- ㉑ PORTLAND CEMENT CONCRETE SHOULDERS, 12 1/4"
- ㉒ PORTLAND CEMENT CONCRETE PAVEMENT (JOINTED), 10"
- ㉓ PORTLAND CEMENT CONCRETE SHOULDERS, 10"
- ㉔ PAVEMENT REINFORCEMENT
- ㉕ STABILIZED SUBBASE - HMA, 4"
- ㉖ SUBBASE GRANULAR MATERIAL, TYPE A, 12"
- ㉗ SUBBASE GRANULAR MATERIAL, TYPE A, 6"
- ㉘ SUBBASE GRANULAR MATERIAL, TYPE C
- ㉙ AGGREGATE SHOULDER, TYPE B, 12"
- ㉚ AGGREGATE SHOULDER, TYPE B, 4"
- ㉛ AGGREGATE SHOULDER, TYPE B, 10"
- ㉜ CONCRETE BARRIER, DOUBLE FACE, 42" HEIGHT, AND BASE
- ㉝ COMBINATION CONCRETE CURB & GUTTER, TYPE B6.24
- ㉞ CONCRETE MEDIAN SURFACE, 4 INCH
- ㉟ PAVEMENT FABRIC
- ㊱ INCIDENTAL HOT-MIX ASPHALT SURFACING, 2"
- ㊲ HOT-MIX ASPHALT PAVEMENT (FULL-DEPTH) 8"  
 HMA SURFACE COURSE, MIX "C", N50, 2"  
 HMA BINDER, IL-19.0 N50, 6"
- ㊳ PAVEMENT TO PAVEMENT (LONGITUDINAL SAWED JOINT)  
 #6 TIE BAR (EPOXY COATED) 30" LONG @ 30" C-C
- ㊴ PAVEMENT TO PAVEMENT (LONGITUDINAL CONSTRUCTION JOINT)  
 #6 TIE BAR (EPOXY COATED) 30" LONG @ 24" C-C (FORM IN PLACE) OR  
 #6 TIE BAR (EPOXY COATED) 24" LONG @ 24" C-C (GROUT IN PLACE)
- ㊵ PAVEMENT TO SHOULDER (LONGITUDINAL CONSTRUCTION JOINT)  
 #6 TIE BAR (EPOXY COATED) 30" LONG @ 24" C-C
- ㊶ #6 TIE BAR (EPOXY COATED) 12" LONG @ 30" C-C
- ㊷ #6 TIE BAR (EPOXY COATED) 30" LONG @ 24" C-C
- ㊸ PIPE UNDERDRAIN, 4" (MODIFIED) - 36" NOMINAL DEPTH BELOW BOTTOM OF CONCRETE PAVEMENT OR BASE COURSE
- ㊹ TOPSOIL EXCAVATION AND PLACEMENT (4") WITH SEEDING, TY VARIES
- ㊺ BRIDGE PIER: SEE STRUCTURAL DRAWINGS FOR DETAILS
- ㊻ POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "E", N90, 1 3/4"
- ㊼ POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N90, 2 1/4"
- ㊽ VARIABLE DEPTH BINDER PAID FOR AS HMA BINDER COURSE, IL-19.0, N90
- ㊾ HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N90, 1 1/2"
- ㊿ HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N90, 2 1/4"
- ① PORTLAND CEMENT CONCRETE BASE COURSE, 10"
- ② AGGREGATE SUBGRADE 12"

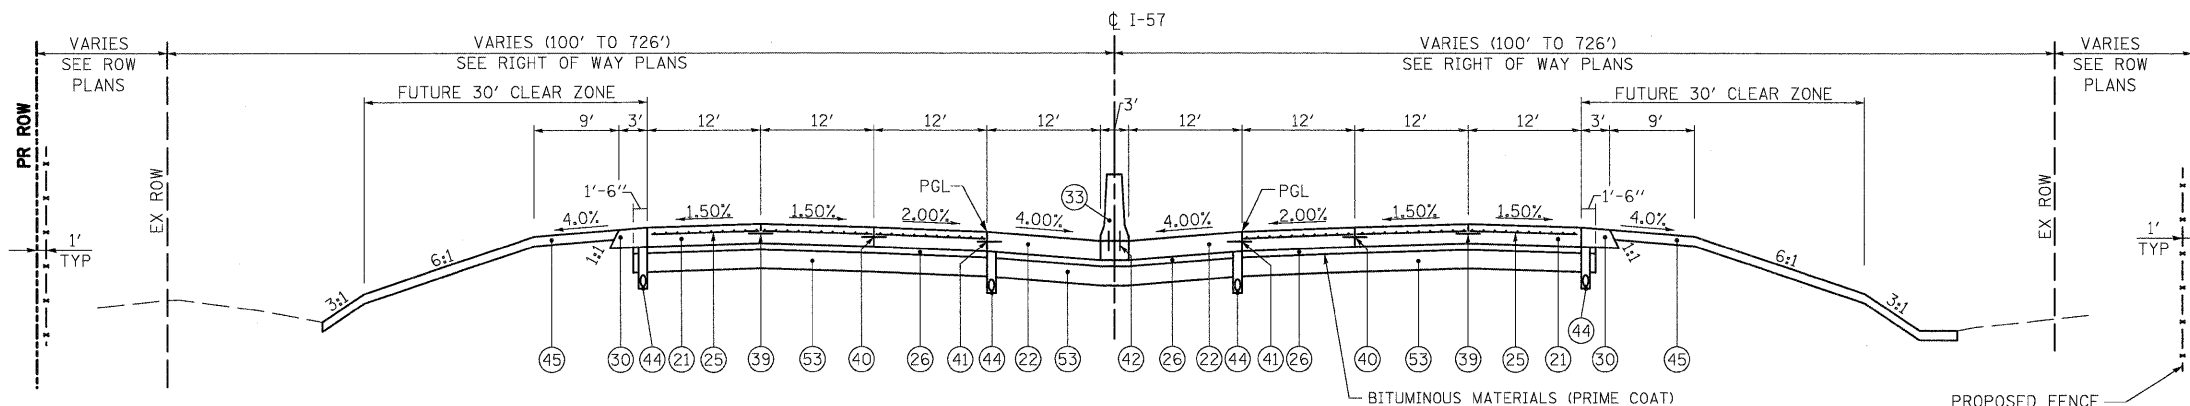

**I-57 PROPOSED TYPICAL SECTION**

STA 276+69.00 TO STA 281+93.96  
 STA 316+24.54 TO STA 328+30.50

FILE NAME = I:\Dgn\shheeta\ts003.dgn

USER NAME = EricG	DESIGNED - JTF	REVISED -
PLOT SCALE = 1:10	DRAWN - JTF	REVISED -
PLOT DATE = 12/22/2010	CHECKED - EJG	REVISED -
	DATE - 12/17/10	REVISED -

STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION

**PROPOSED TYPICAL SECTIONS**

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	(46-2) I, HBR, VBR	KANKAKEE	558	17
CONTRACT NO. 66409				
FED. ROAD DIST. NO. 3 ILLINOIS FED. AID PROJECT				