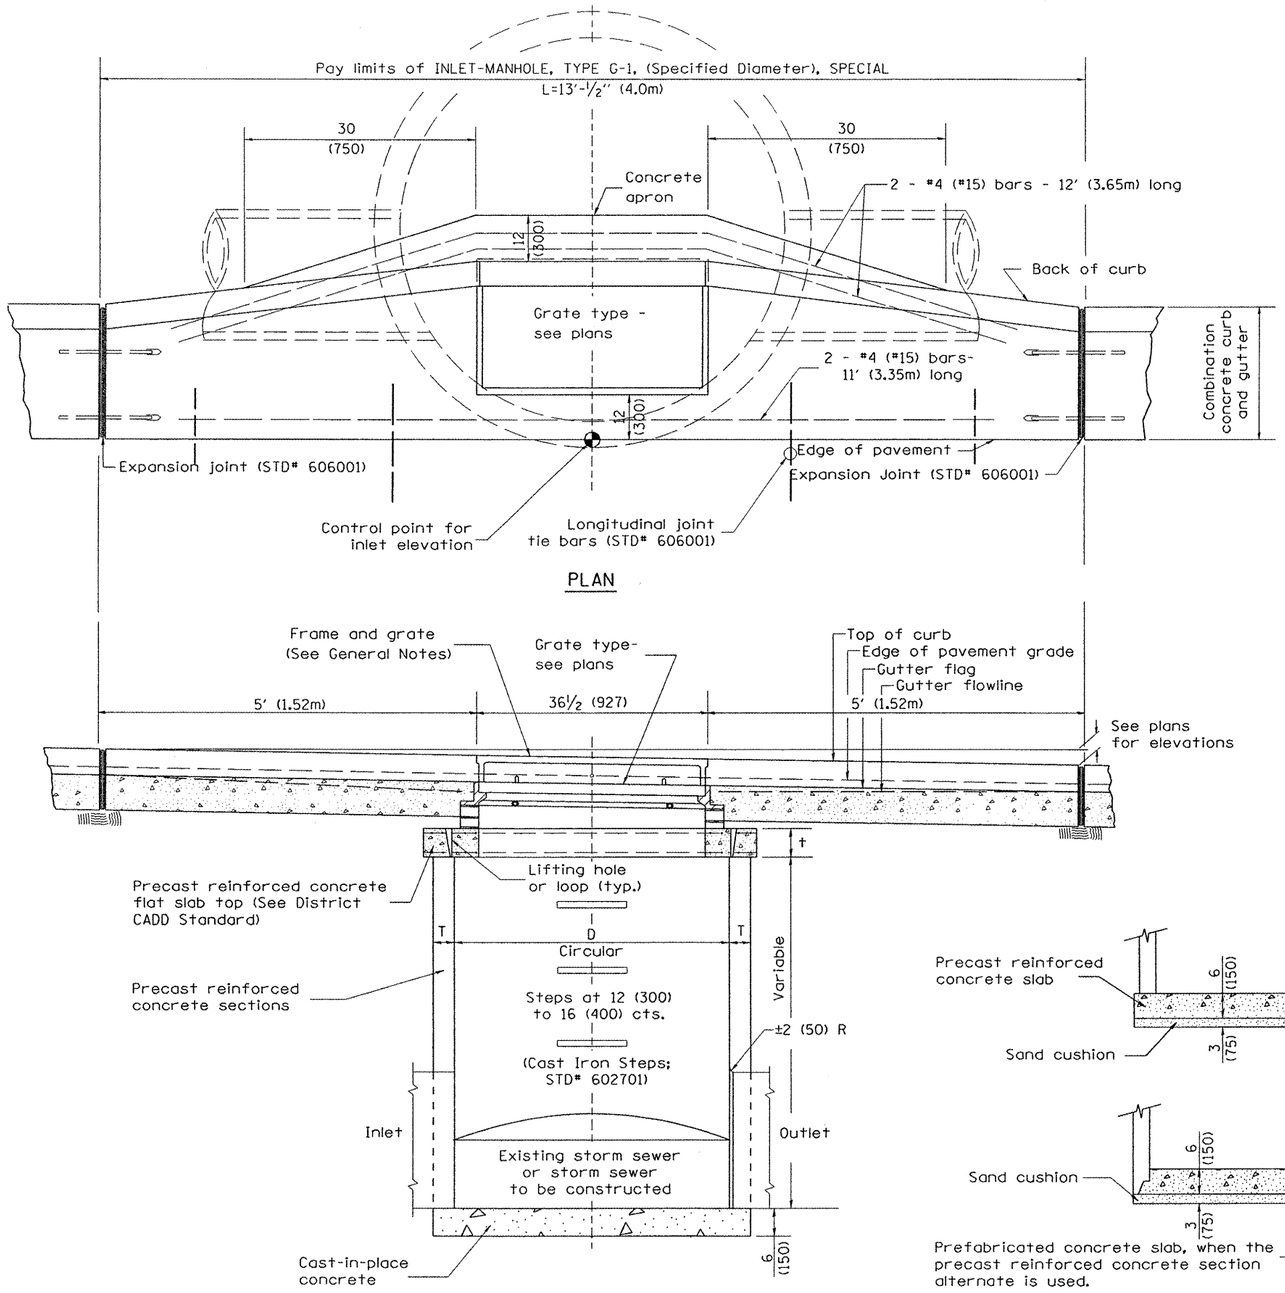

TABLE

D	T	t
4' (1.2m)	5 (125)	6 (150)
5' (1.5m)	6 (150)	8 (200)
6' (1.8m)	7¾ (195)	8 (200)
8' (2.4m)	9 (225)	10 (250)

GENERAL NOTES

1. Inlet-manhole construction shall be in accordance with Section 602 of the Standard Specifications.
2. Combination concrete curb and gutter shall be constructed in accordance with Section 606 of the Standard Specifications.
3. See District CADD Standard 604001-D4 for frame and grates.
4. See District CADD Standard for precast reinforced concrete flat slab top.

All dimensions are in inches (millimeters) unless otherwise noted.

DESIGNER NOTES:

FILE NAME = s:\237\2010\23710006 (CentennialDriveSegmentIVPhII)\CADD\CADD Sheets\D489481-sht-details.dgn	USER NAME = rmbradle	DESIGNED - BAB/RAW	REVISED -
		DRAWN - BAB	REVISED -
	PLOT SCALE = 100.0000 ' / IN.	CHECKED - RMB	REVISED -
	PLOT DATE = 3/3/2011	DATE - 03/02/2011	REVISED -

MAURER ▲ STUTZ, INC.
ENGINEERS SURVEYORS

CENTENNIAL DRIVE PHASE IV
INLET-MANHOLE, TYPE G-1, SPECIAL

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
6745	07-00130-03-PV	TAZEWELL	39	23
		CONTRACT NO. 89481		
		ILLINOIS FED. AID PROJECT		