

TYPICAL SECTION
"NOT TO SCALE"

2-DUCT BANK
"NOT TO SCALE"

3-DUCT BANK
"NOT TO SCALE"


4-DUCT BANK
"NOT TO SCALE"

DUCT BANK NOTES:

- DIMENSIONS FOR CONCRETE COVERAGE AND SEPARATION BETWEEN DUCTS ARE MINIMUM.
- INCLUDE DUCT SPACERS AS MANUFACTURED BY UNDERGROUND DEVICES INC., OR APPROVED EQUAL TO MAINTAIN PROPER SEPARATION OF CONDUITS.
- REBAR IS REQUIRED TO ACCOMMODATE FUTURE DUCT EXTENSIONS & INTERFACE AT DUCT BANK TERMINATIONS. CONCRETE ENCASED DUCT BANKS TERMINATING IN HANDHOLES REQUIRE REBAR AT TERMINATIONS.
- CONDUITS FOR CONCRETE ENCASED DUCT SHALL BE SCHEDULE 40 PVC CONFORMING TO ITEM 110.
- MINIMUM DEPTH OF TOP OF DUCT ENCASEMENT SHALL BE 18" BELOW FINISHED GRADE.
- HIGH VOLTAGE AND LOW VOLTAGE CIRCUITS SHALL NOT BE INSTALLED IN THE SAME RACEWAY, CONDUIT, DUCT, HANDHOLE, OR MANHOLE.
- HOMERUN CABLES FOR A RESPECTIVE CIRCUIT SHALL BE INSTALLED IN THE SAME RACEWAY OR DUCT.
- DUCT INTERFACE TO HANDHOLES OR MANHOLES WILL BE CONSIDERED INCIDENTAL TO THE RESPECTIVE DUCT PAY ITEM.

CABLE & DUCT MARKER NOTES:

- THE COST OF ALL TURF AND PAVEMENT DUCT MARKERS SHALL BE INCIDENTAL TO THE DUCT. THE COST OF ALL CABLE MARKERS SHALL BE INCIDENTAL TO THE CABLE.
- BITUMINOUS PAVEMENT DUCT MARKER AND CONCRETE DUCT MARKER TO BE PROVIDED AT EACH END OF EACH DUCT AS SHOWN ON THE LOCATION PLAN. FOR CONCRETE PAVEMENT, THE LETTER "D" SHALL BE IMPRESSED IN THE PAVEMENT INSTEAD OF THE MARKER. THE LETTER SHALL BE FORMED AS DESCRIBED IN NOTE 4.
- CABLE MARKERS SHALL BE PLACED AT CHANGES OF DIRECTION AND APPROXIMATELY EVERY 200' ALONG CABLE RUNS.
- CONCRETE CABLE MARKERS AND DUCT MARKERS SHALL HAVE LETTERS 4" HIGH, 3" WIDE WITH WIDTH OF STROKE 1/2" AND 1/4" DEEP. ALL LETTERS, NUMBERS AND ARROWS TO BE IMPRESSED.

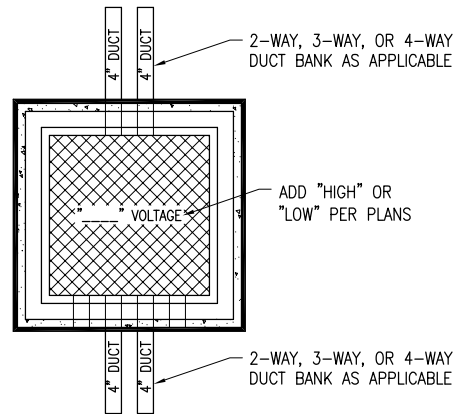


2-WAY, 3-WAY, OR 4-WAY DUCT BANK AS APPLICABLE

ADD "HIGH" OR "LOW" PER PLANS

2-WAY, 3-WAY, OR 4-WAY DUCT BANK AS APPLICABLE

HEAVY DUTY FRAME & LID SUITABLE FOR H-20 LOADING, NEENAH CAT. NO. R-6662-PP OR APPROVED EQUAL

DUCT BANK SHALL TRANSITION TO (OR BE) REINFORCED CONCRETE ENCASED DUCT WHERE ENTERING A HANDHOLE. PROVIDE REINFORCEMENT 3 FT. MIN. BEYOND HANDHOLE. DIRECT BURY DUCT (WITHOUT CONCRETE ENCASEMENT) DOES NOT REQUIRE REBAR & CONCRETE ENCASEMENT AT INTERFACE TO HANDHOLE.

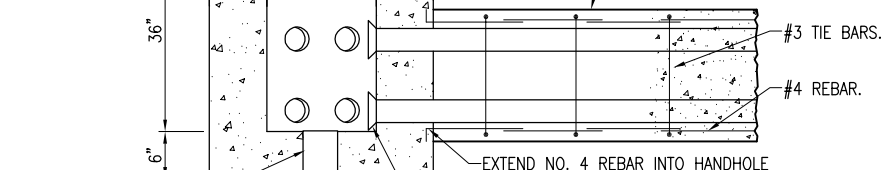

6" SCHED 40 PVC DRAIN PIPE. FILL WITH PEA GRAVEL TO ACCOMMODATE DRAINAGE. NOTE 6" OF CA-7 GRAVEL MAY BE PROVIDED, INSTEAD OF 6" CONCRETE FLOOR WITH DRAIN PIPE, AT CONTRACTORS OPTION.


EXTEND NO. 4 REBAR INTO HANDHOLE APPROX 3". PROVIDE 90° "L" HOOK ON REBAR TERMINATION IN HANDHOLE. (TYP.) OR EXTEND REBAR EPOXY ANCHORED INTO HANDHOLE WITH 4" EMBEDMENT.

PROVIDE CONDUIT BUSHING OR BELL AT TERMINATION IN HANDHOLE (TYP.)

NOTES:


- LIDS FOR LOW VOLTAGE HANDHOLES SHALL BE LABELED "LOW VOLTAGE". LIDS FOR HIGH VOLTAGE HANDHOLES SHALL BE LABELED "HIGH VOLTAGE". COORDINATE LETTERING WITH MFR.
- HANDHOLES MAY BE CAST IN PLACE OR PRECAST. PRECAST MANUFACTURERS MUST BE ON THE IDOT (ILLINOIS DEPT. OF TRANSPORTATION) APPROVED LIST OF CERTIFIED PRECAST CONCRETE PRODUCERS.
- ALL CORING, INTERFACE, AND LABOR ASSOCIATED WITH CONDUIT, DUCT, CABLE IN UNIT DUCT, AND / OR CABLE ENTRIES WILL BE CONSIDERED INCIDENTAL TO THE INSTALLATION OF THE HANDHOLE AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

ELECTRICAL HANDHOLE
"NOT TO SCALE"

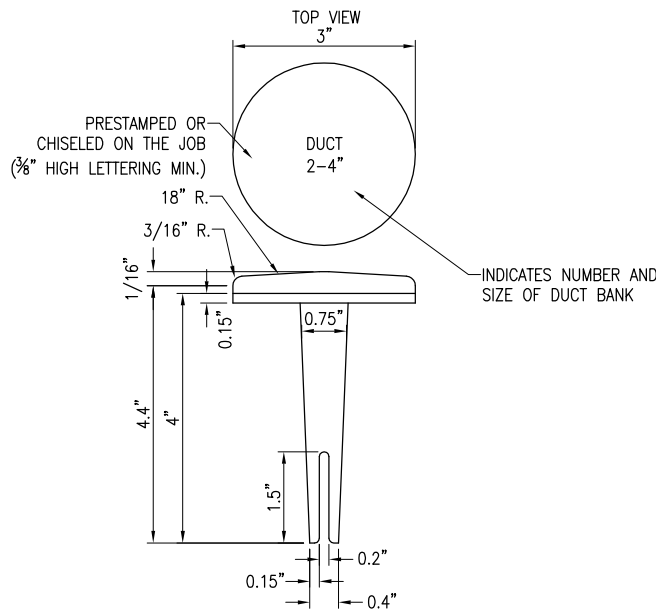


BITUMINOUS PAVEMENT DUCT MARKERS
"NOT TO SCALE"


NOTE: TOP OF MARKER SHALL BE FLUSH WITH FINISHED PAVEMENT SURFACE. MARKER MAY BE INSTALLED IN A DRILLED HOLE AND SECURED WITH EPOXY GLUE.

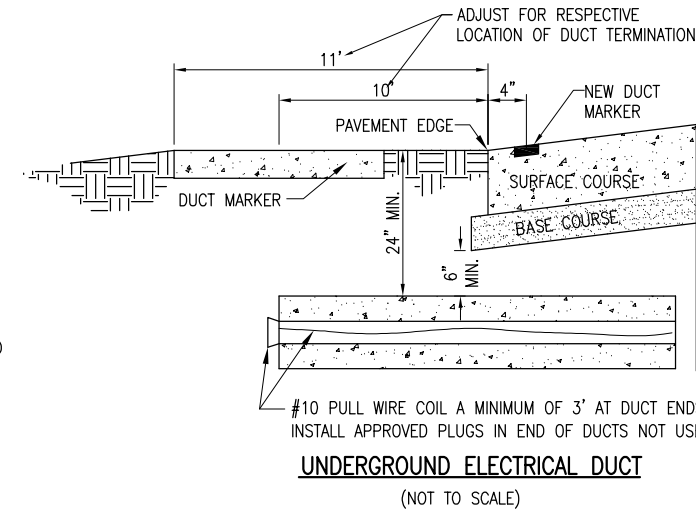


UNDERGROUND ELECTRICAL DUCT
"NOT TO SCALE"

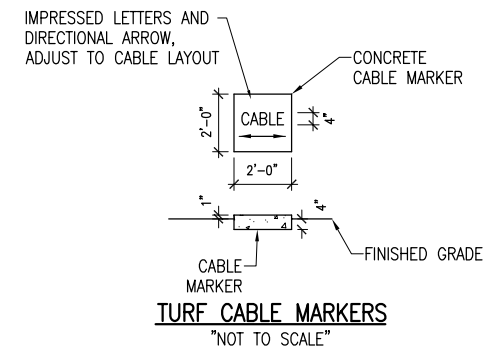

TURF CABLE MARKERS
"NOT TO SCALE"

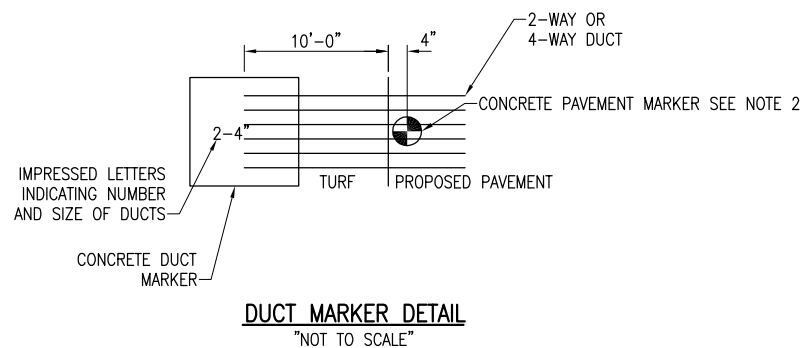

DUCT MARKER DETAIL
"NOT TO SCALE"

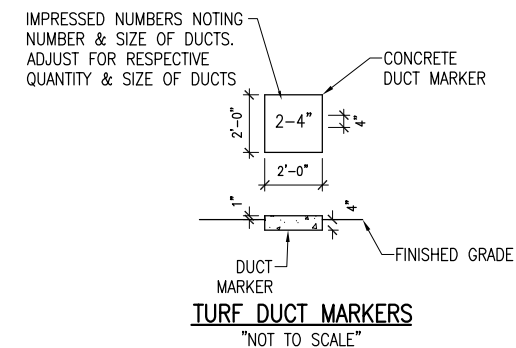

TURF DUCT MARKERS
"NOT TO SCALE"

REVISION	
DATE	
EDGAR COUNTY AIRPORT PARIS, ILLINOIS	
A.I.P. PROJ.: 3-17-0077-B13	
IL PROJ.: PRG-4018	

Hanson Proj. No. 10A0053	12/23/10
Filename E-502.DWG	KNL
Scale AS SHOWN	MLH
Date 03/10/11	CAH
LAYOUT	REVIEWED
DRAWN	

HANSON
Professional Services Inc. 2011
1525 South Sixth Street
Springfield, Illinois 62703-2886
www.hanson-inc.com
Offices Nationwide

CONSTRUCT CROSSWIND
RUNWAY 18-36
ELECTRICAL DETAILS
SHEET 2