F.A.P. ROUT NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
353	(12&13) WRS-4	WILL	608	437
FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT-		

Contract No. 62478

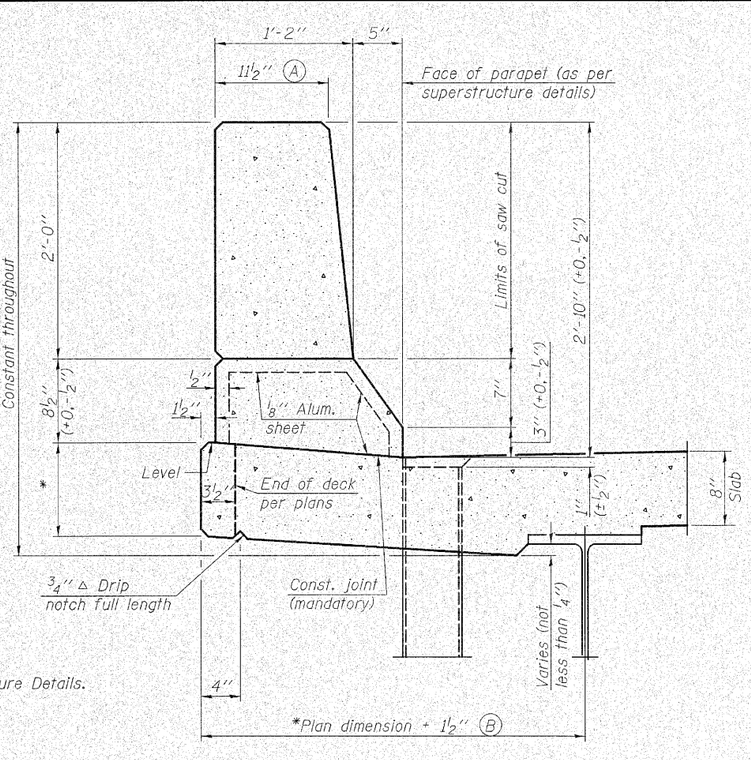

* See Superstructure Details.

SECTION
(Showing dimensions)

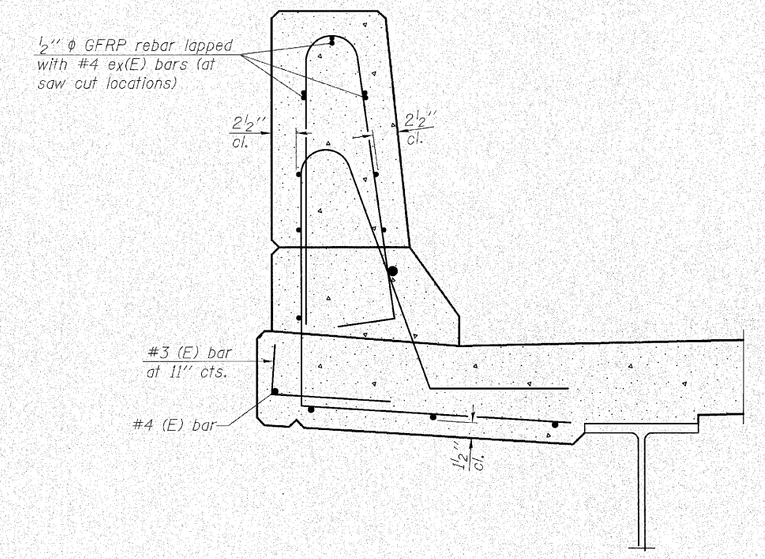

SECTION
(Showing reinforcement clearances for slip forming and additional reinforcement bars)

GENERAL NOTES

All dimensions shall remain the same as shown on superstructure details, except dimensions A and B which are to be revised as shown to provide additional clearance. Additional concrete needed to revise dimension A and B = 0.0165 cu. yds./ft. of parapet.

Place aluminum sheet in curb portion at and near piers. Full thickness saw cut at all joint locations in lieu of cork joint filler.

Steel superstructure shown. Other superstructure types similar.



#3 (E) BAR

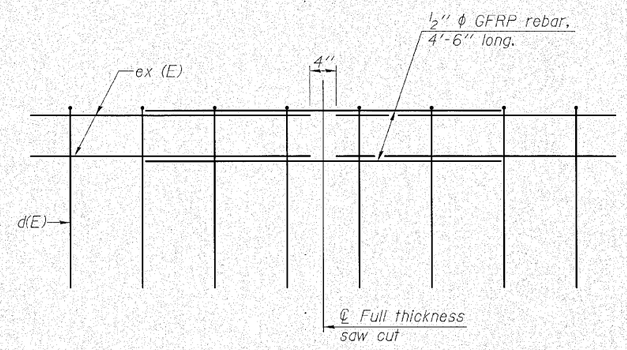

GFRP REBAR STIFFENING DETAIL
(Place as shown in parapet section at each parapet joint location.)

S24 OF S26

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
CONCRETE PARAPET
SLIPFORIMG OPTION
U.S. RTE. 30 OVER HICKORY CREEK
STATION 493+89.73
STRUCTURE NUMBER 099-0311

SCALE: None **DRAWN BY:** C. Cooney
DATE: June 11, 2010 **CHECKED BY:** G. Hatlestad

SFP-34 11-1-09

CIVILTECH
450 E Devon Ave, Suite 300
Itasca, Illinois 60143
Tel: 630.773.3900 Fax: 630.773.3975
www.civiltechinc.com

DGN: 8d0d3.dgn
DATE: 6/30/2010
J:\1351\Cad\sheets\structure\24-slipforming opt.dgn