



## GENERAL NOTES

- 1. WHEN MEDIANS ARE PRESENT, PAVEMENT MARKINGS ARE TO BE PLACED ADJACENT TO MEDIANS.
- SOME OF THE INFORMATION INCLUDED WITH THIS DETAIL MAY NOT BE APPLICABLE TO THIS IMPROVEMENT.
- PAVEMENT MARKINGS ARE TO BE EXTENDED THROUGH OMISSIONS WHEN APPLICABLE.
- A STRIPING KEY IS AVAILABLE ELSEWHERE AND SHALL BE SHOWN WHERE THE QUANTITIES ARE LISTED.
- 5. FINAL PAVEMENT MARKINGS SHALL BE IN PLACE PRIOR TO PLACING ANY RAISED REFLECTIVE PAVEMENT MARKERS.
- 6. THE FOLLOWING CRITERIA SHALL BE USED FOR SELECTING THE DIAGONAL PAVEMENT MARKING SPACING, <30 MPH USE 15' (<50 km/h USE 4.5 m) 30-45 MPH USE 20' (50-75 km/h USE 6.0 m) >45 MPH USE 30' (>75 km/h USE 9.0 m)

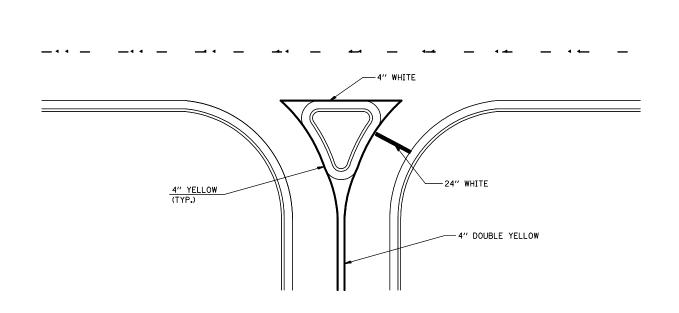

RIGHT IN - RIGHT OUT ACCESS

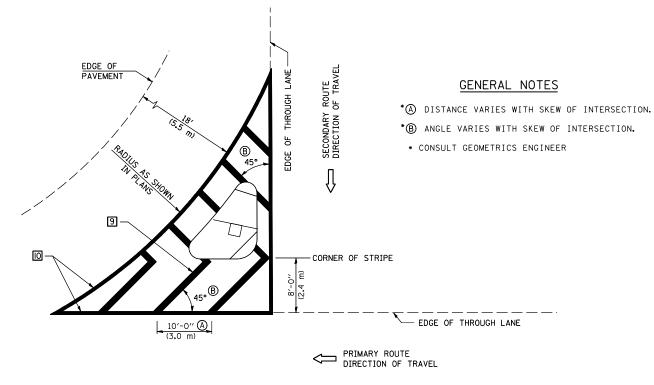

ISLAND

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

DICTRICT E DETAIL NO TOCCASAS

								DISTRICT S DETAIL NO. /800AAAA		
FILE NAME =	USER NAME = bowerml	DESIGNED -	REVISED - 11/06			PAVEMENT MARKING AND MARKERS	F.A.P.	SECTION		TOTAL SHEET
c:\pw_work\pwidot\bowerm1\d0128032\7077	5-sht-details.dgn	DRAWN -	REVISED -	STATE OF ILLINOIS		(RURAL & URBAN APPLICATIONS)	730 (61.62	Z.62R.62Z-1.3)RS-1.2.3	MCLEAN	89 88
	PLOT SCALE = 40.00000 '/ IN.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	(NUNAL & UNDAN APPLICATIONS)			CONTRACT		NO. 70775
	PLOT DATE - 3/26/2009	DATE -	PEVISED -		SCALE.	SHEET NO 3 OF A SHEETS STA TO STA	CCD DOAD DIG	T NO THE THOTO COD ATD		