SIGN DETAIL

1:75

EB-TR-36
STA. 401+40

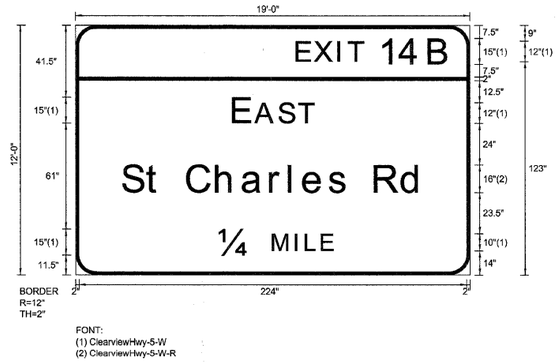

SIGN NUMBER	name
WIDTH x HGHT.	19'-0" x 12'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																				LENGTH	SERIES/SIZE
E	X	I	T	1	4	B																																ClearviewHwy-5-W
128.3	138.6	152.3	158.2	176.8	188.4	205.1																															88.1	12,15
E	A	S	T																																			ClearviewHwy-5-W
91.7	104.4	118.2	129.6																																		46.5	15,12
S	t		C	h	a	r	l	e	s		R	d																										ClearviewHwy-5-W-R
27.4	41.5	49.4	64.8	81.6	96.9	112.8	123.8	132.1	146.8	157	173.3	189																									173.1	1613
¼	M	I	L	E																																		ClearviewHwy-5-W
83.4	114.4	127.5	133.4	142.5																																	65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 13 OF 58 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	341
		CONTRACT NO. 60157		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		