SIGN DETAIL

1:75

WB-GM-52B
STA. 433+00

SIGN NUMBER	name	
WIDTH x HGHT.	17'-0" x 7'-0"	
BORDER WIDTH	0.5"	
CORNER RADIUS	1.5"	
MOUNTING	Ground	
BACKGROUND	TYPE:	Reflective
	COLOR:	White
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	Black/Black

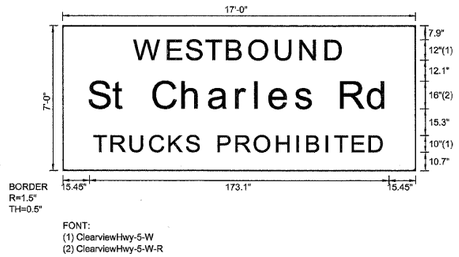

SYMBOL	ROT	X	Y	WID	HT

Panel Style: whiteboard.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																						LENGTH	SERIES/SIZE
W	E	S	T	B	O	U	N	D																															ClearviewHwy-5-W
41.8	61.3	72	83.4	95.6	108.4	123.9	137.9	152.5																													120.3	12
S	t		C	h	a	r	l	e	s		R	d																											ClearviewHwy-5-W-R
15.4	29.5	37.4	52.8	69.6	84.8	100.8	111.8	120.1	134.8	145	161.3	177																									173.1	16/13
T	R	U	C	K	S		P	R	O	H	I	B	I	T	E	D																							ClearviewHwy-5-W
18.4	28.5	39.5	50.8	62	71.9	79.1	90.3	100.7	111.3	124.1	135.7	141.7	152.7	157.7	167.9	177.6																					167.3	10

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNING DETAILS	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
$FILEL$	DRAWN - SEW	REVISED -				290	2009-099BR	COOK/DUPAGE	394	373
USER NAME = $USER$	CHECKED - FML	REVISED -						CONTRACT NO. 60I57		
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -			SCALE: N.T.S. / SHEET NO. 45 OF 58 SHEETS / STA. / TO STA.	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		