SIGN DETAIL
1:75

WB-BM-86
STA. 673+00

SIGN NUMBER	name
WIDTH x HGHT.	13'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

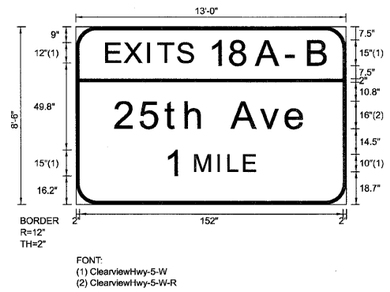

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																					LENGTH	SERIES/SIZE
E	X	I	T	S	1	8	A	–	B																													ClearviewHwy-5-W
18.1	28.4	42.1	48	59.3	77.9	90	104.7	123.1	134.9																												128.2	12,15
2	5	t	h		A	v	e																															ClearviewHwy-5-W-R
22.8	37.8	51.8	63.6	74.7	90.2	106.7	121.4																														110.4	16/13
1	M	I	L	E																																		ClearviewHwy-5-W
52.4	69.2	82.3	88.2	97.3																																	51.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 19 OF 34 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(313), ETC., 3435) RS-6	COOK	215	151
		CONTRACT NO. 60K10		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		