SIGN DETAIL

1:75

WB-TR-94
STA. 734+30

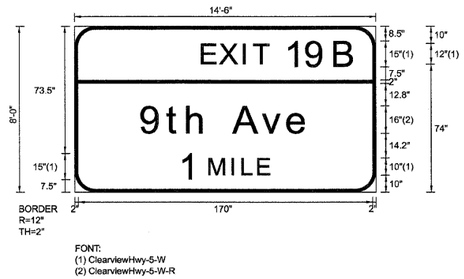

SIGN NUMBER	name	
WIDTH x HGHT.	14'-6" x 8'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

							LENGTH	SERIES/SIZE
E	X	I	T	1	9	B		ClearviewHwy-5-W
74.1	84.4	98	104	122.6	134.6	150.8	88.1	12,15
9	t	h		A	v	e		ClearviewHwy-5-W-R
39	53.6	65.5	76.5	92	108.6	123.3	96	16/13
1	M	I	L	E				ClearviewHwy-5-W
61.4	78.2	91.3	97.2	106.3			51.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 25 OF 34 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3131, ETC., 3435) RS-6	COOK	215	157
		CONTRACT NO. 60K10		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		