SIGN DETAIL
1:75

WB-BM-149
STA. 1212+90

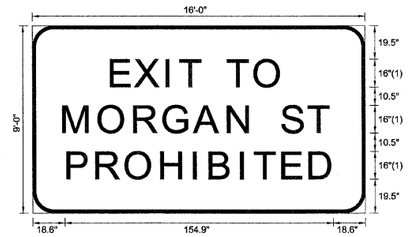

FONT:
(1) ClearviewHwy-5-W

SIGN NUMBER	name	
WIDTH x HGHT.	16'-0" x 9'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	White
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	Red/Black

SYMBOL	ROT	X	Y	WID	HT

Panel Style: Regulatory_Signs.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)										LENGTH	SERIES/SIZE
E	X	I	T		T	O					ClearviewHwy-5-W
46.1	59.8	78	85.9	97.4	113.4	129				97.8	16
M	O	R	G	A	N		S	T			ClearviewHwy-5-W
18.6	38.9	59.5	76.3	94.1	113.7	126.8	144.7	159.9		152.8	16
P	R	O	H	I	B	I	T	E	D		ClearviewHwy-5-W
20.9	37.6	54.4	75	93.6	103.1	120.8	128.7	145	160.6	152.5	16

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 41 OF 46 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2525, ETC., 2727) RS-8	COOK	201	148
		CONTRACT NO. 60K11		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		