


NOTES

1. FOR SYMBOL LIST AND ABBREVIATIONS, SEE SHEET LT-01.
2. ALL WIRING SHALL BE UNIT DUCT, 600V, 4-TC NO.6, 1/C NO.6 GROUND, (XLP-TYPE USE), 1 1/4" DIA. POLYETHYLENE.
3. POLE SET-BACK SHALL BE MEASURED FROM BACK OF THE CURB TO CENTER OF THE POLE/BASE.
4. CONDUIT SHALL BE INSTALLED PUSHED. MAINTAIN DRIVEWAY OPEN AT ALL TIMES.
5. POLE SHALL BE WIRED TO CITY OF NAPERVILLE CONTROLLER.
6. BOLT CIRCLE AND ANCHOR BOLTS NUMBER AND LAYOUT OF THE FOUNDATION SHALL MATCH THE RE-INSTALLED POLE.

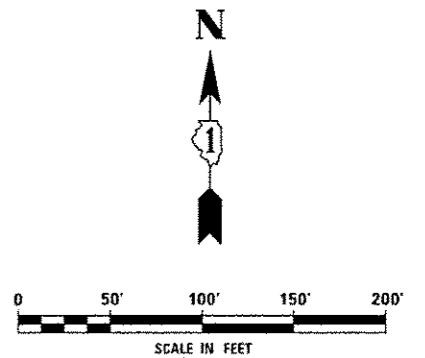

DESIGNED <i>MCP</i>	REVISED - ADDENDUM A 02/22/2013	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LIGHTING PLANS - BROOKDALE ROAD		F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEET NO.
DRAWN <i>MLB</i>	REVISED -		338	(112 & 113) WRS-6	DUPAGE	734	482	
CHECKED <i>MCP</i>	REVISED -		LT-11		CONTRACT NO. 60R31			
DATE <i>09/07/2012</i>	REVISED -		SCALE: AS SHOWN SHEET NO. 6 OF 8 SHEETS STA. 10 STA.		ILLINOIS FED. AID PROJECT			