SIGN DETAIL
1:75

WB-BM-123
STA. 1051+55

SIGN NUMBER	name
WIDTH x HGHT.	19'-6" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

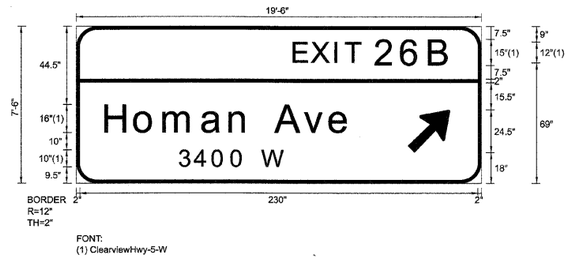

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	191.5	18	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

									LENGTH	SERIES/SIZE
E	X	I	T	2	6	B				ClearviewHwy-5-W
126	136.3	149.9	155.9	173.5	188.6	204.6			90	12,15
H	o	m	a	n		A	v	e		ClearviewHwy-5-W-R
17.1	34	50.7	72.9	88.9	100	115.4	132	146.7	141.3	16/13
3	4	0	0		W					ClearviewHwy-5-W-R
59.5	68.6	78.9	89.8	97.9	107.5				61.2	10

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNING DETAILS
$FILEL$	DRAWN - SEW	REVISED -			
USER NAME = $USER$	CHECKED - SEW	REVISED -			
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -			SCALE: N.T.S. SHEET NO. 29 OF 34 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2727, ETC., 3131)RS-7	COOK	216	153
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		