

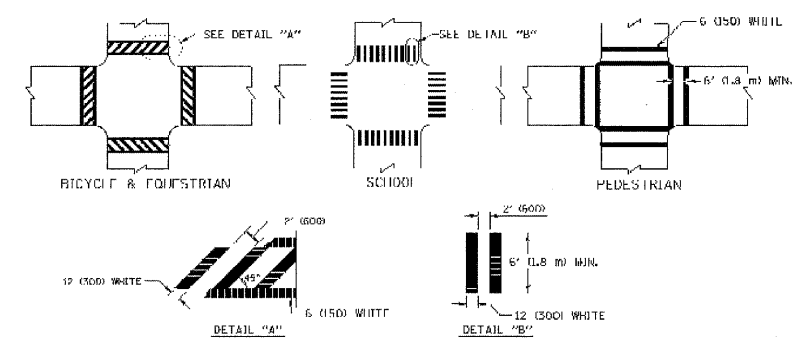
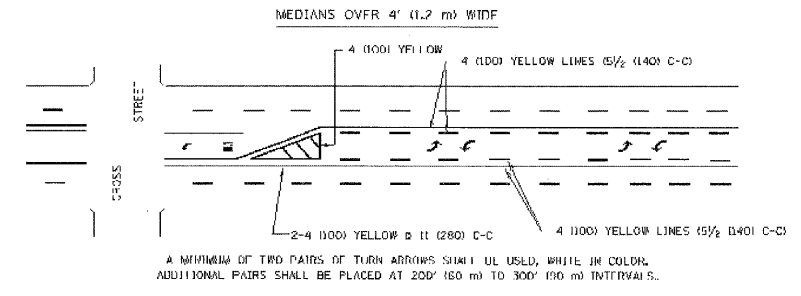



TYPICAL LANE AND EDGE LINE MARKING

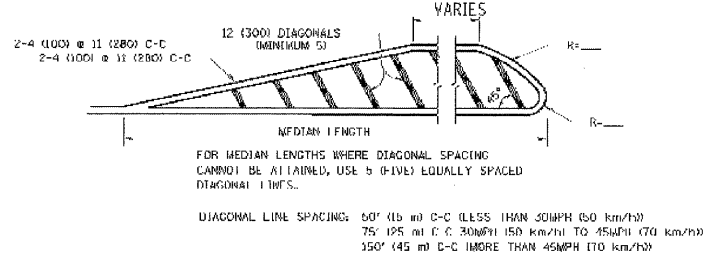

TYPICAL CROSSWALK MARKING

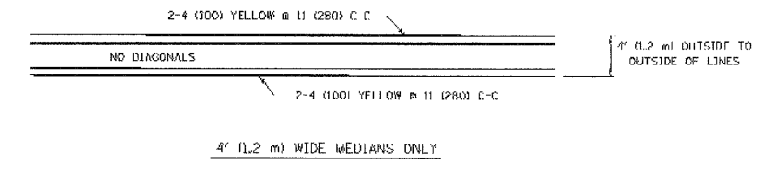


TYPICAL PAINTED MEDIAN MARKING



TYPICAL LEFT (OR RIGHT) TURN LANE

TYPICAL TURN LANE MARKING

HULL SIZE LETTERS 8" (2.4 m) AND ARROWS SHALL BE USED.  
 1/2 AREA = 15.6 SQ. FT. (1.5 m<sup>2</sup>) ONLY AREA = 20.8 SQ. FT. (1.9 m<sup>2</sup>)  
 \* TURN LANES IN EXCESS OF 400' (120 m) IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW - "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF ARROW "ONLY".

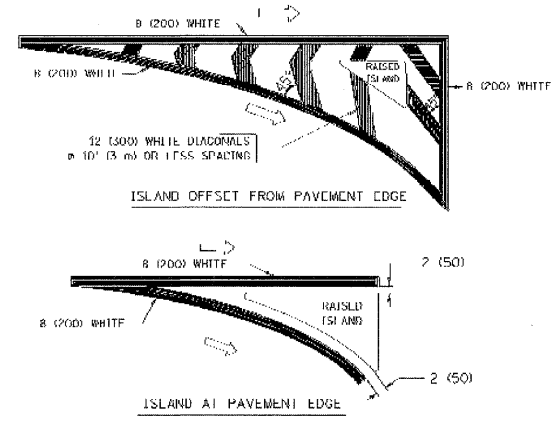

TYPICAL ISLAND MARKING

| TYPE OF MARKING   | WIDTH OF LINE   | PATTERN                         | COLOR   | SPACING / REMARKS  |
|---|---|---------------------------------|---|--|
| CENTERLINE ON 2 LANE PAVEMENT                                 | 4 (100)   | SKIP-DASH                       | YELLOW  | 10' (3 m) LINE WITH 30' (9 m) SPACE  |
| CENTERLINE ON MULTI-LANE UNDIVIDED PAVEMENT                   | 2 @ 4 (100)   | SOLID                           | YELLOW  | 11 (280) C-C   |
| NO PASSING ZONE LINES FOR ONE DIRECTION FOR BOTH DIRECTIONS   | 4 (100)<br>2 @ 4 (100)  | SOLID<br>SKIP-DASH              | YELLOW<br>YELLOW                                | 5/8 (140) C-C FROM SKIP-DASH CENTERLINE<br>11 (280) C-C<br>DON'T SKIP-DASH CENTERLINE BETWEEN  |
| LANE LINES  | 4 (100)<br>5 (125) ON FREEWAYS  | SKIP-DASH<br>SKIP-DASH          | WHITE<br>WHITE                                  | 10' (3 m) LINE WITH 30' (9 m) SPACE  |
| DOTTED LINES EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS | SAME AS LINE BEING EXTENDED   | SKIP-DASH                       | SAME AS LINE BEING EXTENDED                     | 2' (600) LINE WITH 6' (1.8 m) SPACE  |
| EDGE LINES  | 4 (100)   | SOLID                           | YELLOW LEFT<br>WHITE RIGHT                      | OUTLINE MOUNTABLE MEDIANS IN YELLOW. EDGE LINES ARE NOT USED NEXT TO BARRIER CURB  |
| TURN LANE MARKINGS  | 6 (150) LINE, FULL SIZE LETTERS & SYMBOLS (8" (2.4 m))  | SOLID                           | WHITE   | SEE TYPICAL TURN LANE MARKING DETAIL   |
| TWO WAY LEFT TURN MARKING                                     | 2 @ 4 (100) EACH DIRECTION<br>8' (2.4 m) LEFT ARROW   | SKIP-DASH AND SOLID<br>IN PAIRS | YELLOW<br>WHITE                                 | 10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH 5/8 (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE<br>SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL                |
| CROSSWALK LINES (PEDESTRIAN & LONGITUDINAL BARS (SCHOOL))     | 2 @ 6 (150)<br>12 (300) @ 45°<br>12 (300) @ 90°   | SOLID<br>SOLID<br>SOLID         | WHITE<br>WHITE<br>WHITE                         | NOT LESS THAN 6' (1.8 m) APART<br>2' (600) APART<br>2' (600) APART<br>SEE TYPICAL CROSSWALK MARKING DETAILS.   |
| STOP LINES  | 24 (600)  | SOLID                           | WHITE   | PLACE 6' (1.8 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK. IF POSSIBLE, OTHERWISE, PLACE AT DESIRED STOPPING POINT, PARALLEL TO CROSSWALK CENTERLINE, WHERE POSSIBLE. |
| PAINTED MEDIANS   | 2 @ 4 (100) WITH 12 (300) DIAGONALS @ 45°<br>NO DIAGONALS USED FOR 4' (1.2 m) WIDE MEDIANS            | SOLID                           | YELLOW TWO WAY TRAFFIC<br>WHITE ONE WAY TRAFFIC | 11 (280) C-C 10' (3 m) DOUBLE LINE<br>SEE TYPICAL PAINTED MEDIAN MARKING.  |
| CURB MARKING AND DIVERGENT LINES                              | 8 (200) WITH 12 (300) DIAGONALS @ 45°   | SOLID                           | WHITE   | DIAGONALS:<br>15' (4.5 m) C-C (LESS THAN 30MPH (50 km/h))<br>20' (6 m) C-C (30MPH (50 km/h) TO 45MPH (70 km/h))<br>30' (9 m) C-C (OVER 45MPH (70 km/h))              |
| RAILROAD CROSSING   | 24 (600) TRANSVERSE LINES @ 90° 15' (4.5 m) MIN. (1.8 m) MIN. LUGL LINES 16 (400) LINE 10' (3 m) MIN. | SOLID                           | WHITE   | SEE STATE STANDARD 780001<br>AREA OF: "1" 3.0 SQ. FT. (0.33 m <sup>2</sup> ) LUGL "1" 5.0 SQ. FT. (0.50 m <sup>2</sup> )   |
| SHOULDER DIAGONALS  | 12 (300) @ 45°  | SOLID                           | WHITE - RIGHT<br>YELLOW LEFT                    | 50' (15 m) C-C (LESS THAN 30MPH (50 km/h))<br>75' (23 m) C-C (30 MPH (50 km/h) TO 45MPH (70 km/h))<br>150' (45 m) C-C (OVER 45MPH (70 km/h))                         |

FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.

All dimensions are in inches (millimeters) unless otherwise shown.

| REVISIONS  |          |
|------------|----------|
| NAME       | DATE     |
| J. RAMMACH | 03-19-90 |
| C. JUCIUS  | 10-27-94 |
|            | 09-09-09 |

ILLINOIS DEPARTMENT OF TRANSPORTATION

DISTRICT ONE  
 TYPICAL PAVEMENT  
 MARKINGS

SCALE: NONE  
 DRAWN BY CADD  
 CHECKED BY TC-13

USER NAME = dravacog