


DATE PLOTTED: 11/11/11  
 PLOTTED BY: J. GARDNER  
 CHECKED BY: J. GARDNER  
 NO. OF WAY CHECKED: 1  
 NO. OF WAY NOT CHECKED: 0  
 FILE NAME: s:\p1\6600-6699\6628\08A\micro\Drainage P & U\DrainageCenter P&U-06.dgn

FILE NAME: s:\p1\6600-6699\6628\08A\micro\Drainage P & U\DrainageCenter P&U-06.dgn  
 SURVEYED: 11/11/11  
 PLOTTED: 11/11/11  
 CHECKED: J. GARDNER  
 DATE: 11/11/11  
 NO. OF WAY CHECKED: 1  
 NO. OF WAY NOT CHECKED: 0

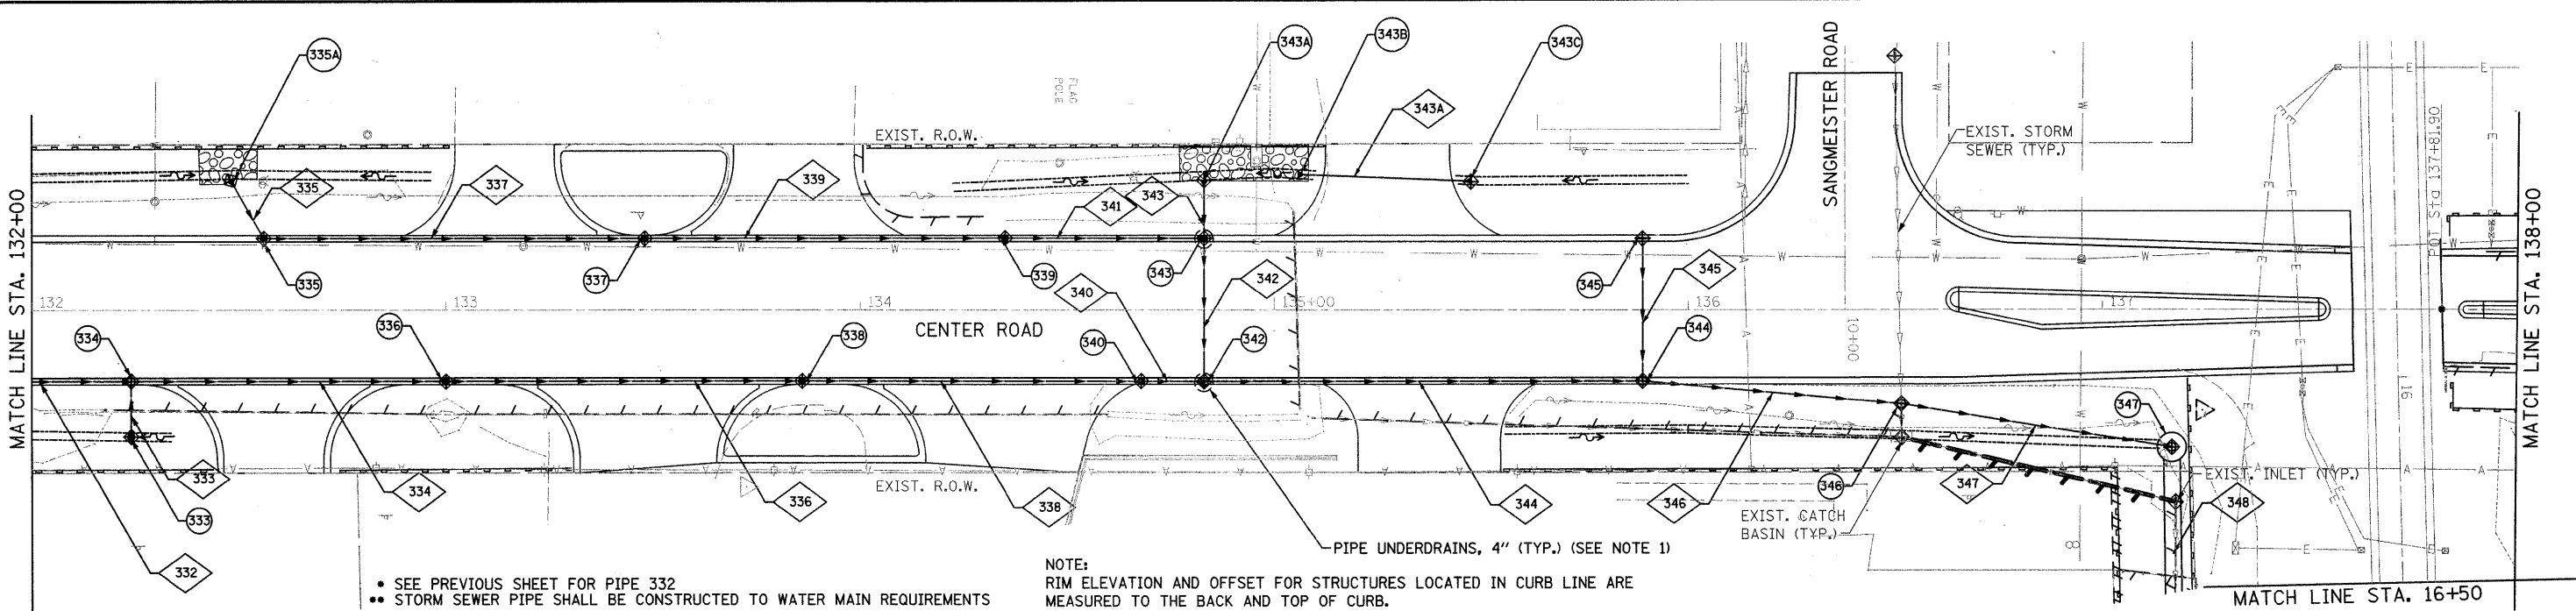

- SEE PREVIOUS SHEET FOR PIPE 332
- STORM SEWER PIPE SHALL BE CONSTRUCTED TO WATER MAIN REQUIREMENTS

NOTE:  
 RIM ELEVATION AND OFFSET FOR STRUCTURES LOCATED IN CURB LINE ARE MEASURED TO THE BACK AND TOP OF CURB.

SEWER PIPE SCHEDULE						
STR NO.	PIPE MATERIAL	PIPE SIZE (IN)	PIPE LENGTH (FT)	INVERT ELEVATION (PIPE ONLY)		Slope (%)
				UP	DOWN	
333	SS, CL A, TY II	18	14.0	758.79	758.74	0.35%
334	SS, CL A, TY II	36	76.0	758.61	758.41	0.26%
335	SS, CL A, TY I	18	10.0	762.58	762.23	3.50%
336	SS, CL A, TY II	36	81.0	758.31	758.09	0.27%
337	SS, CL A, TY II	24	92.0	760.49	760.08	0.45%
338	SS, CL A, TY II	36	87.0	757.99	757.74	0.29%
339	SS, CL A, TY II	24	87.0	759.98	759.69	0.33%
340	SS, CL A, TY II	36	15.0	757.64	757.62	0.13%
341	SS, CL A, TY II	24	48.0	759.59	759.47	0.24%
342	SS, CL A, TY II**	30	36.0	758.80	758.62	0.50%
343	SS, CL A, TY I	15	9.0	761.57	761.34	2.60%
343A	CULV, CL A, TY I	12	30.0	762.41	762.07	1.14%
344	SS, CL A, TY II	36	97.0	757.52	757.29	0.24%
345	SS, CL A, TY II	12	35.0	761.31	761.17	0.40%
346	SS, CL A, TY II	36	63.0	757.19	757.00	0.30%
347	SS, CL A, TY II**	36	65.0	756.90	756.38	0.80%
348	4X2 BOX CULVERT	-	290.0	756.28	755.00	0.44%

DRAINAGE STRUCTURE SCHEDULE						
STR NO.	STR TY	STATION	OFFSET	RIM EL.	CASTING TYPE	TYPE OF WORK TO BE COMPLETED
334	MH	132+24	18.1 RT	766.18	TYPE 11	MH, TY A, 6' DIA
335	CB	132+56	18.1 LT	765.96	TYPE 11	CB, TY A, 4' DIA
335A	FES	132+48	30.9 LT	762.79	-	PRECAST REINF. CONC, FES, 18"
336	CB	133+00	18.1 RT	765.78	TYPE 11	CB, TY A, 5' DIA
337	CB	133+48	18.1 LT	765.59	TYPE 11	CB, TY A, 4' DIA
338	CB	133+86	18.1 RT	765.44	TYPE 11	CB, TY A, 5' DIA
339	CB	134+35	18.1 LT	765.24	TYPE 11	CB, TY A, 4' DIA
340	CB	134+68	18.1 RT	765.18	TYPE 11	CB, TY A, 5' DIA
342	MH	134+83	18.1 RT	765.19	TYPE 1	MH, TY A, 7' DIA
343	CB	134+83	18.1 LT	765.19	TYPE 11	CB, TY A, 5' DIA
343A	FES	134+83	30.9 LT	761.73	-	PRECAST REINF. CONC, FES, 15"
343B	FES	135+06	32.7 LT	762.00	-	PRECAST REINF. CONC, FES, 12"
343C	FES	135+47	31.2 LT	762.48	-	PRECAST REINF. CONC, FES, 12"
344	MH	135+89	18.1 RT	765.79	TYPE 11	MH, TY A, 6' DIA
345	INL	135+89	18.1 LT	765.79	TYPE 11	INLET, TY A, 2' DIA
346	MH	136+51	22.9 RT	765.10	TYPE 8	MH, TY A, 6' DIA
347	MH	137+17	33.4 RT	763.06	TYPE 8	MANHOLES, SPECIAL

- NOTES:  
 1. SAG POINT AT 134+83, SEE UNDERDRAIN DETAIL

