

INDEX OF SHEETS

1	COVER SHEET
2	GENERAL NOTES
3-6	SUMMARY OF QUANTITIES
7-9	TYPICAL SECTIONS
10-12	SCHEDULES
13	PERMANENT SURVEY MARKERS
14-17	CURVE DATA
18-21	PAVEMENT MARKING DETAILS
22-26	DETAILS

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PROPOSED
HIGHWAY PLANS

FAP ROUTE 17 (IL 64)
SECTION (124)I & RS-3
PROJECT: ACHSIP-0017 (130)
IL 64 FROM JUST WEST OF
OGLE COUNTY LINE TO CLARE ROAD
DEKALB COUNTY

C-93-029-14


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
17	(124)I & RS-3	DEKALB	26	1
		ILLINOIS	CONTRACT NO. 66D36	

LIST OF ILLINOIS DOT HIGHWAY STANDARDS

000001-06	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
001006	DECIMAL OF AN INCH AND OF A FOOT
280001-07	TEMPORARY EROSION CONTROL SYSTEMS
482001-02	HMA SHOULDER ADJACENT TO FLEXIBLE PAVEMENT
482011-03	HMA SHOULDER STRIPS/SHOULDERS WITH RS OR WIDENING & RS PROJECTS
542401-01	METAL END SECTION FOR PIPE CULVERTS
635001-01	DELINEATORS
635008-03	REFLECTOR AND TERMINAL MARKER PLACEMENT
635011-02	REFLECTOR MARKER AND MOUNTING DETAILS
642001-02	SHOULDER RUMBLE STRIPS, 16 INCH
642006	SHOULDER RUMBLE STRIPS, 8 INCH
667101-02	PERMANENT SURVEY MARKERS
701001-02	OFF-ROAD OPERATIONS 2L, 2W, MORE THAN 15' (4.5 m) AWAY
701006-05	OFF-ROAD OPERATIONS 2L, 2W, 15' (4.5 m) TO 24" (600 mm) FROM PAVEMENT EDGE
701011-04	OFF-ROAD MOVING OPERATIONS 2L, 2W, DAY ONLY
701301-04	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701311-03	LANE CLOSURE, 2L, 2W, MOVING OPERATIONS - DAY ONLY
701326-04	LANE CLOSURE, 2L, 2W, PAVEMENT WIDENING, FOR SPEEDS ≥ 45 MPH
701901-03	TRAFFIC CONTROL DEVICES
780001-04	TYPICAL PAVEMENT MARKINGS
781001-03	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS




PROJECT BEGINS STA. 2079 + 00 **PROJECT ENDS** STA. 323 + 00

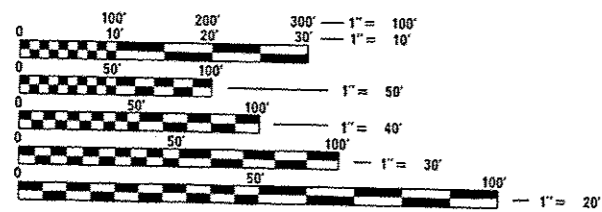

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
 JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
 1-800-892-0123
 OR 811

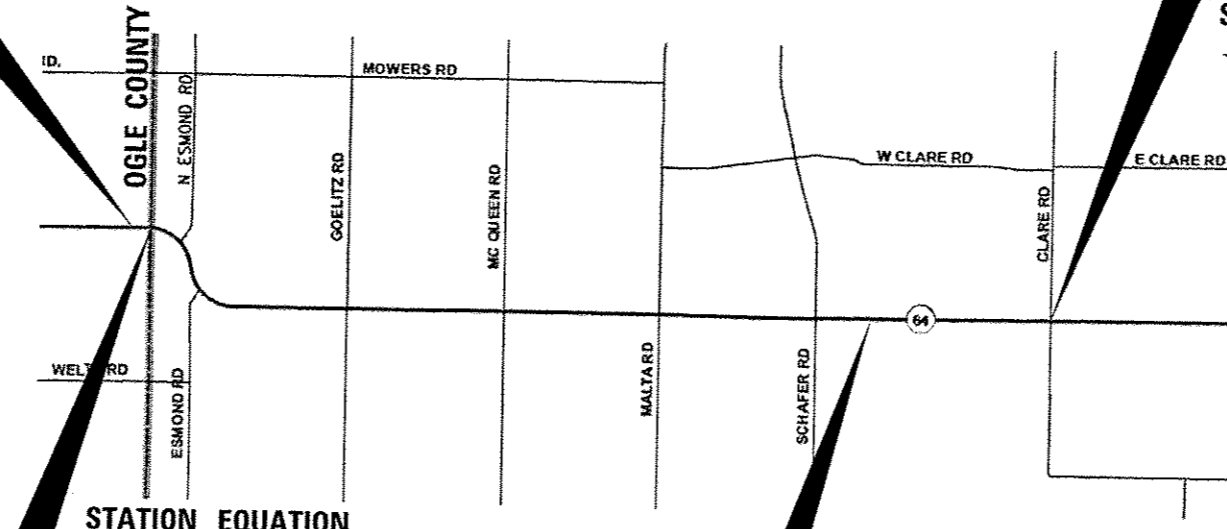

STATION EQUATION
 2082 + 64.5 BK = 0 + 00 AH

OMISSION
 SN 019-0040
 STA 258 + 27 TO 258 + 95

GROSS LENGTH = 32664.5 FT. = 6.186 MILE
 NET LENGTH = 32596.5 FT. = 6.174 MILE



PROJECT ENGINEER: JOE KANNEL, PE
UNIT CHIEF: MICHELE LINDEMANN, PE
 DISTRICT NO. (815)-434-6131
 CONTRACT NO. 66D36

RURAL MINOR ARTERIAL
 2013 ADT = 4650
 P.V. = 81.7%
 S.U. = 9.7%
 M.U. = 8.6%

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS

SUBMITTED *Dec 6 2013*
and A. Lankford
 DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

Jan 24 2014
John D. Baranzelli, PE
 ENGINEER OF DESIGN AND ENVIRONMENT

Jan 24 2014
Omer Osman, PE
 DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS