


* Remove portion of Wingwall as required at corners to allow clearance for new deck overhang. Cut Reinforcement Bars flush and seal surface with epoxy. Cost included with Concrete Removal.

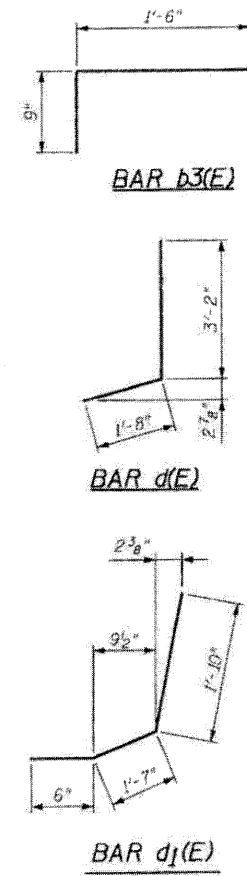

BILL OF MATERIAL				
Bar	No.	Size	Length	Shape
a10(E)	9	#5	24'-3"	—
a11(E)	9	#5	19'-11"	—
a12(E)	6	#6	4'-0"	—
b3(E)	40	#5	2'-3"	┌
d(E)	5	#4	4'-10"	J
d1(E)	5	#5	3'-11"	J
h(E)	4	#6	24'-3"	—
h1(E)	4	#6	19'-11"	—
Reinforcement Bars, Epoxy Coated		Pound	850	
Concrete Removal		Cu. Yd.	6.7	
Concrete Superstructure		Cu. Yd.	7.6	
Bar Splicers		Each	13	
Protective Coat		Sq. Yd.	3	

*** Quantity for Top & Inside Face of Reconstructed Parapets

PROPOSED PLAN
SOUTH ABUTMENT AT
SOUTHBOUND STRUCTURE

LEGEND:
O.F. = Outside Face
I.F. = Inside Face