


P.O.L. 5+49.29 (HOOTS CHAPEL)
MAG NAIL

BENCH MARKS

BM#250: CHISELED CENTERED ON TOP OF THE N. CONCRETE BRIDGE CURB FOR SN: 061-0066 ELEVATION = 527.907'

BM#251: CHISELED CENTERED ON TOP OF THE NE. WINGWALL OF BRIDGE SN: 061-2008 ELEVATION = 530.207'

BM#252: RR SPIKE DRIVEN 1' ABOVE GROUND LEVEL ON THE SOUTH SIDE OF A POWER POLE LOCATED IN THE NW QUADRANT OF THE INTERSECTION OF U.S. 50 AND HOOTS CHAPEL RD SN: 061-2008 ELEVATION = 530.207'

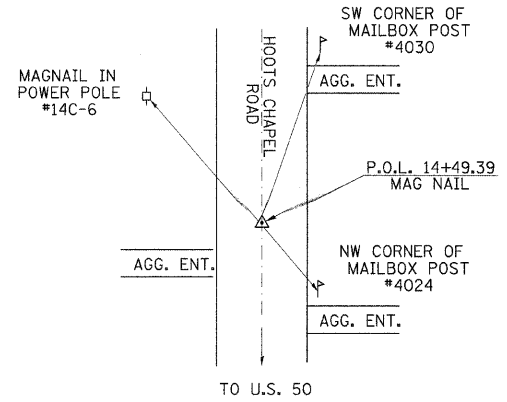

P.O.L. 14+49.39 (HOOTS CHAPEL)
MAG NAIL

FILE NAME =	USER NAME = dintelmanjn	DESIGNED -	REVISIED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TIE POINTS & BENCHMARKS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
ct:\pwork\psidot\dintelmanjn\d0153208\75d43-sht-plan.dgn	DRAWN -	REVISIED -	327			17RS-3	MARION	96	22	
PLOT SCALE = 50.0000' / 1"	CHECKED -	REVISIED -	CONTRACT NO. 76D42							
PLOT DATE = 3/16/2010	DATE -	REVISIED -	FED. ROAD DIST. NO. - ILLINOIS FED. AID PROJECT							
		SCALE: _____	SHEET NO. ___ OF ___ SHEETS	STA. _____ TO STA. _____						