
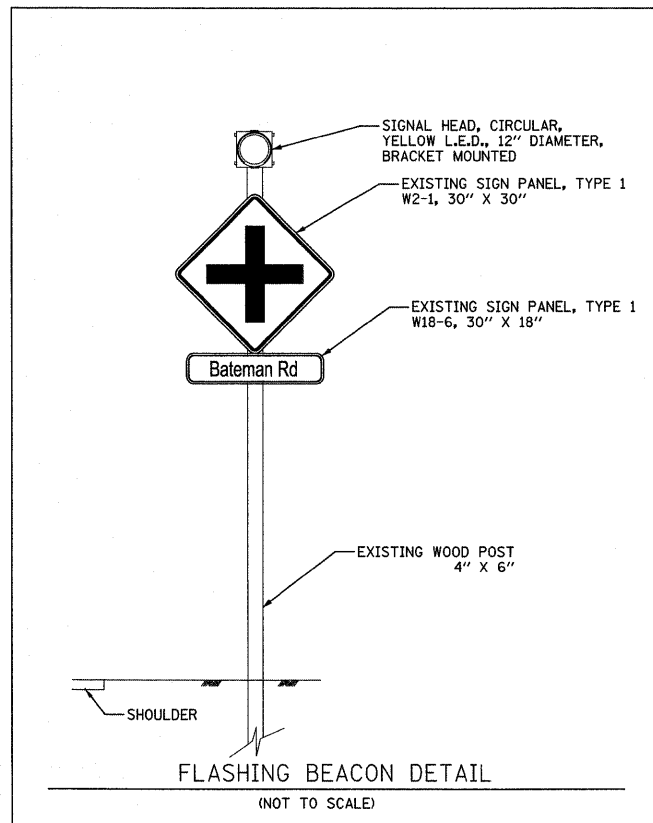


TRAFFIC SIGNAL NOTES

1. REMOVE EXISTING YELLOW L.E.D. MODULE AND REPLACE WITH NEW YELLOW L.E.D. MODULE IN EXISTING SIGNAL HOUSING. REUSE EXISTING CABLES AND FLASHER CONTROLLER. REPLACE EXISTING TYPE 1 SIGN PANELS.
2. INSTALL NEW SOLAR POWERED FLASHING BEACON ASSEMBLY AND TYPE 1 SIGN PANELS AS SHOWN ON THE DETAIL.

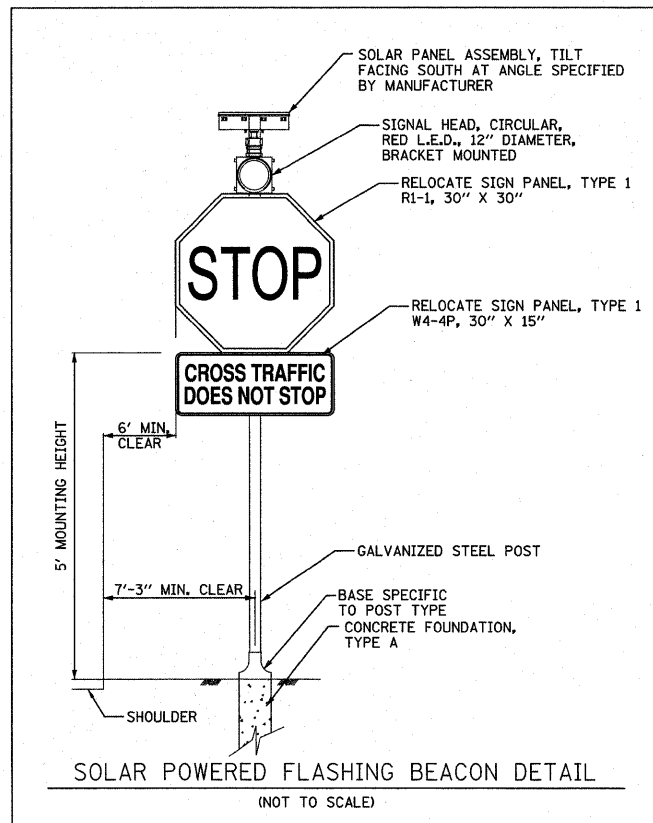

SCHEDULE OF QUANTITIES		
PAY ITEM	UNIT	QUANTITY
REMOVE SIGN PANEL ASSEMBLY - TYPE B	EACH	2
RELOCATE SIGN PANEL - TYPE 1	SQ FT	19
MAINTENANCE OF EXISTING FLASHING BEACON INSTALLATION	EACH	1
TRAFFIC SIGNAL POST, GALVANIZED STEEL 10 FT.	EACH	2
CONCRETE FOUNDATION, TYPE A	FOOT	8
SIGNAL HEAD, L.E.D., 1-FACE, 1-SECTION, BRACKET MOUNTED, RETROFIT	EACH	2
POST-MOUNTED FLASHING BEACON - SOLAR-POWERED INSTALLATION	EACH	2