

CONCRETE SLAB (SEE DETAIL "F" AND NOTE 7)
COVER OVER PIPE FROM 13" (330) TO 24" (600 TRENCH BACKFILL REQUIRED (150) INSPECTION WELL PAVED DITCH SECTION DETAIL "E" - PIPE TEE CLASS SI CONCRETE COLLAR COVER OVER PIPE PIPE TEE-FROM 6" (150) TO DETAIL "B" CLASS SI CONCRETE COLLAR STORM SEWER, PROTECTED

6" (150) STORM SEWER, ∠ABANDONED FIELD TILE BLOCK PER ARTICLE 611.03 AT PROPOSED BACKSLOPE OUTLET DETAIL "A" UPSTREAM END OF EXISTING TILE TO REMAIN IN PLACE (600) BELOW PROPOSED GRADE PIPE TEE EXISTING FIELD TILE -DETAIL "B" EXISTING FIELD TILE METHOD 'A' (4 LANE) STORM SEWER FLOW LINE ABOVE PROPOSED DITCH FLOW LINE

METHOD 'A' (2 LANE)

STORM SEWER FLOW LINE ABOVE PROPOSED DITCH FLOW LINE

METHOD 'B' (2 LANE)


STANDARD SIZES

STORM SEWER

6" (150) 8" (200)

OR GREATER

10" (250)

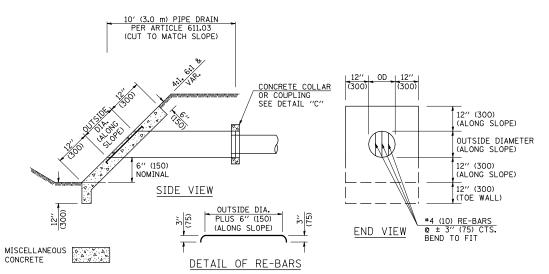



RISER

6" (150) 6" (150)

10" (250

FOR PLASTIC PIPE, THE RISER MAY BE OF THE SAME SIZE AS THE PIPE, BUT SHALL NOT BE SMALLER THAN 4" (100 mm) DIAMETER.

三川川川川川川川

TRENCH BACKFILL REQUIRED TRENCH BACKFILL REQUIRED CONCRETE SLAB (SEE DETAIL "F" AND NOTE 7)
COVER OVER PIPE FROM 13" (330) TO 24" (600) INSPECTION WELL (DETAIL "D") (150) 6" (150) PIPE TEE CLASS SI CONCRETE COLLAR COVER OVER PIPE PIPE TEE FROM 6" (150) TO CLASS SI CONCRETE COLLAR DETAIL "B" 13" (330) METHOD 'B' (4 LANE)

STORM SEWER LESS THAN 2' (600 mm) BELOW DITCH FLOW LINE AND STORM SEWERS CROSSING UNDER PAVEMENTS AND PAVED DITCHES

(75)

WELDED WIRE /

GENERAL NOTES

1. EXISTING FIELD TILE ENCOUNTERED BY EXPLORATION TRENCH SHALL BE INSPECTED BY THE ENGINEER FOR UNOBSTRUCTED FLOW WITHIN THE LIMITS OF THE RIGHT-OF-WAY.

SEE NOTE #9

INSPECTION WELL

DETAIL "D"


9" (230) TO

I.D. STORM


SEWER SPECIAL

15" (380)

- 2. ONLY FIELD TILE THAT DOES NOT HAVE SATISFACTORY FLOW AND OR HAS VISIBLE SIGNS OF DETERIORATION (SINK HOLES, ETC.) SHALL BE REPLACED WITHIN THE LIMITS OF THE RIGHT-OF-WAY IN ACCORDANCE
- 3. INSPECTION WELLS SHALL BE CONSTRUCTED APPROXIMATELY 6" (150 mm) INSIDE OF BOTH RIGHT-OF-WAY LINES AT ALL FIELD TILE LOCATIONS.
- 4. EXISTING FIELD TILE ABANDONED UNDER EXISTING PAVEMENTS OR PAVED SHOULDERS SHALL BE FILLED WITH FLOWABLE GROUT AS DIRECTED BY THE ENGINEER. THIS WORK WILL BE PAID FOR ACCORDING TO ARTICLE 109.04.
- 5. NON-CIRCULAR FIELD TILE SHALL BE REPLACED WITH STORM SEWER, SPECIAL OF AT LEAST THE SAME CROSS SECTIONAL AREA. ALL EXISTING FIELD TILE SHALL BE REPLACED WITH STORM SEWER OF THE TYPE REQUIRED FOR THE MINIMUM DEPTH OF COVER.
- 6. THE 6" (150 mm) CONCRETE SLAB OR DITCH LINING SHALL BE POURED THE LENGTH OF THE TRENCH AT ALL DITCH FLOW LINE LOCATIONS WITHIN THE RIGHT-OF-WAY WITH LESS THAN 2" (600 mm) OF EARTH COVER. MISCELLANEOUS CONCRETE SHALL BE USED ACCORDING TO SECTION 611.
- 7. ALL MISCELLANEOUS SLABS, APRONS AND DITCH LININGS SHALL BE REINFORCED WITH WELDED WIRE FABRIC AS SHOWN FOR PAVED DITCH
- 8. HEADWALL FOR BACKSLOPE OUTLET MAY BE USED FOR PIPE DRAIN DIAMETERS UP TO 10" (250 mm). SPECIAL DESIGNS WILL BE REQUIRED
- 9. THE INSPECTION WELL LID FOR P.C.C. PIPE SHALL BE CONSTRUCTED OF 3/8" (10 mm) CAST IRON AND PROVIDED WITH A 1" (25 mm) DIAMETER HOLE IN CENTER. THE LID FOR THE OTHER PIPE MATERIALS SHALL BE A GRATE ASSEMBLY PREFABRICATED FOR AND COMPATIBLE WITH THE PIPE SYSTEM.



DETAIL "E"

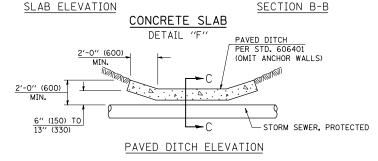

MISCELLANEOUS CONCRETE 6" (150) NOMINAL

15" (380)

END SLAB

酬酬


24" (600)

- STORM SEWER, PROTECTED

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

| | | | DISTRICT 5 DETAIL NO. 61101011A |
|----------------------|-------------------------|-------------|--|
| | | | FIELD TILE SYSTEMS (TREATMENT OF EXISTING) |
| DATE 11/06 | REPLACED DETAIL A-18.02 | NAME TJB | ILLINOIS DEPARTMENT OF TRANSPORTATION |

HEADWALL FOR BACKSLOPE OUTLET DETAIL "A"

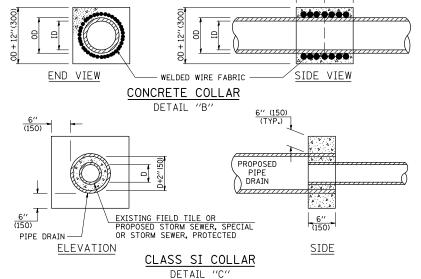

(250) (250)

DATE VAME SCALE NAME PLOT FILE PLOT USER