


NOTES:
 1. TYPICAL TREE SPACING IS 20' X 20'.
 2. TREES SHALL NOT BE LOCATED WITHIN 10' OF ANY UNDERGROUND UTILITY.
 3. TREES SHALL NOT BE PLACED ON SLOPES STEEPER THAN 3:1.

KEY

	TREES TO BE REMOVED
AS 2-1/2"	TREE, ACER SACCHARUM (SUGAR MAPLE), 2-1/2" CALIPER, BALLED AND BURLAPPED
OP 2-1/2"	TREE, QUERCUS PALUSTRIS (PIN OAK), 2-1/2" CALIPER, BALLED AND BURLAPPED
OR 2-1/2"	TREE, QUERCUS RUBRA (RED OAK), 2-1/2" CALIPER, BALLED AND BURLAPPED
CC 2"	TREE, CERCIS CANADENSIS (EASTERN REDBUD), 2" CALIPER, TREE FORM, BALLED AND BURLAPPED
MS 2"	TREE, MALUS SNOWDRIFT (SNOWDRIFT CRAB APPLE), 2" CALIPER, TREE FORM, BALLED AND BURLAPPED
PS 3"	EVERGREEN, PINUS STROBUS (EASTERN WHITE PINE), 3" CALIPER, BALLED AND BURLAPPED

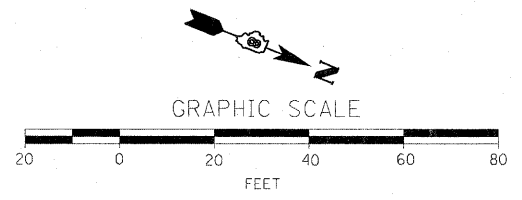

FILE NAME = 0876830-sht-1ndsep.dgn	USER NAME = ldo	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LANDSCAPE PLAN			F.A. RTE. 600	SECTION 60-(30.31.128)-1	COUNTY	TOTAL SHEETS 399	SHEET NO. 238
	PLOT SCALE = 1:200	DRAWN -	REVISED -		SCALE: 1:20	SHEET NO.	OF	SHEETS	STA. 151+00.00 TO STA. 157+00.00	CONTRACT NO. 76830		
	PLOT DATE = 12/17/2009	CHECKED -	REVISED -									
		DATE -	REVISED -									